


## Red Door Homes Hanover

Products				
PlotID	Net Qty	Product	Length	Plies
1	3	11-7/8" BCI® 4500s-1.8	36' 0"	1
2	15	11-7/8" BCI® 4500s-1.8	30' 0"	1
3	1	11-7/8" BCI® 4500s-1.8	29' 0"	1
4	13	11-7/8" BCI® 4500s-1.8	22' 0"	1
5	15	11-7/8" BCI® 4500s-1.8	14' 0"	1
6	1	11-7/8" BCI® 4500s-1.8	13' 0"	1
7	1	11-7/8" BCI® 4500s-1.8	8' 0"	1
8	1	11-7/8" BCI® 4500s-1.8	6' 0"	1
Rm-1	9	1" x 11-7/8" BC RIM BOARD OSB	12' 0"	1
Bk1	65	11-7/8" BCI® 4500s-1.8	2' 0"	1

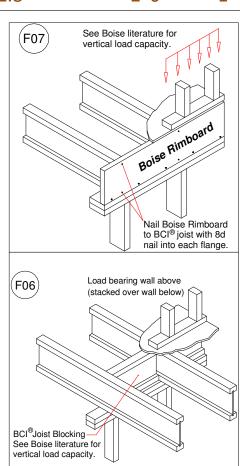

All I-Joist and Versa-Lam Beams Must be Installed per The Boise Cascade Installation Guide!

Squash Blocks Required Under The Ends Of All LVL And Point Loads For Load Transfer - See Details

Red Door Homes Hanover

BC FRAMER II

Plan Date: 8/9/2019

Structural Date: 11/17/2020

Sheet: 1/4

By: GAT