


Highland Grove 4-Bedroom Septic Proposal Lot #18

18

35,319 SQ.FT.

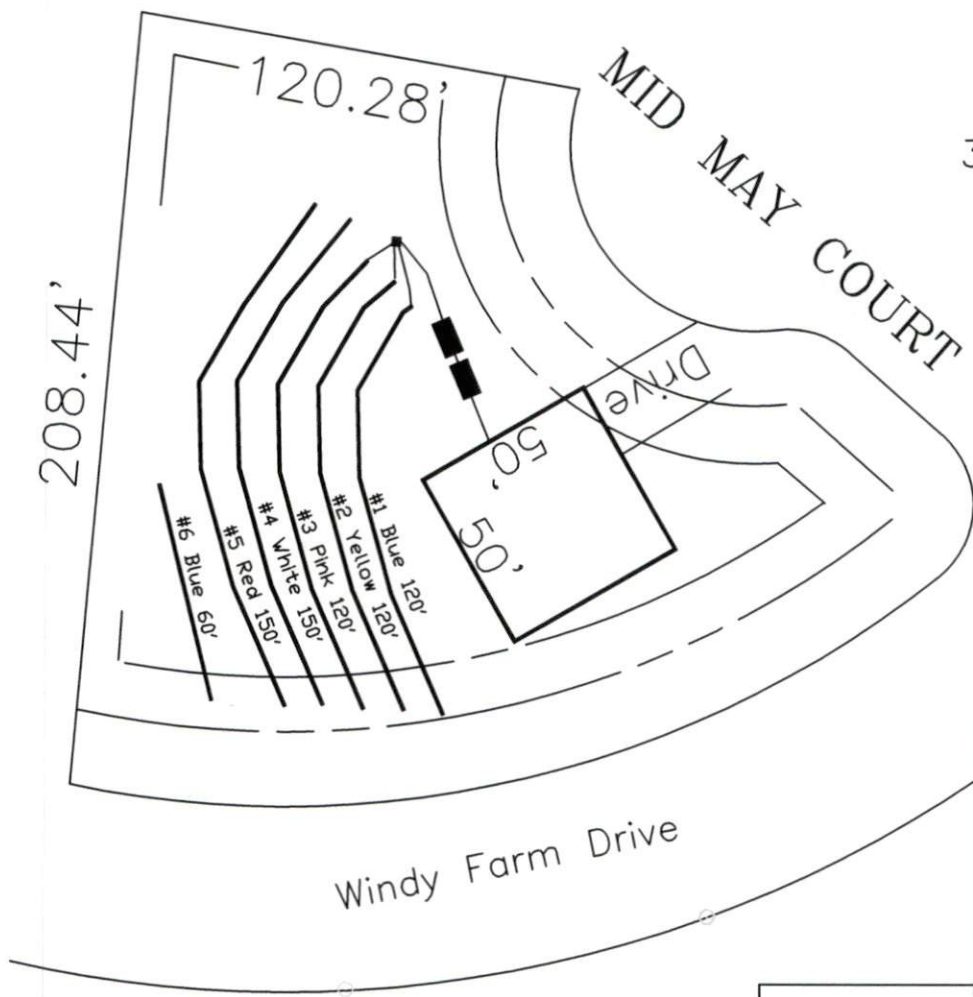

This drawing represents a preliminary septic plan made prior to final construction activities. A revised plan may need to be reworked at time of permitting.

System: Pump to D-Box
 Lines: 1-3 (360')
 0.35 LTAR
 24" Trench Bottom
 Accepted Status System
 Repair: Pressure Manifold
 Lines: 4-6 (360')
 0.35 LTAR
 24" Trench Bottom
 Accepted Status System

Adams
 Soil Consulting
 919-414-6761
 Job #561