


Highland Grove
5-Bedroom Septic Proposal
Lot #41

41

35,315
SQ.FT.

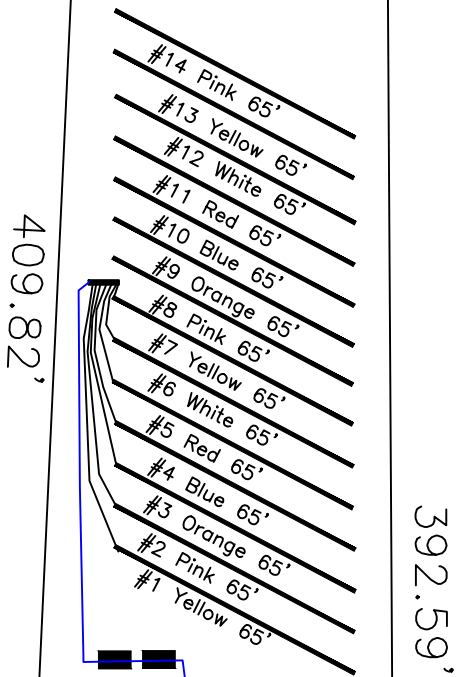

This drawing represents a preliminary septic plan made prior to final construction activities.

System: Pressure Manifold
Lines: 1-7 (455')
0.35 LTAR
24" Trench Bottom
Accepted Status System
Repair: Pressure Manifold
Lines: 8-14 (455')
0.35 LTAR
24 Trench Bottom
Accepted Status System

GRAPHIC SCALE
1" = 50'



Windy Farm Drive

Adams
Soil Consulting
919-414-6761
Job #561