ROOF TRUSS NOTES:

DO NOT CUT, DRILL, NOTCH, OR OTHERWISE DAMAGE TRUSSES. Contact your BFS Representative for assistance PRIOR TO modifying

any truss. Espanol - (NO CORTE, PERFORE, HAGA MUESCAS O DANE DE CUALQUIER OTRA MANERA LAS TRUSSES (CERCHAS DE MADERA) Contacte a su representante de BFS para sistencia ANTES de realizar cualquier

nodification.) This Truss Placement Diagram is intended to serve as a guide for truss installation. This Diagram has been prepared by a Truss Technician and is not an engineered drawing.

 The responsibilities of the Owner, Building Designer, Contractor, Truss Designer, and Truss Manufacturer shall be as defined by the TPI 1 National Standard.

3. The wood components shown on this diagram are to be used in dry service (moisture content<19%) and non-toxic environmental applications. The metal plates and hangers are galvanized to the G60 Standard unless noted otherwise. 4. Refer to the Truss Design Drawings for specific

information about each individual truss design. 5 The Truss Technician shall provide Truss-to-Truss Connection Requirements. Any special or other connection shall be the responsibility of the Building Designer.

6. The Truss Placement Diagram and Truss Design Drawings are the property of Builders FirstSource and may not be reused or reproduced in part or in total under any circumstances without prior written authorization.

7. In some cases, field framing may be required to achieve the final appearance shown on the Construction Documents.

Field framing, including valley rafters, installed over roof trusses shall have a knee brace from the rafter to the truss top chord at intervals of 48" on center (O.C.) or less. Stagger knee braces from adjacent rafters such that the load is distributed uniformly over multiple truss locations and not concentrated at one location or along one truss.

9. Truss Top Chords shall be fully sheathed or have lateral bracing (purlins) spaced at 24" O.C. or less. Truss Bottom Chord Bracing shall not exceed the maximum shown on the Truss Design Drawing. Field framed bottom chord floor or ceiling attachments shall be spaced at 24" O.C. or less. Proper Bracing prevents buckling of individual truss members due to design loads. 10. This Placement Diagram is based upon the

supporting structure being structurally adequate, dimensionally correct, square, plumb, and level to adequately support the trusses. The foundation design, structural member sizing, load transfer, bearing conditions, and the structure's compliance with the applicable building code are the responsibility of the Owner, Building Designer, and Contractor. 11. If Piggyback Trusses are included in this project, refer to the Mitek Piggyback Connection Detail applicable for the project details and wind load

category. 12. The Contractor shall follow the SBCA TTB Partition Separation Prevention and Solutions for truss attachment to non-load bearing walls and carefully complete these details to avoid gypsum wall board related issues.

WARNING:

TRUSSES MUST BE BRACED DURING INSTALLATION. FAILURE TO DO SO MAY RESULT IN INJURY OR DEATH. Espanol - (TRUSSES (CERCHAS) DEBERAN TENER UN SOPORTE DURANTE LA INSTALACION.

NO HACERLO PODRIA RESULTAR EN LESIONES O MUERTE.) Trusses shall be installed in a safe manner meeting

all code, local, OSHA, TPI, and BCSI Specifications. Failure to follow these specifications may result in injury or death.

. Buildings under construction are vulnerable to high winds and present a possible safety hazard. The Contractor is responsible for recognizing adverse eather conditions and shall take appropriate action to

prevent injury or death. BCSI INSTRUCTIONS SHALL BE FOLLOWED:

BCSI-B1 = Safe Truss Handling and Installation BCSI-B2 = Installation and Temporary Restraint BCSI-B3 = Permanent Restraint

BCSI-B4 = Safe Construction Loading

BCSI-B5 = Truss Damage and Modification Guidelines BCSI-B7 = Floor Truss Installation

BCSI-B8 = Toe-Nailed Connections


BCSI-B9 = Multi-Ply Girders


BCSI-B10 = Post Frame Truss Installation

BCSI-B11 = Fall Protection

Follow TPI Requirements for Long Span Trusses (>60').



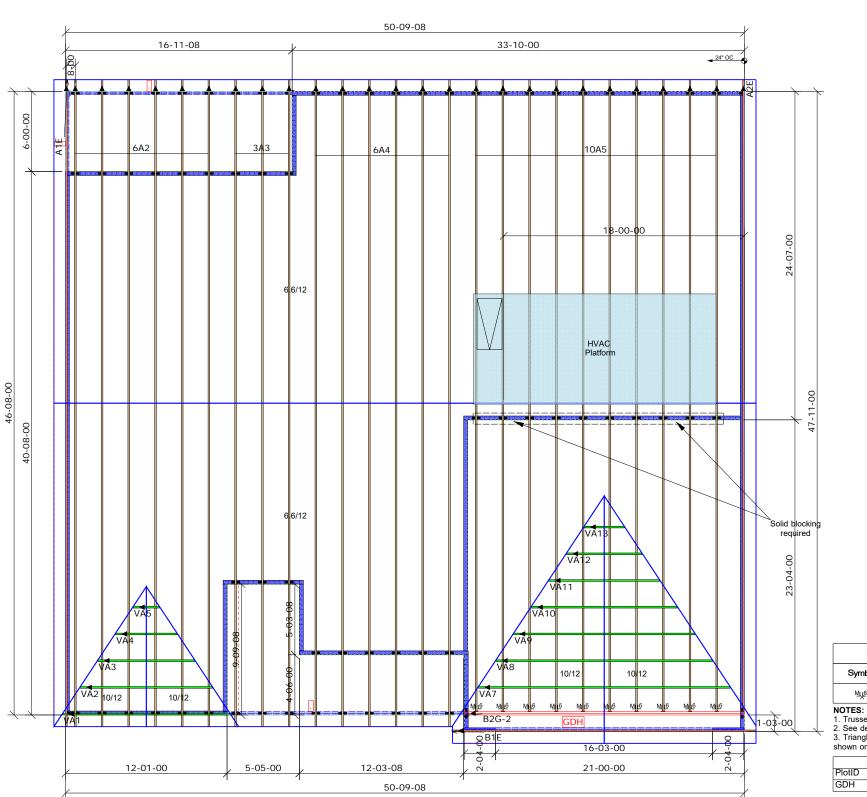



Symbol Name <u>Мц6</u> HTU26 1. Trusses are @24" typical. 2. See design drawings for addi 3. Triangle on layout indicates le

shown on design drawings. Do PlotID Length Produc GDH 22-00-00 1-3/4" >

							No Scale				
						Until the building is completely erected in accordance with plans, the trusses may be unstable and present a safely hazard. Truss instability may increase with building width, height, and length. Buildings under construction and reverse to be and present a possible safety hazard. It is the responsibility of the contractor and framer to recognize adverse weather conditions and take prompt and appropriate action to content tif and pervent injury. Prior setting trusses. Trusser to Building Comparison (Brasil) document breeded by SBCA and TPI. Follow BCSI Specifications for Erection and Bracing.	Customer Name: Lamco Custom Homes	DUIDELS Subdivision: .		Albemarle, NC File Name	
						is, the tr le safety o Buildin					
			1			vith plan a possibl . refer to		Rev	isions	5:	
	erial Scheo	dule QTY				ance v esent usses					
bol	Name HTU26	10				cord: Nd pre	,				
			ļ			in ac ds ar setti					
esign d Ile on la	es are @24" typical. esign drawings for additional notes/detail. le on layout indicates left side of truss as n design drawings. Do not install backwards.							Job number 2310930			
Leng	Products Length Product Plies Net Qty								vn By		
	22-00-00 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP 2 2								AG		
						ding is cc are vulne d prever	4		ATE:)/202	0	
						ntil the buil Instruction otect life ar			e Number Of 1		
						12 8 2					