


Windy Hill 4-Bedroom Septic Proposal Lot #25

Windy Farm Drive

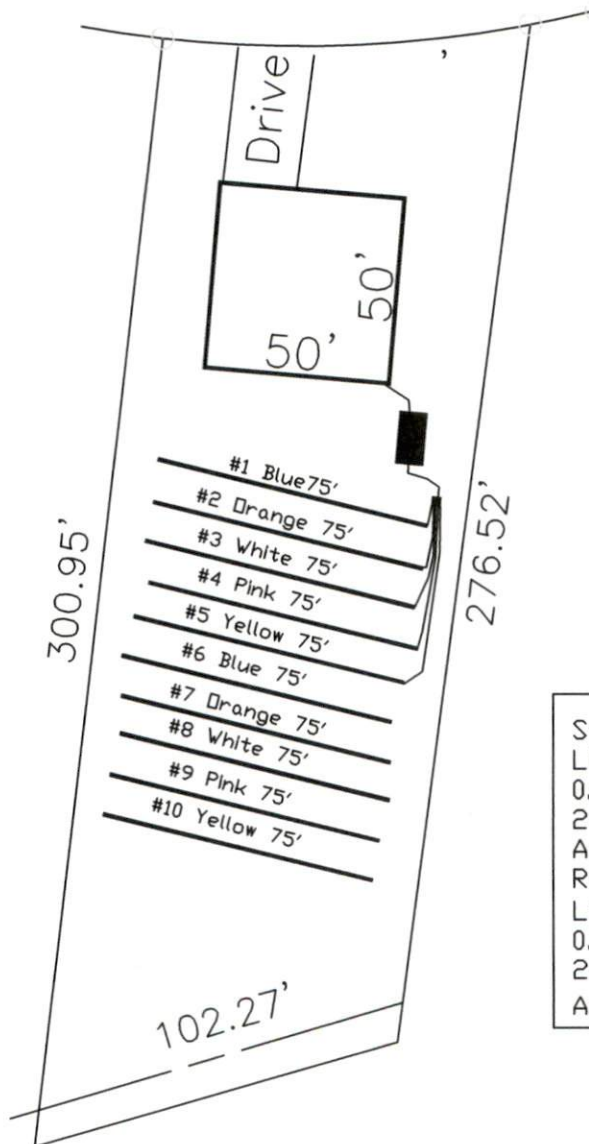

This drawing represents a preliminary septic plan made prior to final construction activities. A revised plan may need to be reworked at time of permitting.

*If plumbing is not sufficient a separate pump and tank may be required.

25

27,515 SQ.FT.

System: Gravity to D-Box
 Lines: 1-5 (350')
 0.35 LTAR
 24" Trench Bottom
 Accepted Status System
 Repair: Serial Dist.
 Lines: 6-10 (350')
 0.35 LTAR
 24 Trench Bottom
 Accepted Status System

GRAPHIC SCALE
1" = 50'



Adams
Soil Consulting
919-414-6761
Job #561