


# Highland Grove 3-Bedroom Septic Proposal Lot #13

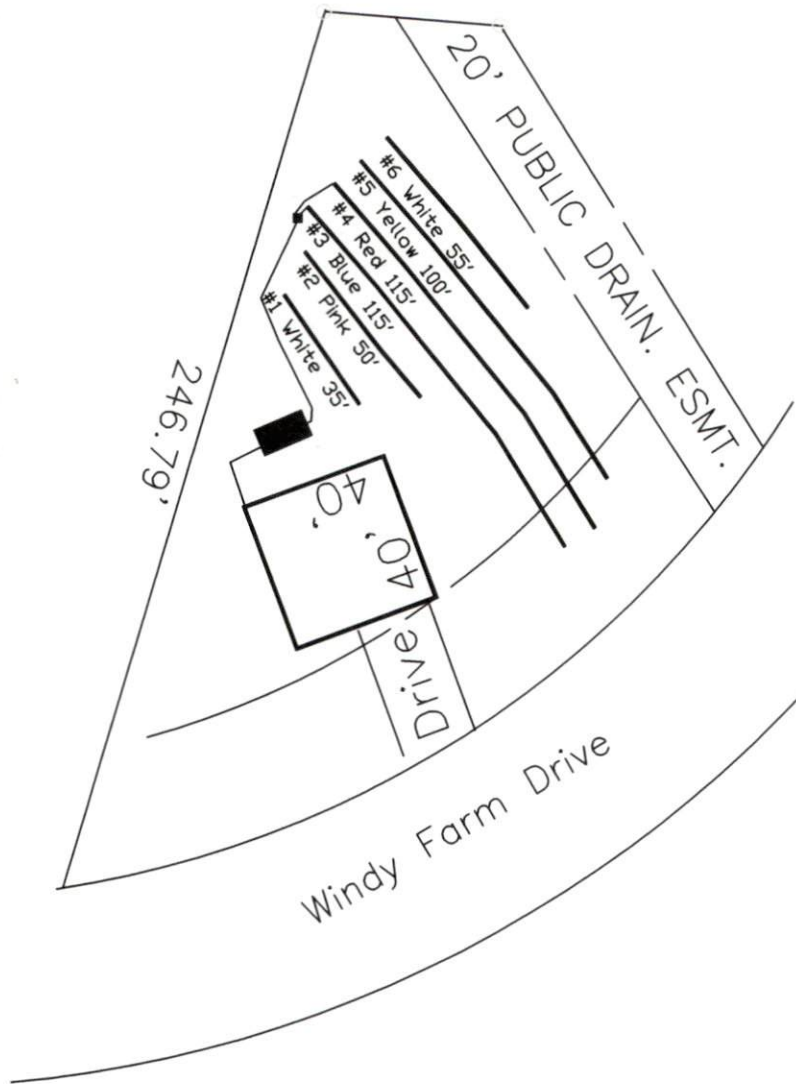

13

30,069 SQ.FT.

\*If plumbing is not sufficient a separate pump and tank may be required.

System: Pump to D-Box  
 Lines: 3-4 (230')  
 0.4 LTAR  
 24' Trench Bottom  
 Accepted Status System  
 Repair: Serial Dist.  
 Lines: 1-2, 5-6 (240')  
 0.4 LTAR  
 18 Trench Bottom  
 Accepted Status System

This drawing represents a preliminary septic plan made prior to final construction activities. A revised plan may need to be reworked at time of permitting.

GRAPHIC SCALE  
1" = 50'



Adams  
Soil Consulting  
919-414-6761  
Job #561