

Mark Morris, P.E.

#126, 1317-M, Summerville, SC 29483

843 209-5784, Fax (866)-213-4614

The truss drawing(s) listed below have been prepared by **Atlantic Building Components** under my direct supervision based on the parameters provided by the truss designers.

AST #: 54878

JOB: 24-B007-F02

JOB NAME: LOT 0.0012 CAMPBELL RIDGE

Wind Code: N/A

Wind Speed: Vult= N/A

Exposure Category: N/A

Mean Roof Height (feet): N/A

These truss designs comply with IRC 2018 as well as IRC 2021.

20 Truss Design(s)

Trusses:

F201, F202, F203, F204, F205, F206, F208, F209, F210, F211, F212, F213, F214, F215, F216, F217, F218, F219, F220, F221



12/7/2024

Mark Morris

Warning !—Verify design parameters and read notes before use.


This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSL/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D’Onofrio Drive, Madison, WI

Job 24-B007-F02	Truss F201	Truss Type Floor Supported Gable	Qty 1	Ply 1	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC Job Reference (optional) # 54878
--------------------	---------------	-------------------------------------	----------	----------	--

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:18:54 2024 Page 1
ID:gUCksxzC6J7HT2yGkHFINYyiOvf-j2Yh8gb1ODbX674_E91vFP4ZGzFmmQd1Cxe8AyBJj?

0-1-8

Scale: 3/8"=1'

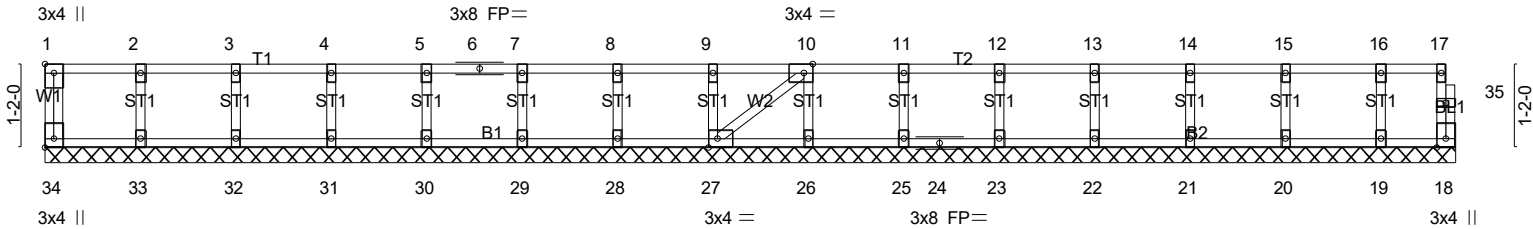

19-8-6
19-8-6

Plate Offsets (X,Y)-- [1:Edge,0-1-8], [10:0-1-8,Edge], [27:0-1-8,Edge], [34:Edge,0-1-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.06	Vert(LL)	n/a	-	n/a	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.01	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Rep Stress Incr	YES	WB 0.03	Horz(CT)	0.00	18	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH					Weight: 85 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 19-8-6.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 34, 18, 33, 32, 31, 30, 29, 28, 27, 26, 25, 23, 22, 21, 20, 19

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (7-8)
- All plates are 1.5x3 MT20 unless otherwise indicated.
 - Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION. Do not erect truss backwards.
 - Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard




12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC
24-B007-F02	F202	Floor	3	1	# 54878

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:18:55 2024 Page 1
 ID:gUCksxzC6J7HT2yGkHFINYiOvf-BWcwwUHdohMS8GhGYxhGSsx3Lg80VAimFshBgcyBJj



Scale = 1:32.7

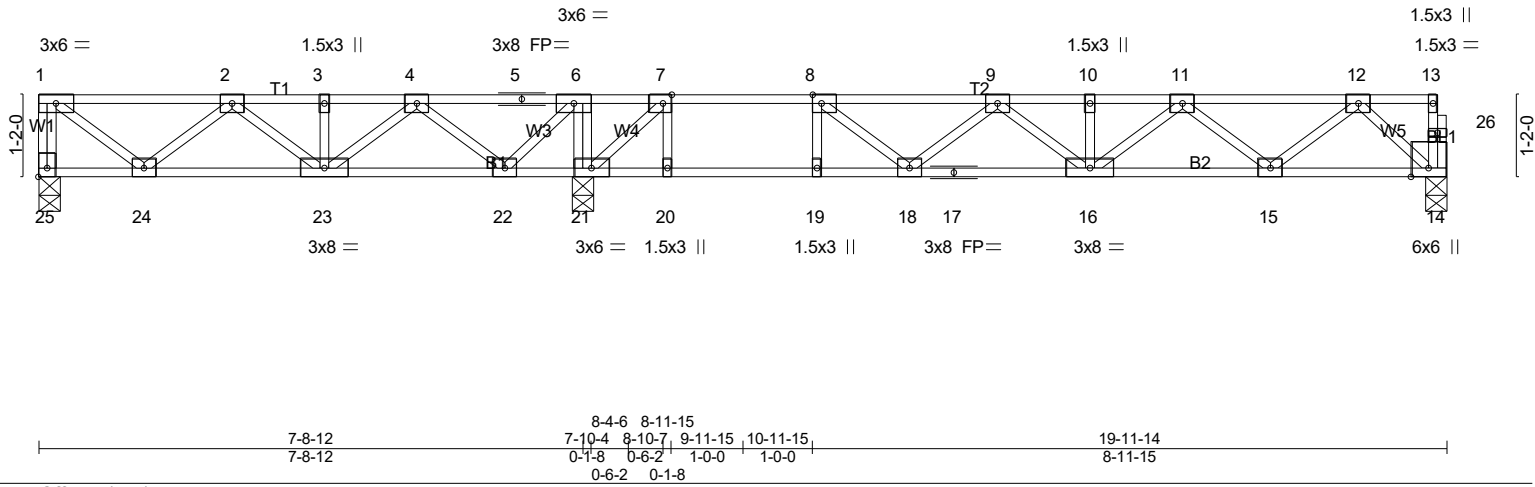


Plate Offsets (X,Y)-- [7:0-1-8,Edge], [8:0-1-8,Edge], [25:Edge,0-1-8]					
LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 40.0	1-7-3	TC 0.83	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.00	BC 0.74	Vert(LL) -0.22 18-19 >671 480		
BCLL 0.0	Lumber DOL 1.00	WB 0.29	Vert(CT) -0.30 18-19 >491 360		
BCDL 5.0	Rep Stress Incr YES	Matrix-SH	Horz(CT) 0.03 14 n/a n/a		
	Code IRC2021/TPI2014			Weight: 104 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP SS(flat) *Except* B2: 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 21-22.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (lb/size) 25=370/0-3-8 (min. 0-1-8), 21=810/0-3-8 (min. 0-1-8), 14=551/0-3-6 (min. 0-1-8)
 Max Grav 25=375(LC 8), 21=810(LC 1), 14=560(LC 4)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 1-25=-371/0, 1-2=-376/0, 2-3=-754/0, 3-4=-754/0, 4-5=-528/0, 5-6=-528/0, 6-7=-310/40, 7-8=-1240/0, 8-9=-1658/0, 9-10=-1627/0, 10-11=-1627/0, 11-12=-1024/0
 BOT CHORD 23-24=0/697, 22-23=0/763, 21-22=-40/310, 20-21=0/1240, 19-20=0/1240, 18-19=0/1240, 17-18=0/1819, 16-17=0/1819, 15-16=0/1435, 14-15=0/582
 WEBS 7-20=0/406, 8-19=-349/0, 6-21=-344/27, 1-24=0/472, 2-24=-417/0, 4-22=-364/0, 6-22=0/389, 7-21=-1230/0, 8-18=0/566, 11-15=-535/0, 12-15=0/576, 12-14=-794/0

- NOTES-** (5-6)
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are 3x4 MT20 unless otherwise indicated.
 - 3) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 4) CAUTION, Do not erect truss backwards.
 - 5) Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - 6) Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard




12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-B007-F02	Truss F203	Truss Type Floor	Qty 4	Ply 1	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC Job Reference (optional) # 54878
--------------------	---------------	---------------------	----------	----------	--

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:18:57 2024 Page 1
ID:gUCksxzC6J7HT2yGkHFINYjiOvf-7ukhJ9iUKJcAOaregMjkXH0PqTqVz383jAAIjVjyBjy



Scale: 3/8"=1'

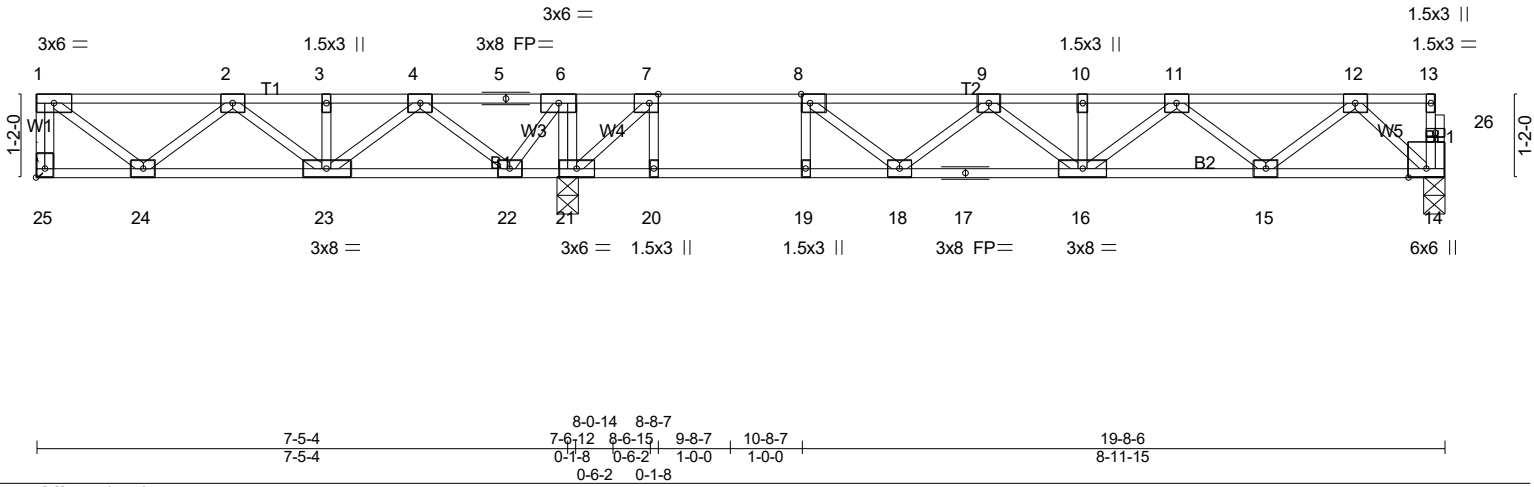


Plate Offsets (X,Y)-- [7:0-1-8,Edge], [8:0-1-8,Edge], [25:Edge,0-1-8]					
LOADING (psf)	SPACING- 1-7-3	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.83	Vert(LL) -0.22 18-19 >676 480	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.74	Vert(CT) -0.29 18-19 >494 360		
BCLL 0.0	Rep Stress Incr YES	WB 0.29	Horz(CT) 0.02 14 n/a n/a		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-SH			Weight: 103 lb FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP SS(flat) *Except* B2: 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 21-22.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (lb/size) 25=361/Mechanical, 21=792/0-3-8 (min. 0-1-8), 14=552/0-3-6 (min. 0-1-8)
Max Grav 25=366(LC 8), 21=792(LC 1), 14=561(LC 4)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-25=-362/0, 1-2=-365/0, 2-3=-723/0, 3-4=-723/0, 4-5=-476/0, 5-6=-476/0, 6-7=-308/35, 7-8=-1246/0, 8-9=-1662/0,
9-10=-1630/0, 10-11=-1630/0, 11-12=-1026/0
BOT CHORD 23-24=0/674, 22-23=0/712, 21-22=-35/308, 20-21=0/1246, 19-20=0/1246, 18-19=0/1246, 17-18=0/1822, 16-17=0/1822,
15-16=0/1437, 14-15=0/582
WEBS 7-20=0/409, 8-19=-347/0, 6-21=-332/11, 1-24=0/457, 2-24=-403/0, 4-22=-366/0, 6-22=0/365, 7-21=-1245/0,
8-18=0/562, 11-15=-536/0, 12-15=0/577, 12-14=-795/0

- NOTES-** (6-7)
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are 3x4 MT20 unless otherwise indicated.
 - 3) Refer to girder(s) for truss to truss connections.
 - 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 5) CAUTION, Do not erect truss backwards.
 - 6) Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - 7) Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard




12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-B007-F02	Truss F204	Truss Type Floor Supported Gable	Qty 1	Ply 1	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC Job Reference (optional) # 54878
--------------------	---------------	-------------------------------------	----------	----------	--

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:18:57 2024 Page 1
ID:gUCksxzC6J7HT2yGkHFINYyiOvf-7ukhJ9iUKJcAOaregMjkXH0bzT?mz7K3jAAIjVjBjy

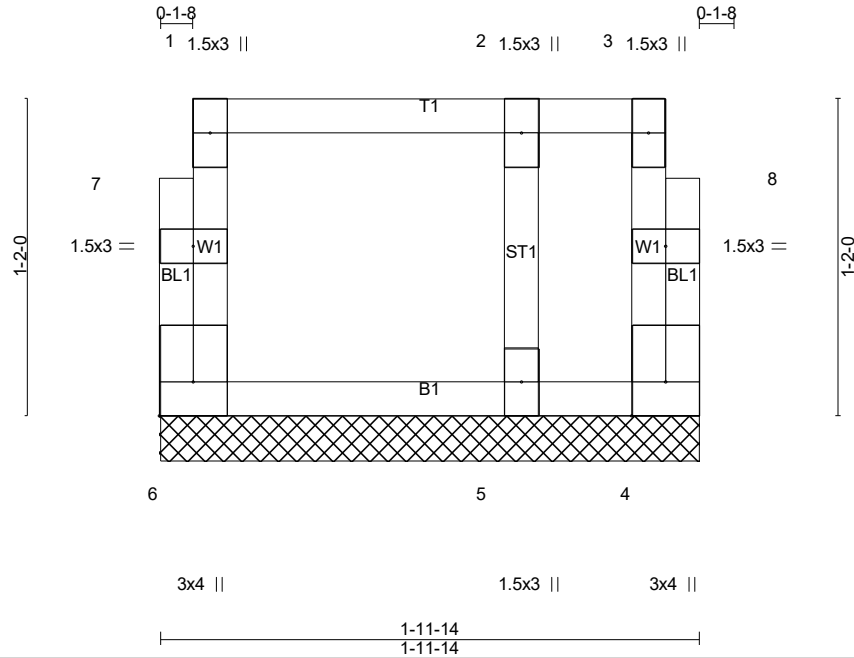

Scale = 1:8.5

Plate Offsets (X,Y)-- [6:Edge,0-1-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.05	Vert(LL)	n/a	-	n/a	999	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.02	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.02	Horz(CT)	0.00	4	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-R						Weight: 12 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)
OTHERS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 1-11-14 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 6=60/1-11-14 (min. 0-1-8), 4=21/1-11-14 (min. 0-1-8), 5=98/1-11-14 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES- (5-6)

- Gable requires continuous bottom chord bearing.
- Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- Gable studs spaced at 1-4-0 oc.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
- Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard



12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC
24-B007-F02	F205	Floor	4	1	Job Reference (optional) # 54878

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:18:58 2024 Page 1
 ID: gUCksxzC6J7HT2yGkHFINYiOvf-b5H3XVj65ck1?kQrD4Ez3VZbw63iURCyqvrGxyBjx



0-1-8
 0-5-15
 Scale = 1:35.6

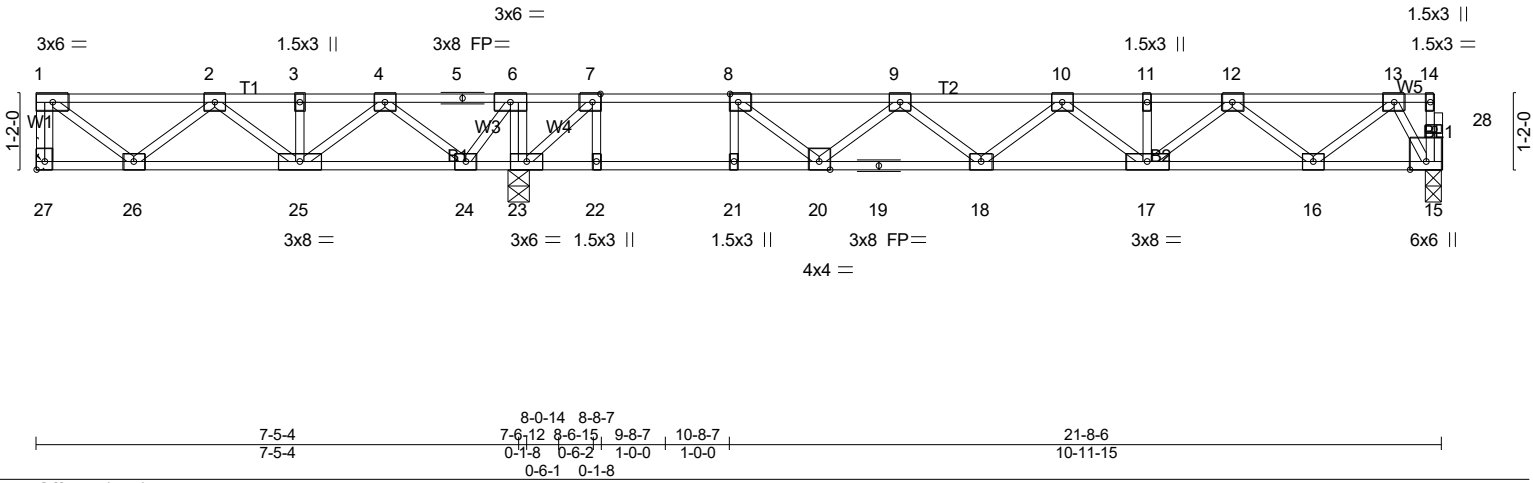


Plate Offsets (X,Y)-- [7:0-1-8,Edge], [8:0-1-8,Edge], [27:Edge,0-1-8]					
LOADING (psf)	SPACING- 1-7-3	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.74	Vert(LL) -0.29 20-21 >579 480	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.91	Vert(CT) -0.40 20-21 >423 360		
BCLL 0.0	Rep Stress Incr YES	WB 0.41	Horz(CT) 0.03 15 n/a n/a		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-SH			Weight: 113 lb FT = 20%F, 11%E


LUMBER-	BRACING-
TOP CHORD 2x4 SP SS(flat) *Except* T1: 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP SS(flat) *Except* B2: 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 23-24.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (lb/size) 27=317/Mechanical, 23=949/0-3-8 (min. 0-1-8), 15=614/0-3-6 (min. 0-1-8)
 Max Grav 27=322(LC 8), 23=949(LC 1), 15=622(LC 4)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 1-27=-319/0, 1-2=-307/0, 2-3=-557/0, 3-4=-557/0, 7-8=-1201/0, 8-9=-1862/0,
 9-10=-2121/0, 10-11=-1841/0, 11-12=-1841/0, 12-13=-950/0
 BOT CHORD 25-26=0/565, 24-25=0/496, 22-23=0/1201, 21-22=0/1201, 20-21=0/1201, 19-20=0/2188,
 18-19=0/2188, 17-18=0/2063, 16-17=0/1490, 15-16=0/389
 WEBS 7-22=0/520, 8-21=-449/0, 6-23=-333/17, 1-26=0/385, 2-26=-335/0, 4-24=-394/0,
 6-24=0/454, 7-23=-1614/0, 8-20=0/871, 9-20=-439/0, 10-17=-283/0, 12-17=0/448,
 12-16=-703/0, 13-16=0/730, 13-15=-766/0

- NOTES-** (6-7)
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are 3x4 MT20 unless otherwise indicated.
 - 3) Refer to girder(s) for truss to truss connections.
 - 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 5) CAUTION, Do not erect truss backwards.
 - 6) Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - 7) Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard



12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-B007-F02	Truss F206	Truss Type Floor	Qty 2	Ply 1	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC Job Reference (optional) # 54878
--------------------	---------------	---------------------	----------	----------	--

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:00 2024 Page 1
ID: gUCksxzC6J7HT2yGkHFINYiOvf-YTPpyBlMcE_IF1aDLVGR9weyVhnNAPOVP8OyKpyBJiv



Scale = 1:36.0

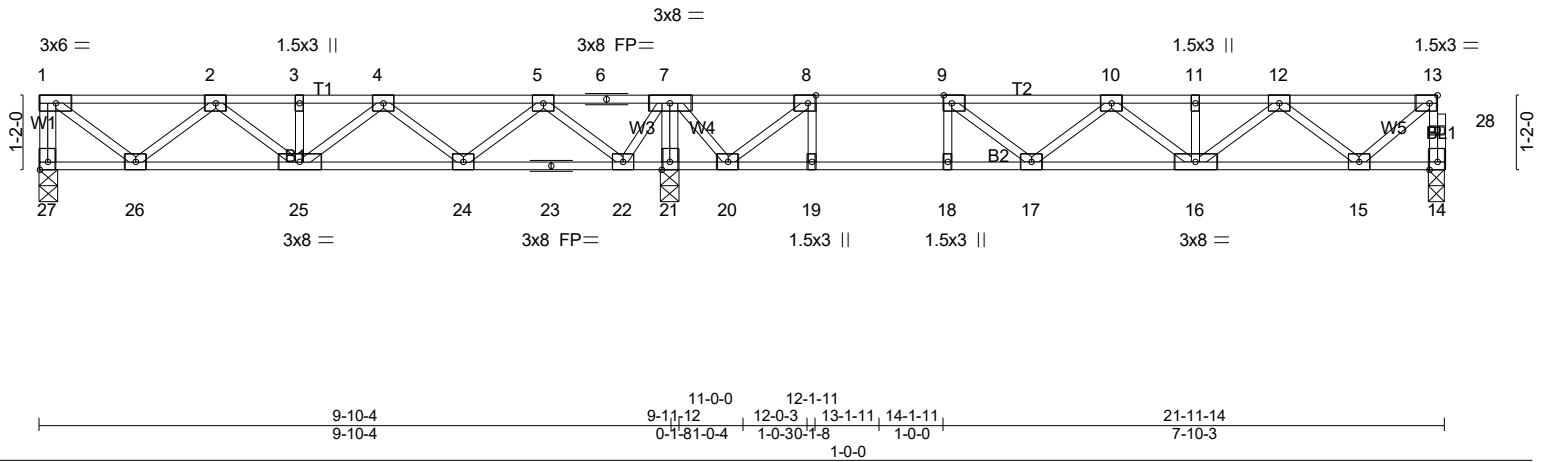


Plate Offsets (X,Y)-- [8:0-1-8,Edge], [9:0-1-8,Edge], [13:0-1-8,Edge], [27:Edge,0-1-8]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	1-7-3 Plate Grip DOL 1.00	TC 0.67	Vert(LL)	-0.19	17-18	>771	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.98	Vert(CT)	-0.25	17-18	>568		
BCLL 0.0	Rep Stress Incr YES	WB 0.32	Horz(CT)	0.03	14	n/a		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-SH						
							Weight: 114 lb	FT = 20%F, 11%E

LUMBER-

TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 2-2-0 oc bracing.

REACTIONS. (lb/size) 27=415/0-3-8 (min. 0-1-8), 14=513/0-3-6 (min. 0-1-8), 21=979/0-3-8 (min. 0-1-8)
Max Grav 27=427(LC 8), 14=532(LC 4), 21=979(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-27=-423/0, 14-28=-531/0, 13-28=-530/0, 1-2=-445/0, 2-3=-957/0, 3-4=-957/0,
4-5=-862/0, 7-8=-479/125, 8-9=-1267/0, 9-10=-1531/0, 10-11=-1326/0, 11-12=-1326/0,
12-13=-535/0


BOT CHORD 25-26=0/829, 24-25=0/1014, 23-24=0/683, 22-23=0/683, 21-22=-347/110, 20-21=-344/112,
19-20=0/1267, 18-19=0/1267, 17-18=0/1267, 16-17=0/1596, 15-16=0/1049

WEBS 8-19=0/333, 9-18=-287/0, 7-21=-858/0, 1-26=0/558, 2-26=-500/0, 4-24=-268/0,
5-24=0/301, 5-22=-601/0, 7-22=0/459, 8-20=-1059/0, 7-20=0/569, 9-17=0/410,
10-16=-346/0, 12-16=0/353, 12-15=-670/0, 13-15=0/675

NOTES- (5-6)

- Unbalanced floor live loads have been considered for this design.
- All plates are 3x4 MT20 unless otherwise indicated.
- Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- CAUTION, Do not erect truss backwards.
- Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
- Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard



12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-B007-F02	Truss F208	Truss Type Floor	Qty 1	Ply 1	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC Job Reference (optional) # 54878
--------------------	---------------	---------------------	----------	----------	--

Run: 8.630 s Jul 12 2024 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:00 2024 Page 1
ID:GUCksxzC6J7HT2yGkHFINYiOvf-YTPpyBIMcE_IF1aDLVGR9we3VhzcAQDVP8OyKpyBJv

1-3-0

0-7-8

Scale: 3/4"=1'

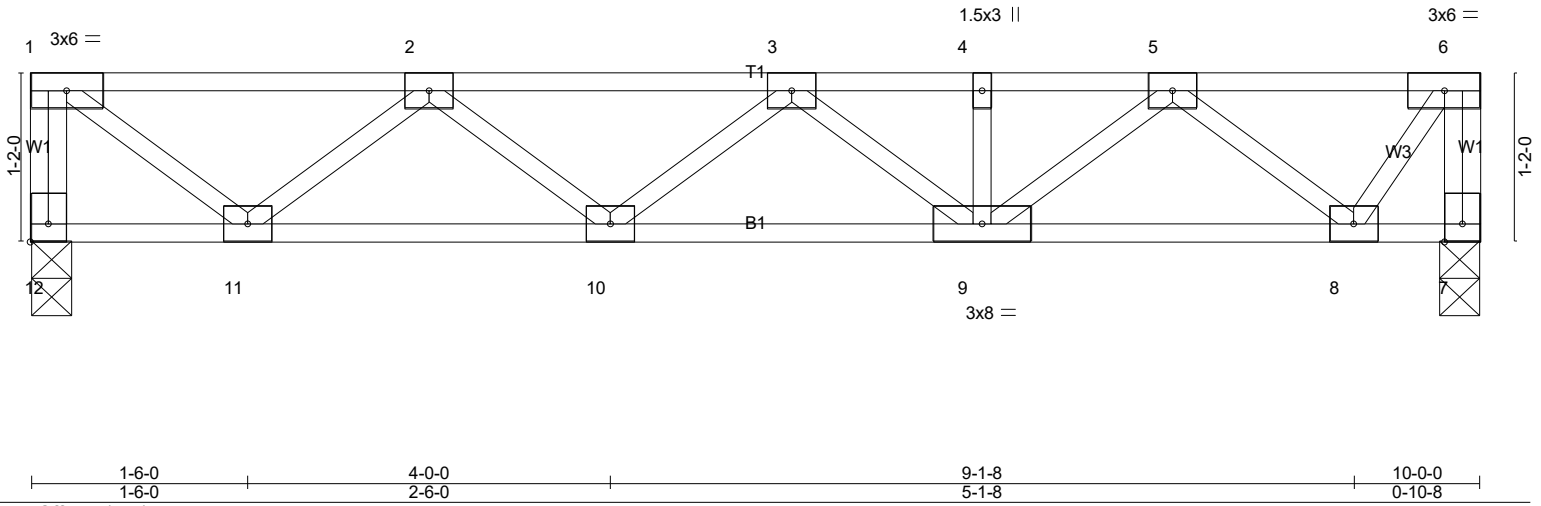


Plate Offsets (X,Y)-- [12:Edge,0-1-8]

LOADING (psf)	SPACING-	1-7-3	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.22	Vert(LL)	-0.02 9-10	>999	480	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.20	Vert(CT)	-0.03 9-10	>999	360		
BCLL 0.0	Rep Stress Incr	YES	WB 0.27	Horz(CT)	0.01 7	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						
								Weight: 54 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 12=429/0-3-8 (min. 0-1-8), 7=429/0-3-8 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-12=-424/0, 6-7=-429/0, 1-2=-450/0, 2-3=-941/0, 3-4=-902/0, 4-5=-902/0, 5-6=-261/0
BOT CHORD 10-11=0/839, 9-10=0/1019, 8-9=0/677
WEBS 1-11=0/564, 2-11=-507/0, 5-9=0/287, 5-8=-541/0, 6-8=0/447

- NOTES-** (3-4)
- All plates are 3x4 MT20 unless otherwise indicated.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard




12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC
24-B007-F02	F209	Floor	5	1	# 54878

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:01 2024 Page 1
 ID:gUCksxzC6J7HT2yGkHFINYyiOvf-0fzC9Xm_NX6csB9QvCogh7B6g58JvsZfeo8WsGyBJiu



Scale = 1:29.7


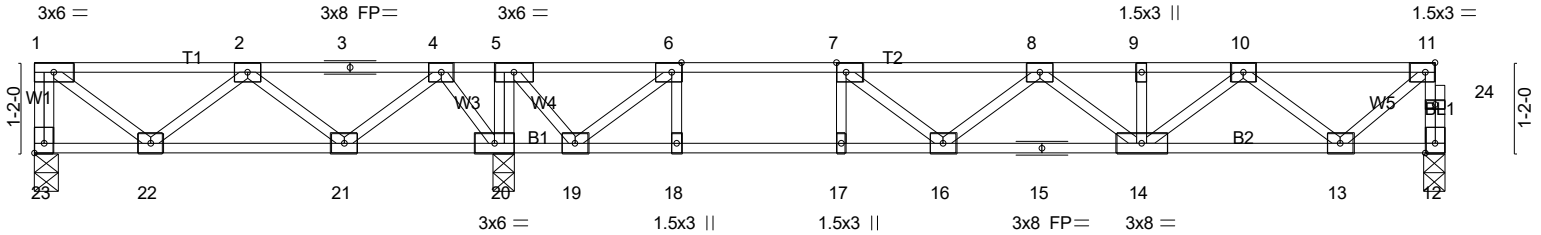


Plate Offsets (X,Y)-- [6:0-1-8,Edge], [7:0-1-8,Edge], [11:0-1-8,Edge], [23:Edge,0-1-8]

LOADING (psf)	SPACING-	1-7-3	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.64	Vert(LL)	-0.18 16-17	>809	480	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.94	Vert(CT)	-0.24 16-17	>595	360		
BCLL 0.0	Rep Stress Incr	YES	WB 0.33	Horz(CT)	0.02 12	n/a	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						
								Weight: 95 lb	FT = 20%F, 11%E

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP No.1(flat)
 WEBS 2x4 SP No.3(flat)

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:
 6-0-0 oc bracing: 19-20
 2-2-0 oc bracing: 17-18.

REACTIONS. (lb/size) 23=282/0-3-8 (min. 0-1-8), 12=533/0-3-6 (min. 0-1-8), 20=758/0-3-8 (min. 0-1-8)
 Max Grav 23=305(LC 8), 12=539(LC 4), 20=758(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 1-23=-301/0, 12-24=-538/0, 11-24=-537/0, 1-2=-287/0, 2-3=-480/0, 3-4=-480/0, 5-6=-552/0, 6-7=-1325/0,
 7-8=-1573/0, 8-9=-1351/0, 9-10=-1351/0, 10-11=-543/0
 BOT CHORD 21-22=0/525, 20-21=0/421, 18-19=0/1325, 17-18=0/1325, 16-17=0/1325, 15-16=0/1629, 14-15=0/1629, 13-14=0/1066
 WEBS 6-18=0/301, 7-17=-259/0, 5-20=-436/0, 1-22=0/360, 2-22=-310/0, 4-20=-337/0, 6-19=-1004/0, 5-19=0/574, 7-16=0/345,
 8-14=-355/0, 10-14=0/364, 10-13=-681/0, 11-13=0/686

- NOTES-** (5-6)
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are 3x4 MT20 unless otherwise indicated.
 - 3) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 4) CAUTION, Do not erect truss backwards.
 - 5) Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - 6) Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard



12/7/2024


Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC
24-B007-F02	F210	Floor Supported Gable	1	1	Job Reference (optional) # 54878

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:03 2024 Page 1
 ID:gUCksxzC6J7HT2yGkHFINYyiOvf-y25yaDnEv9MK6VJo0dq8mYGclu2LNrex56dcx8yBJis

0-1-8

Scale = 1:19.4

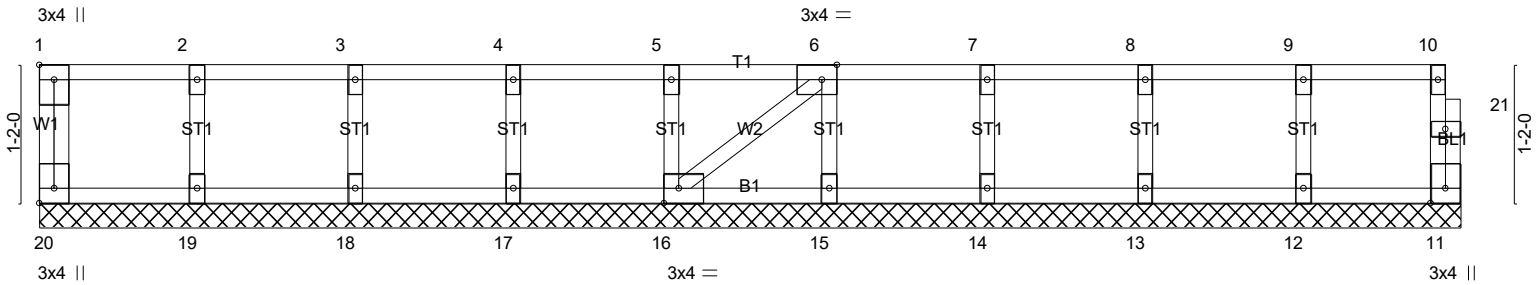

11-11-14
 11-11-14

Plate Offsets (X,Y)-- [1:Edge,0-1-8], [6:0-1-8,Edge], [16:0-1-8,Edge], [20:Edge,0-1-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.06	Vert(LL)	n/a	-	n/a	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.01	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Rep Stress Incr	YES	WB 0.03	Horz(CT)	0.00	11	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						
								Weight: 54 lb	FT = 20%F, 11%E

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP No.1(flat)
 WEBS 2x4 SP No.3(flat)
 OTHERS 2x4 SP No.3(flat)

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 11-11-14.
 (lb) - Max Grav All reactions 250 lb or less at joint(s) 20, 11, 19, 18, 17, 16, 15, 14, 13, 12

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (7-8)
- All plates are 1.5x3 MT20 unless otherwise indicated.
 - Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION, Do not erect truss backwards.
 - Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard



12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-B007-F02	Truss F211	Truss Type FLOOR GIRDER	Qty 1	Ply 1	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC Job Reference (optional) # 54878
--------------------	---------------	----------------------------	----------	----------	--

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:03 2024 Page 1
ID: gUCksxzC6J7HT2yGkHFINyYiOvf-y25yaDnEv9MK6VJo0dg8mYGRHu?aNmXx56dcx8yBjis

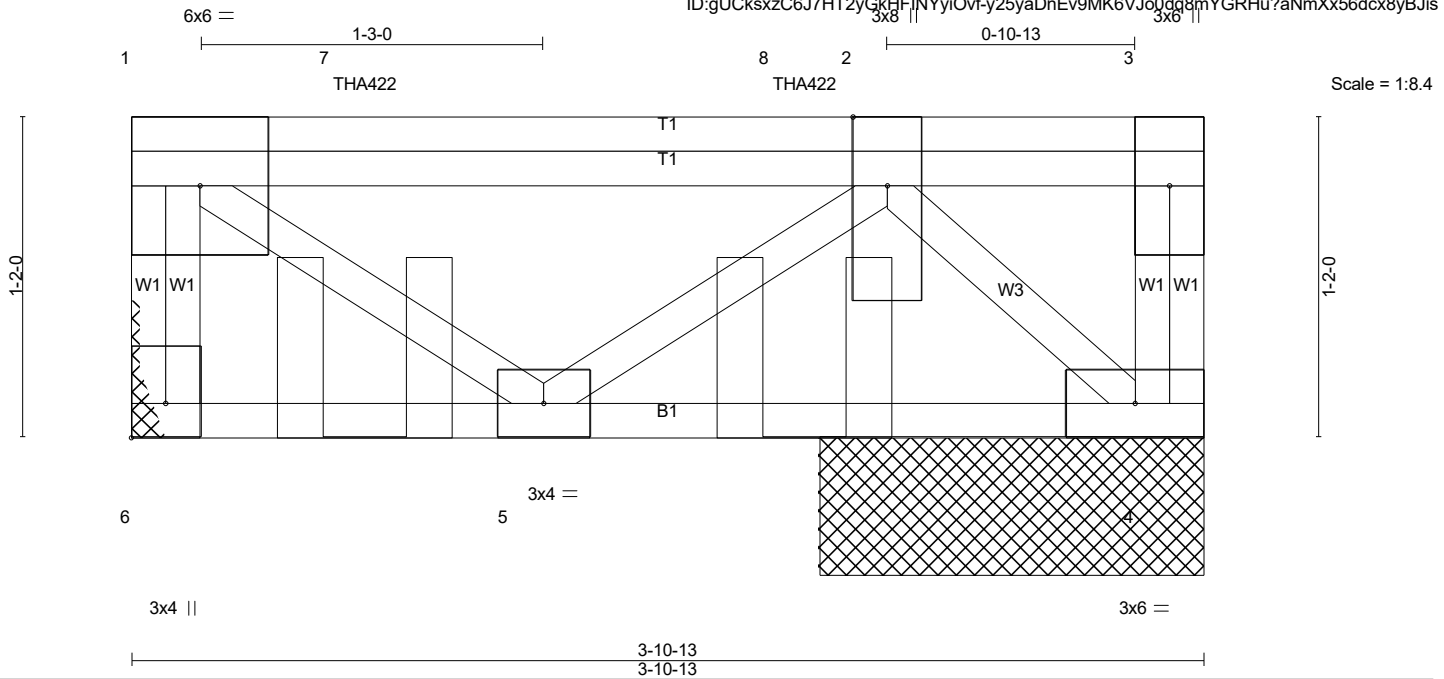


Plate Offsets (X,Y)-- [6:Edge,0-1-8]

LOADING (psf)	SPACING-	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	1-7-3 Plate Grip DOL 1.00	TC 0.77	Vert(LL) -0.00	5	>999	480		MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.25	Vert(CT) -0.01	4-5	>999	360			
BCLL 0.0	Rep Stress Incr NO	WB 0.36	Horz(CT) 0.00	4	n/a	n/a			
BCDL 5.0	Code IRC2021/TPI2014	Matrix-P						Weight: 28 lb	FT = 20%F, 11%E

LUMBER-
TOP CHORD 2x4 SP No.1(flat)
BOT CHORD 2x4 SP No.1(flat)
WEBS 2x4 SP No.3(flat)

BRACING-
TOP CHORD Structural wood sheathing directly applied or 3-10-13 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 6=1059/Mechanical, 4=803/1-4-13 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


TOP CHORD 1-6=-1053/0, 3-4=0/283, 1-7=-599/0, 7-8=-599/0, 2-8=-599/0
BOT CHORD 4-5=0/1127
WEBS 1-5=0/735, 2-5=-671/0, 2-4=-1558/0

NOTES- (6-7)

- 1) Refer to girder(s) for truss to truss connections.
- 2) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
- 3) Use Simpson Strong-Tie THA422 (6-16d Girder, 6-10d Truss) or equivalent spaced at 1-7-3 oc max. starting at 0-10-3 from the left end to 2-5-6 to connect truss(es) F216 (1 ply 2x4 SP) to back face of top chord.
- 4) Fill all nail holes where hanger is in contact with lumber.
- 5) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).
- 6) Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
- 7) Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard

- 1) Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
Uniform Loads (plf)
Vert: 4-6=-8, 1-3=-80
Concentrated Loads (lb)
Vert: 7=-772(B) 8=-769(B)



12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-B007-F02	Truss F212	Truss Type Floor Supported Gable	Qty 1	Ply 1	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC Job Reference (optional) # 54878
--------------------	---------------	-------------------------------------	----------	----------	--

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:05 2024 Page 1
ID:gUCksxzC6J7HT2yGkHFINYjiOvf-uRDl?vpVVRmc1LoSB82scszMypijpr9EZQ6j01yBjIq

0-1-8
H

Scale = 1:38.1

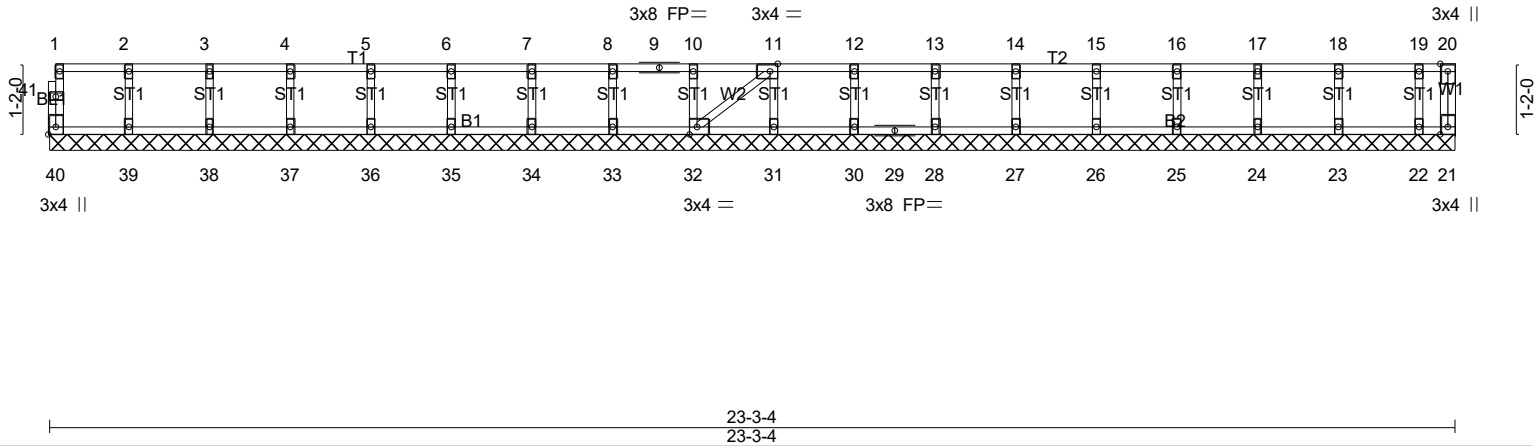


Plate Offsets (X,Y)-- [11:0-1-8,Edge], [32:0-1-8,Edge], [40:Edge,0-1-8]					
LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.06	Vert(LL) n/a - n/a 999	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.01	Vert(CT) n/a - n/a 999		
BCLL 0.0	Rep Stress Incr YES	WB 0.03	Horz(CT) 0.00 21 n/a n/a		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-SH			Weight: 100 lb FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	
OTHERS 2x4 SP No.3(flat)	

REACTIONS. All bearings 23-3-4.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 40, 21, 39, 38, 37, 36, 35, 34, 33, 32, 31, 30, 28, 27, 26, 25, 24, 23, 22

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (7-8)
- All plates are 1.5x3 MT20 unless otherwise indicated.
 - Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION, Do not erect truss backwards.
 - Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard



12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC
24-B007-F02	F213	FLOOR	3	1	# 54878

Run: 8.630 s Jul 12 2024 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:06 2024 Page 1
 ID:gUCksxzC6J7HT2yGkHFINYjiOvf-Mdm4CEp7C4kuzy1NhlNrOBu486wLa0xOn4rHYTyBjip

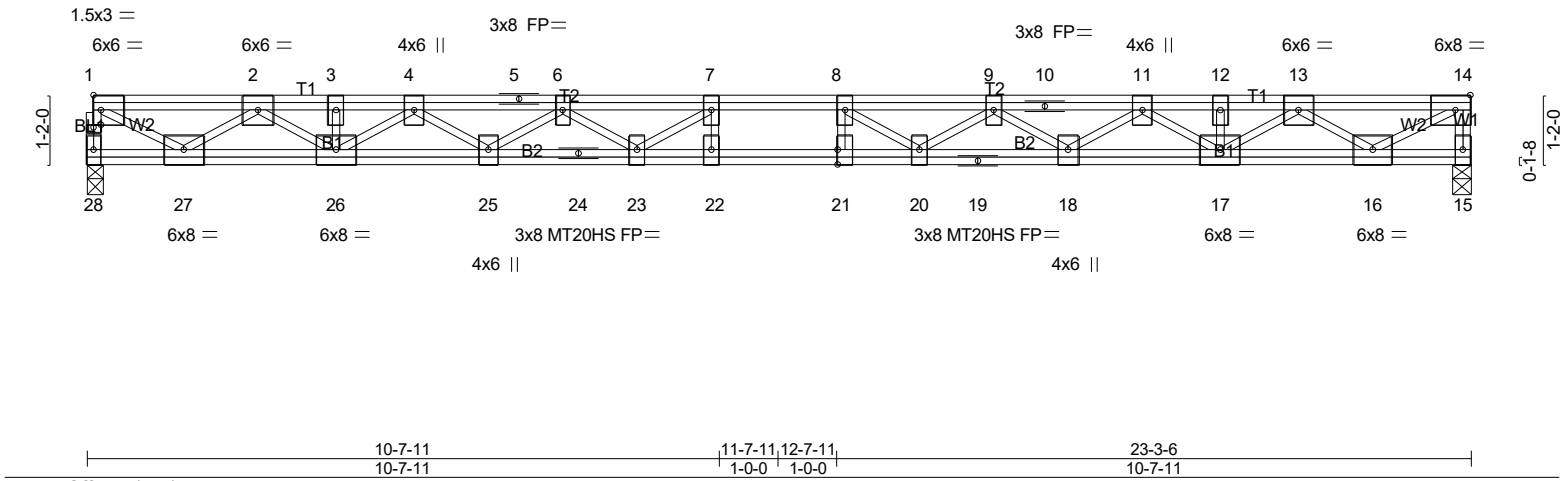



Plate Offsets (X,Y)-- [1:0-1-8,0-0-8], [14:0-3-0,Edge], [21:0-3-0,0-0]					
LOADING (psf)	SPACING- 1-7-3	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.21	Vert(LL) -0.42 21-22 >653 480	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.63	Vert(CT) -0.58 21-22 >475 360	MT20HS	187/143
BCLL 0.0	Rep Stress Incr YES	WB 0.83	Horz(CT) 0.07 15 n/a n/a		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-SH			Weight: 180 lb FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (lb/size) 28=1013/0-3-6 (min. 0-1-8), 15=1013/0-3-8 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 1-28=-996/0, 14-15=-997/0, 1-2=-1501/0, 2-3=-3651/0, 3-4=-3651/0, 4-5=-5118/0, 5-6=-5118/0, 6-7=-5975/0, 7-8=-6248/0, 8-9=-5975/0, 9-10=-5118/0, 10-11=-5118/0, 11-12=-3651/0, 12-13=-3651/0, 13-14=-1485/0
 BOT CHORD 26-27=0/2697, 25-26=0/4521, 24-25=0/5691, 23-24=0/5691, 22-23=0/6248, 21-22=0/6248, 20-21=0/6248, 19-20=0/5691, 18-19=0/5691, 17-18=0/4521, 16-17=0/2697
 WEBS 7-23=-678/135, 6-23=0/527, 6-25=-711/0, 4-25=0/740, 4-26=-1061/0, 2-26=0/1163, 2-27=-1485/0, 1-27=0/1743, 8-20=-678/135, 9-20=0/527, 9-18=-711/0, 11-18=0/740, 11-17=-1061/0, 13-17=0/1163, 13-16=-1503/0, 14-16=0/1735

- NOTES-** (6-7)
- Unbalanced floor live loads have been considered for this design.
 - All plates are MT20 plates unless otherwise indicated.
 - All plates are 3x6 MT20 unless otherwise indicated.
 - Required 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION, Do not erect truss backwards.
 - Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard





12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI I-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC
24-B007-F02	F214	FLOOR	8	1	
					# 54878

Run: 8.630 s Jul 12 2024 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:07 2024 Page 1
 ID:gUCksxzC6J7HT2yGkHFINYiOvf-rpKTQaqlzNsla6cZFTu4xOR7IVJ7JUKX0kbq4wyBjio

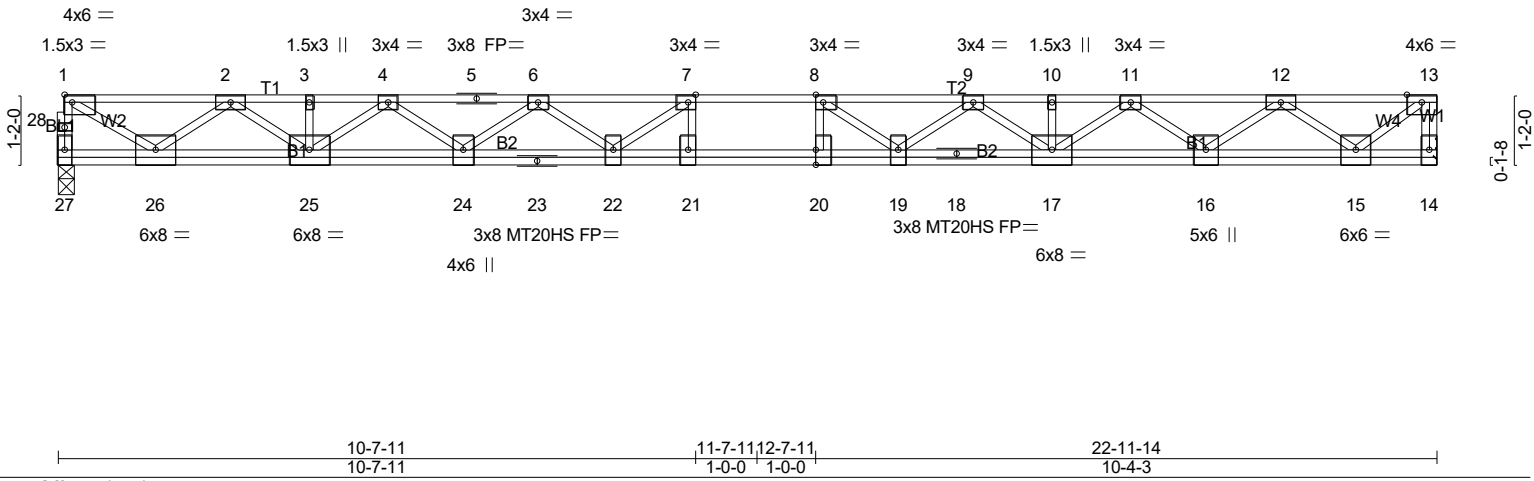

LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCLL	40.0	Plate Grip DOL	1.00	TC	0.76	Vert(LL)	-0.50 20-21 >548 480	MT20	244/190	Weight: 147 lb FT = 20%F, 11%E	
TCDL	10.0	Lumber DOL	1.00	BC	0.40	Vert(CT)	-0.68 20-21 >399 360	MT20HS	187/143		
BCLL	0.0	Rep Stress Incr	YES	WB	0.76	Horz(CT)	0.05 14 n/a n/a				
BCDL	5.0	Code IRC2021/TPI2014		Matrix-SH							

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP SS(flat)
 WEBS 2x4 SP No.3(flat)

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 4-5-11 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 27=995/0-3-6 (min. 0-1-8), 14=1000/Mechanical

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 27-28=-978/0, 1-28=-977/0, 13-14=-984/0, 1-2=-1379/0, 2-3=-3366/0, 3-4=-3366/0, 4-5=-4723/0, 5-6=-4723/0, 6-7=-5476/0, 7-8=-5728/0, 8-9=-5411/0, 9-10=-4584/0, 10-11=-4584/0, 11-12=-3122/0, 12-13=-1131/0
 BOT CHORD 25-26=0/2500, 24-25=0/4178, 23-24=0/5235, 22-23=0/5235, 21-22=0/5728, 20-21=0/5728, 19-20=0/5728, 18-19=0/5131, 17-18=0/5131, 16-17=0/3948, 15-16=0/2272
 WEBS 7-21=-259/279, 8-20=-234/305, 7-22=-675/158, 6-22=0/437, 6-24=-651/0, 4-24=0/691, 4-25=-1013/0, 2-25=0/1081, 2-26=-1423/0, 1-26=0/1588, 8-19=-727/102, 9-19=0/468, 9-17=-682/0, 11-17=0/794, 11-16=-1049/0, 12-16=0/1079, 12-15=-1450/0, 13-15=0/1448

- NOTES-** (7-8)
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are MT20 plates unless otherwise indicated.
 - 3) All plates are 3x6 MT20 unless otherwise indicated.
 - 4) Refer to girder(s) for truss to truss connections.
 - 5) Required 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 6) CAUTION, Do not erect truss backwards.
 - 7) Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - 8) Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard



12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-B007-F02	Truss F215	Truss Type FLOOR GIRDER	Qty 1	Ply 2	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC Job Reference (optional) # 54878
--------------------	---------------	----------------------------	----------	----------	---

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:09 2024 Page 1
ID:gUCksxzC6J7HT2yGkHFINYiOvf-nCSDrGs?V?6TqQmyNuxYOpWV2Jw1nQBqT24x9oyBJim

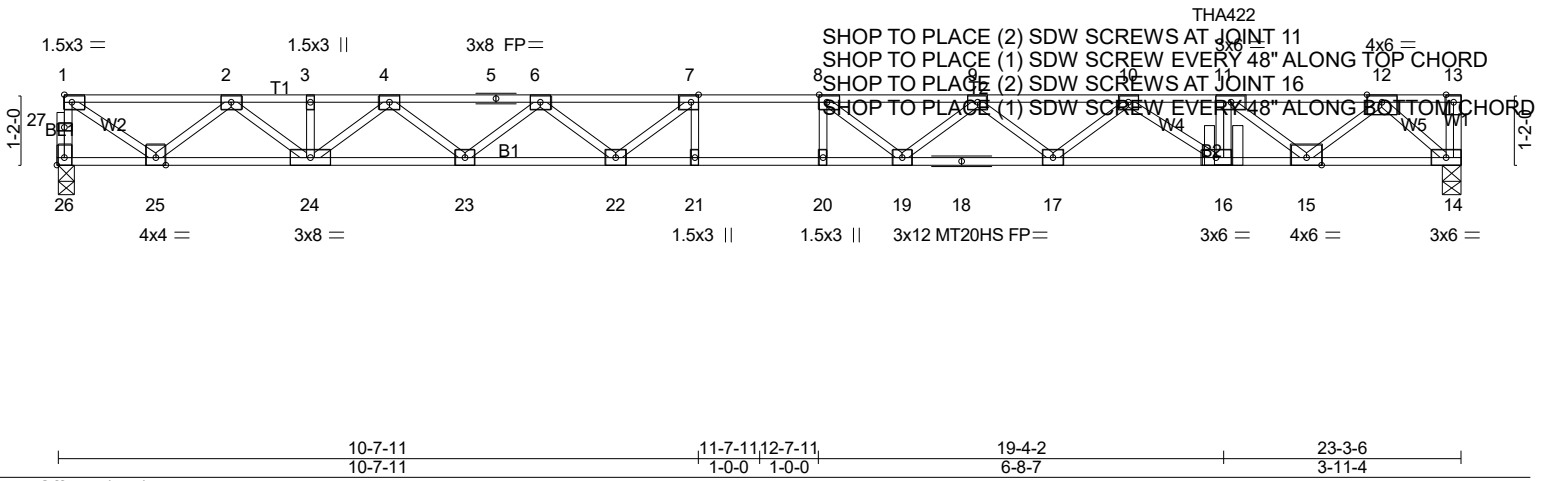



Plate Offsets (X,Y)-- [7:0-1-8,Edge], [8:0-1-8,Edge], [26:Edge,0-1-8]					
LOADING (psf)	SPACING- 1-7-3	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL 1.00	TC 0.62	Vert(LL) -0.45 20 >614 480	MT20	244/190
TCDL 10.0	Lumber DOL 1.00	BC 0.76	Vert(CT) -0.62 19-20 >444 360	MT20HS	187/143
BCLL 0.0	Rep Stress Incr NO	WB 0.60	Horz(CT) 0.08 14 n/a n/a		
BCDL 5.0	Code IRC2021/TPI2014	Matrix-SH			Weight: 236 lb FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP SS(flat) *Except* B2: 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (lb/size) 26=1173/0-3-6 (min. 0-1-8), 14=1843/0-3-8 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 26-27=-1167/0, 1-27=-1165/0, 1-2=-1569/0, 2-3=-3885/0, 3-4=-3885/0, 4-5=-5599/0, 5-6=-5599/0, 6-7=-6755/0, 7-8=-7372/0, 8-9=-7494/0, 9-10=-7137/0, 10-11=-6133/0, 11-12=-4018/0
BOT CHORD 24-25=0/2839, 23-24=0/4880, 22-23=0/6279, 21-22=0/7372, 20-21=0/7372, 19-20=0/7372, 18-19=0/7471, 17-18=0/7471, 16-17=0/6785, 15-16=0/6133, 14-15=0/2068
WEBS 11-16=0/438, 7-21=0/406, 8-20=-378/2, 7-22=-1118/0, 6-22=0/778, 6-23=-885/0, 4-23=0/936, 4-24=-1270/0, 2-24=0/1335, 2-25=-1652/0, 1-25=0/1845, 8-19=-150/601, 9-17=-434/0, 10-17=0/458, 10-16=-782/0, 11-15=-2654/0, 12-15=0/2537, 12-14=-2751/0

- NOTES-** (10-11)
- 1) Fasten trusses together to act as a single unit as per standard industry detail, or loads are to be evenly applied to all plies.
 - 2) Unbalanced floor live loads have been considered for this design.
 - 3) All plates are MT20 plates unless otherwise indicated.
 - 4) All plates are 3x4 MT20 unless otherwise indicated.
 - 5) Required 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 6) CAUTION, Do not erect truss backwards.
 - 7) Use Simpson Strong-Tie THA422 (Single Chord Girder) or equivalent at 19-4-2 from the left end to connect truss(es) F211 (1 ply 2x4 SP) to back face of top chord.
 - 8) Fill all nail holes where hanger is in contact with lumber.
 - 9) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).
 - 10) Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - 11) Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard
 1) Dead + Floor Live (balanced): Lumber Increase=1.00, Plate Increase=1.00
 Uniform Loads (plf)
 Vert: 14-26=-8, 1-13=-80
 Concentrated Loads (lb)
 Vert: 11=-996(B)




12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC
24-B007-F02	F216	Floor	2	1	Job Reference (optional) # 54878

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:10 2024 Page 1
ID:gUCksxzC6J7HT2yGkHFINYiOvf-FO0b2ctdGIFKRAL8wbSnZ13cjCcWv6ziipUhEyBJii

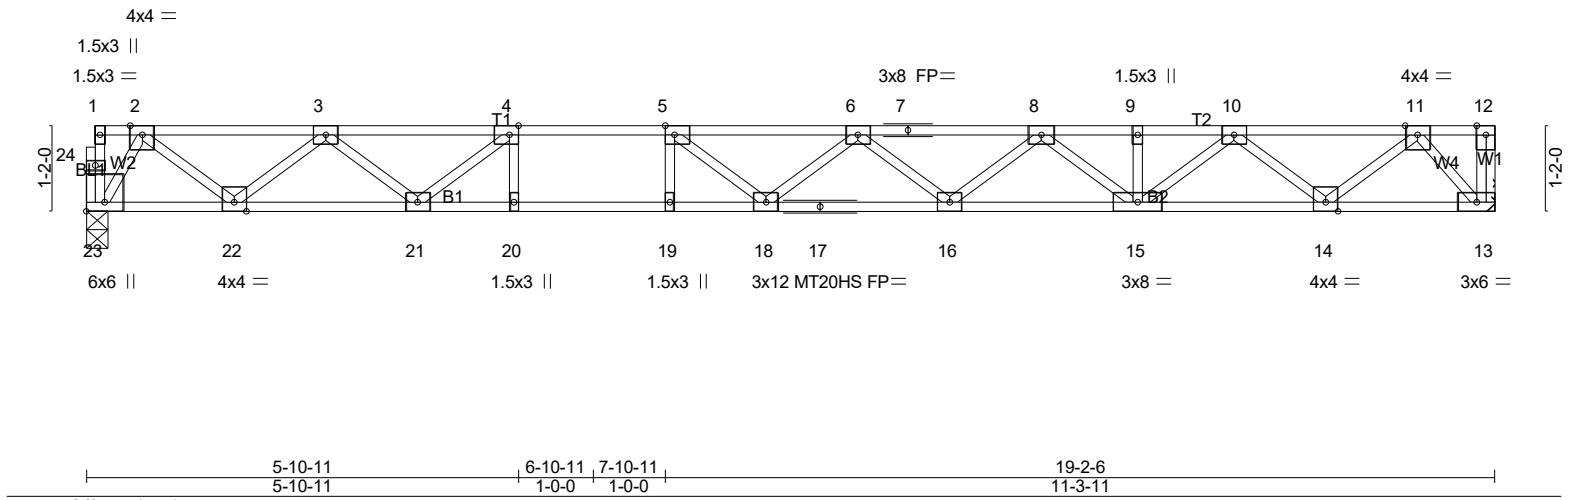

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 40.0	1-7-3	TC 0.88	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.00	BC 0.93	Vert(LL) -0.40 18-19 >575 480	MT20HS	187/143
BCLL 0.0	Lumber DOL 1.00	WB 0.50	Vert(CT) -0.54 18-19 >418 360		
BCDL 5.0	Rep Stress Incr YES	Matrix-SH	Horz(CT) 0.06 13 n/a n/a		
	Code IRC2021/TPI2014			Weight: 97 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP SS(flat) *Except* B2: 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 2-2-0 oc bracing: 19-20.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (lb/size) 23=828/0-3-6 (min. 0-1-8), 13=833/Mechanical

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-3=-1336/0, 3-4=-2669/0, 4-5=-3450/0, 5-6=-3738/0, 6-7=-3556/0, 7-8=-3556/0, 8-9=-2838/0, 9-10=-2838/0, 10-11=-1514/0
 BOT CHORD 22-23=0/534, 21-22=0/2092, 20-21=0/3450, 19-20=0/3450, 18-19=0/3450, 17-18=0/3812, 16-17=0/3812, 15-16=0/3296, 14-15=0/2268, 13-14=0/736
 WEBS 4-20=0/378, 5-19=-352/0, 4-21=-1051/0, 3-21=0/751, 3-22=-984/0, 2-22=0/1044, 2-23=-1025/0, 5-18=-125/535, 6-16=-333/0, 8-16=0/339, 8-15=-584/0, 10-15=0/728, 10-14=-982/0, 11-14=0/1012, 11-13=-1104/0

- NOTES-** (7-8)
- Unbalanced floor live loads have been considered for this design.
 - All plates are MT20 plates unless otherwise indicated.
 - All plates are 3x4 MT20 unless otherwise indicated.
 - Refer to girder(s) for truss to truss connections.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION, Do not erect truss backwards.
 - Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard




12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC
24-B007-F02	F217	Floor	4	1	Job Reference (optional) # 54878

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:11 2024 Page 1
ID:gUCksxzC6J7HT2yGkHFINYjiOvf-jbazGytG1cNB3jwLUIz05Ecmj7YKFMD7xLZ1DhyBjk

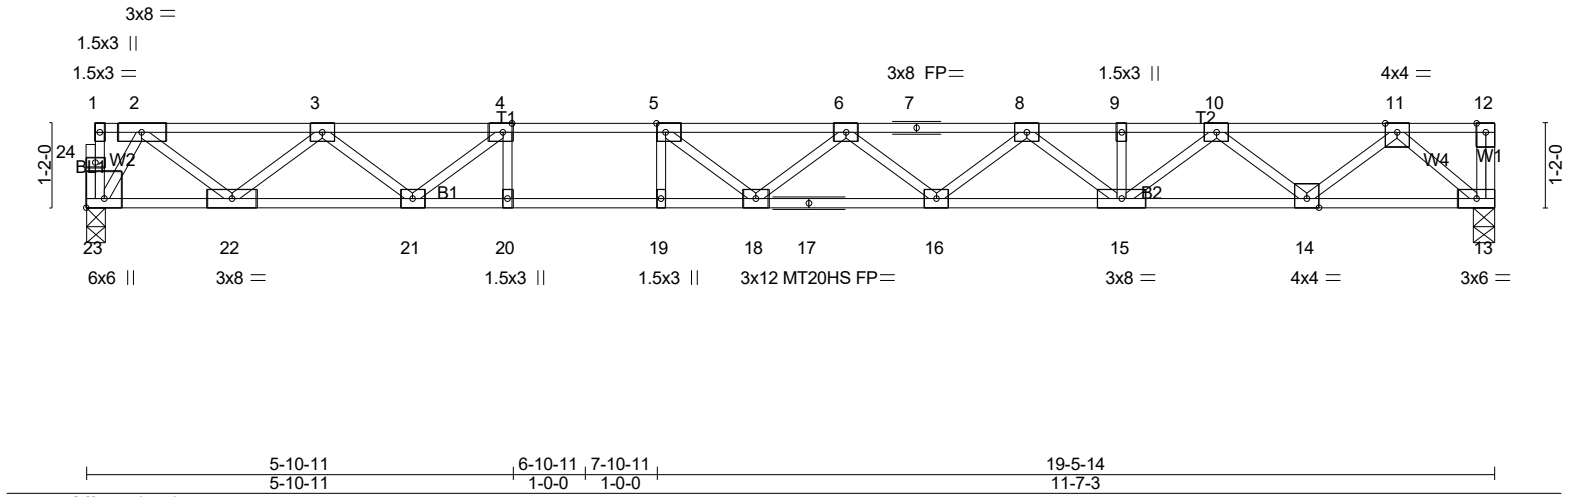

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 40.0	1-7-3	TC 0.93	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.00	BC 0.96	Vert(LL) -0.42 18-19 >550 480	MT20HS	187/143
BCLL 0.0	Lumber DOL 1.00	WB 0.51	Vert(CT) -0.58 18-19 >400 360		
BCDL 5.0	Rep Stress Incr YES	Matrix-SH	Horz(CT) 0.07 13 n/a n/a		
	Code IRC2021/TPI2014			Weight: 98 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP SS(flat) *Except* B2: 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 2-2-0 oc bracing: 19-20.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (lb/size) 23=841/0-3-6 (min. 0-1-8), 13=846/0-3-8 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-1359/0, 3-4=-2723/0, 4-5=-3533/0, 5-6=-3850/0, 6-7=-3699/0, 7-8=-3699/0, 8-9=-3013/0, 9-10=-3013/0, 10-11=-1720/0
BOT CHORD 22-23=0/543, 21-22=0/2129, 20-21=0/3533, 19-20=0/3533, 18-19=0/3533, 17-18=0/3941, 16-17=0/3941, 15-16=0/3453, 14-15=0/2459, 13-14=0/956
WEBS 4-20=0/393, 5-19=-366/0, 4-21=-1085/0, 3-21=0/773, 3-22=-1001/0, 2-22=0/1063, 2-23=-1042/0, 5-18=-111/569, 6-16=-315/0, 8-16=0/320, 8-15=-563/0, 10-15=0/707, 10-14=-962/0, 11-14=0/995, 11-13=-1255/0

- NOTES-** (6-7)
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are MT20 plates unless otherwise indicated.
 - 3) All plates are 3x4 MT20 unless otherwise indicated.
 - 4) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 5) CAUTION, Do not erect truss backwards.
 - 6) Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - 7) Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard





12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC
24-B007-F02	F218	Floor	13	1	
					# 54878

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:11 2024 Page 1
 ID:gUCksxzC6J7HT2yGkHFINYiOvf-jbazGytG1cNB3jwLUlz05EcwC7eDFO?7xLZ1DhyBjk

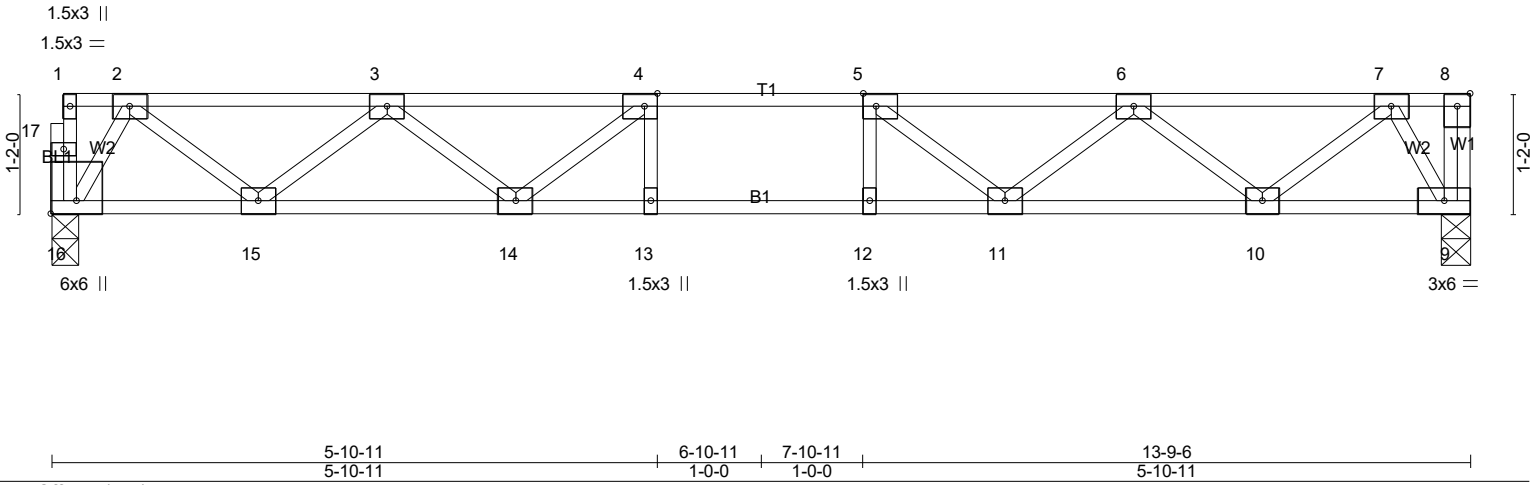

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 40.0	1-7-3	TC 0.26	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.00	BC 0.52	Vert(LL) -0.09 11-12 >999 480		
BCLL 0.0	Lumber DOL 1.00	WB 0.33	Vert(CT) -0.12 11-12 >999 360		
BCDL 5.0	Rep Stress Incr YES	Matrix-SH	Horz(CT) 0.03 9 n/a n/a		
	Code IRC2021/TPI2014			Weight: 70 lb	FT = 20%F, 11%E

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	

REACTIONS. (lb/size) 16=590/0-3-6 (min. 0-1-8), 9=595/0-3-8 (min. 0-1-8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-3=-906/0, 3-4=-1665/0, 4-5=-1910/0, 5-6=-1665/0, 6-7=-906/0
 BOT CHORD 15-16=0/376, 14-15=0/1413, 13-14=0/1910, 12-13=0/1910, 11-12=0/1910, 10-11=0/1413, 9-10=0/376
 WEBS 4-14=-428/0, 3-14=0/355, 3-15=-660/0, 2-15=0/690, 2-16=-720/0, 5-11=-428/0, 6-11=0/355, 6-10=-660/0, 7-10=0/690, 7-9=-717/0

- NOTES-** (5-6)
- 1) Unbalanced floor live loads have been considered for this design.
 - 2) All plates are 3x4 MT20 unless otherwise indicated.
 - 3) Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - 4) CAUTION, Do not erect truss backwards.
 - 5) Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - 6) Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard



12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC
24-B007-F02	F219	Floor Supported Gable	1	1	Job Reference (optional) # 54878

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:12 2024 Page 1
 ID:gUCksxzC6J7HT2yGkHFINYiOvf-Bn8MTluowV2htVX20UFes891W6M_wuGA?lb7yBjJ

0₁-8

Scale = 1:22.4

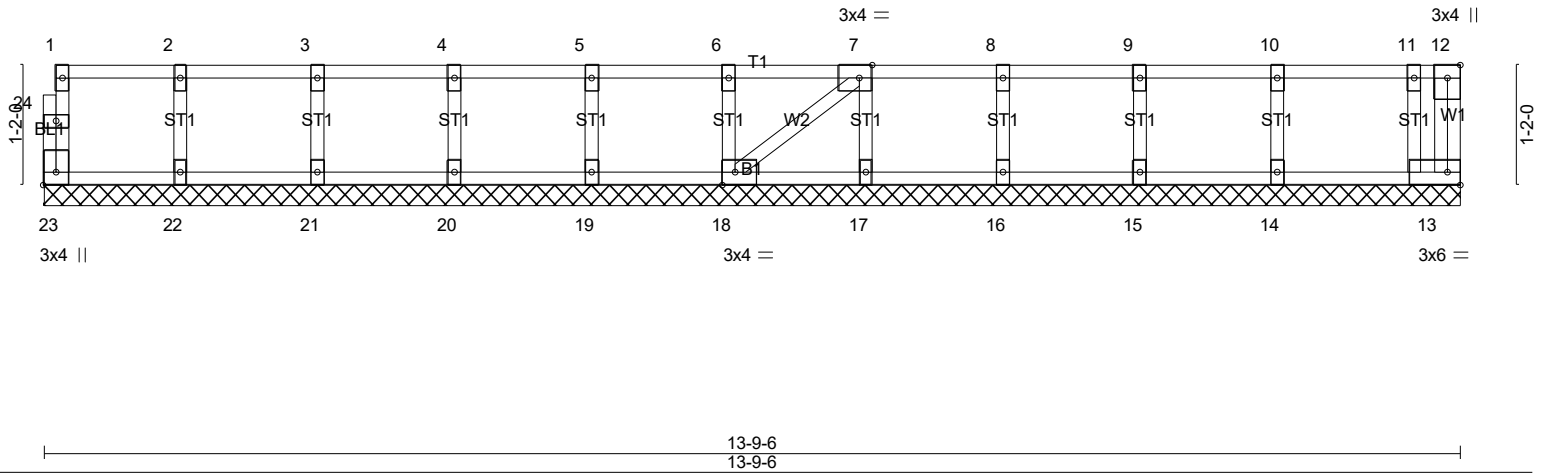


Plate Offsets (X,Y)-- [7:0-1-8,Edge], [18:0-1-8,Edge], [23:Edge,0-1-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	Plate Grip DOL	1.00	TC 0.06	Vert(LL)	n/a	-	n/a	MT20	244/190
TCDL 10.0	Lumber DOL	1.00	BC 0.01	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Rep Stress Incr	YES	WB 0.03	Horz(CT)	0.00	13	n/a		
BCDL 5.0	Code IRC2021/TPI2014		Matrix-SH						
								Weight: 62 lb	FT = 20%F, 11%E

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP No.1(flat)
 WEBS 2x4 SP No.3(flat)
 OTHERS 2x4 SP No.3(flat)


BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 13-9-6.
 (lb) - Max Grav All reactions 250 lb or less at joint(s) 23, 13, 22, 21, 20, 19, 18, 17, 16, 15, 14

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (7-8)
- All plates are 1.5x3 MT20 unless otherwise indicated.
 - Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - CAUTION, Do not erect truss backwards.
 - Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard



12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job	Truss	Truss Type	Qty	Ply	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC
24-B007-F02	F220	Floor	12	1	
					# 54878

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:13 2024 Page 1
 ID:gUCksxzC6J7HT2yGkHFINYyiOvf-fzhkgevWZDdvl14jcz?UAfhECwFgjGwQOf28lZyBji

0-3-10 1-3-0

2-0-0

0-3-10

Scale = 1:30.0

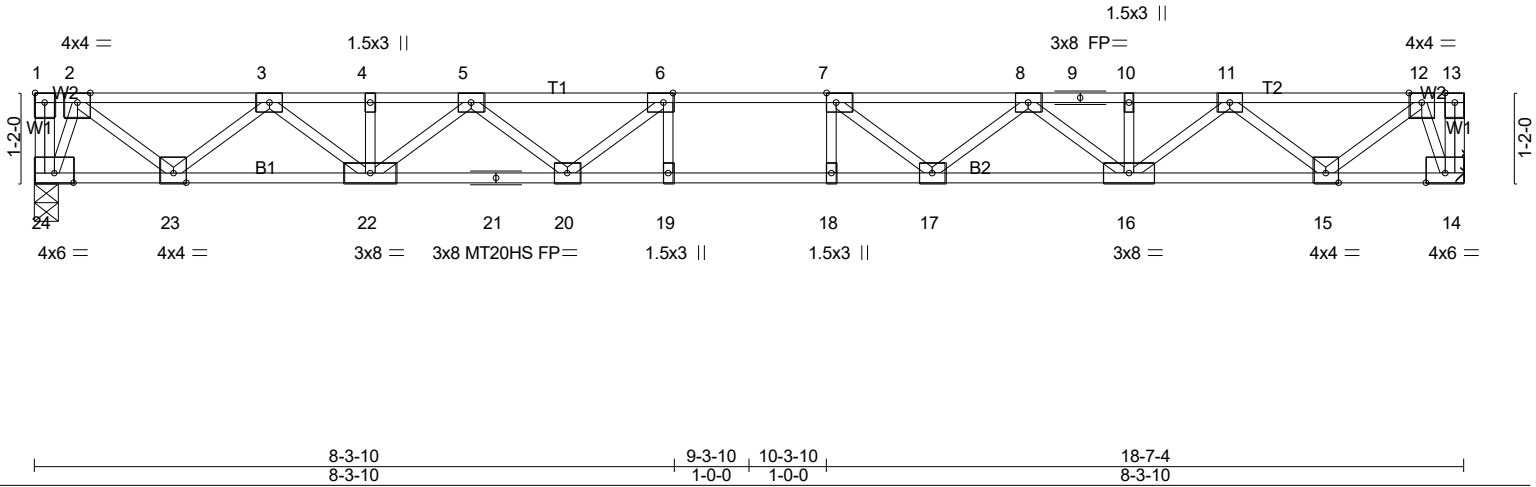


Plate Offsets (X,Y)-- [1:Edge,0-1-8], [6:0-1-8,Edge], [7:0-1-8,Edge]

LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 40.0	1-7-3	TC 0.42	in (loc) l/defl L/d	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.00	BC 0.84	Vert(LL) -0.26 18-19 >832 480	MT20HS	187/143
BCLL 0.0	Lumber DOL 1.00	WB 0.49	Vert(CT) -0.37 18-19 >603 360		
BCDL 5.0	Rep Stress Incr YES	Matrix-SH	Horz(CT) 0.06 14 n/a n/a		
	Code IRC2021/TPI2014				Weight: 97 lb FT = 20%F, 11%E

LUMBER-
 TOP CHORD 2x4 SP No.1(flat)
 BOT CHORD 2x4 SP No.1(flat)
 WEBS 2x4 SP No.3(flat)

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (lb/size) 24=807/0-3-8 (min. 0-1-8), 14=807/Mechanical

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-3=-1153/0, 3-4=-2517/0, 4-5=-2517/0, 5-6=-3276/0, 6-7=-3528/0, 7-8=-3276/0, 8-9=-2517/0, 9-10=-2517/0, 10-11=-2517/0, 11-12=-1153/0
 BOT CHORD 23-24=0/357, 22-23=0/1927, 21-22=0/3018, 20-21=0/3018, 19-20=0/3528, 18-19=0/3528, 17-18=0/3528, 16-17=0/3018, 15-16=0/1927, 14-15=0/357
 WEBS 6-20=-540/18, 5-20=0/429, 5-22=-640/0, 3-22=0/753, 3-23=-1007/0, 2-23=0/1036, 2-24=-942/0, 7-17=-540/18, 8-17=0/429, 8-16=-640/0, 11-16=0/753, 11-15=-1007/0, 12-15=0/1036, 12-14=-942/0

- NOTES-** (6-7)
- Unbalanced floor live loads have been considered for this design.
 - All plates are MT20 plates unless otherwise indicated.
 - All plates are 3x4 MT20 unless otherwise indicated.
 - Refer to girder(s) for truss to truss connections.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard



12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 *Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.

Job 24-B007-F02	Truss F221	Truss Type Floor Supported Gable	Qty 1	Ply 1	LOT 0.0012 CAMPBELL RIDGE 329 ALDEN WAY ANGIER, NC Job Reference (optional) # 54878
--------------------	---------------	-------------------------------------	----------	----------	--

Run: 8.430 s Feb 12 2021 Print: 8.630 s Jul 12 2024 MiTek Industries, Inc. Sat Dec 7 16:19:14 2024 Page 1
ID:gUCksxzC6J7HT2yGkHFINYyiOvf-7AF6u_w8JXImwBew9RWjItEVWkKowSqNzDjJniq0yBjH

Scale = 1:29.9

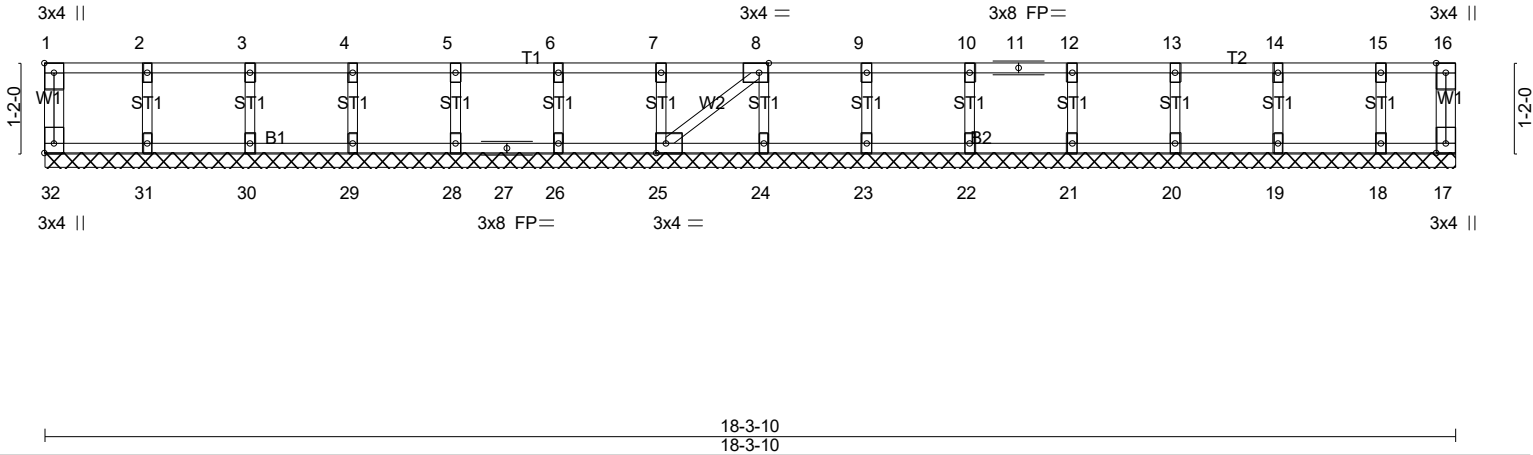


Plate Offsets (X,Y)-- [1:Edge,0-1-8], [8:0-1-8,Edge], [25:0-1-8,Edge], [32:Edge,0-1-8]

LOADING (psf)	SPACING-	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 40.0	2-0-0	TC 0.06	Vert(LL)	n/a	-	n/a	MT20	244/190
TCDL 10.0	Plate Grip DOL 1.00	BC 0.01	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Lumber DOL 1.00	WB 0.03	Horz(CT)	-0.00	25	n/a		
BCDL 5.0	Rep Stress Incr YES	Matrix-SH					Weight: 80 lb	FT = 20%F, 11%E
	Code IRC2021/TPI2014							

LUMBER-	BRACING-
TOP CHORD 2x4 SP No.1(flat)	TOP CHORD Structural wood sheathing directly applied or 10-0-0 oc purlins, except end verticals.
BOT CHORD 2x4 SP No.1(flat)	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SP No.3(flat)	
OTHERS 2x4 SP No.3(flat)	

REACTIONS. All bearings 18-3-10.
(lb) - Max Grav All reactions 250 lb or less at joint(s) 32, 17, 31, 30, 29, 28, 26, 25, 24, 23, 22, 21, 20, 19, 18

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-** (6-7)
- All plates are 1.5x3 MT20 unless otherwise indicated.
 - Gable requires continuous bottom chord bearing.
 - Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - Gable studs spaced at 1-4-0 oc.
 - Recommend 2x6 strongbacks, on edge, spaced at 10-0-0 oc and fastened to each truss with 3-10d (0.131" X 3") nails. Strongbacks to be attached to walls at their outer ends or restrained by other means.
 - Graphical web bracing representation does not depict the size, type or the orientation of the brace on the web. Symbol only indicates that the member must be braced.
 - Bearing symbols are only graphical representations of a possible bearing condition. Bearing symbols are not considered in the structural design of the truss to support the loads indicated.

LOAD CASE(S) Standard



12/7/2024

Warning!—Verify design parameters and read notes before use. This design is based only upon parameters shown, and is for an individual building component to be installed and loaded vertically. Applicability of design parameters and proper incorporation of component is responsibility of building designer – not truss designer or truss engineer. Bracing shown is for lateral support of individual web members only. Additional temporary bracing to ensure stability during construction is the responsibility of the erector. Additional permanent bracing of the overall structure is the responsibility of the building designer. For general guidance regarding fabrication, quality control, storage, delivery, erection and bracing, consult ANSI/TPI 1 *National Design Standard for Metal Plate Connected Wood Truss Construction* and BCSI 1-03 Guide to *Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses* from Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53719.