


Highland Grove 4-Bedroom Septic Proposal Lot #22

Windy Farm Drive

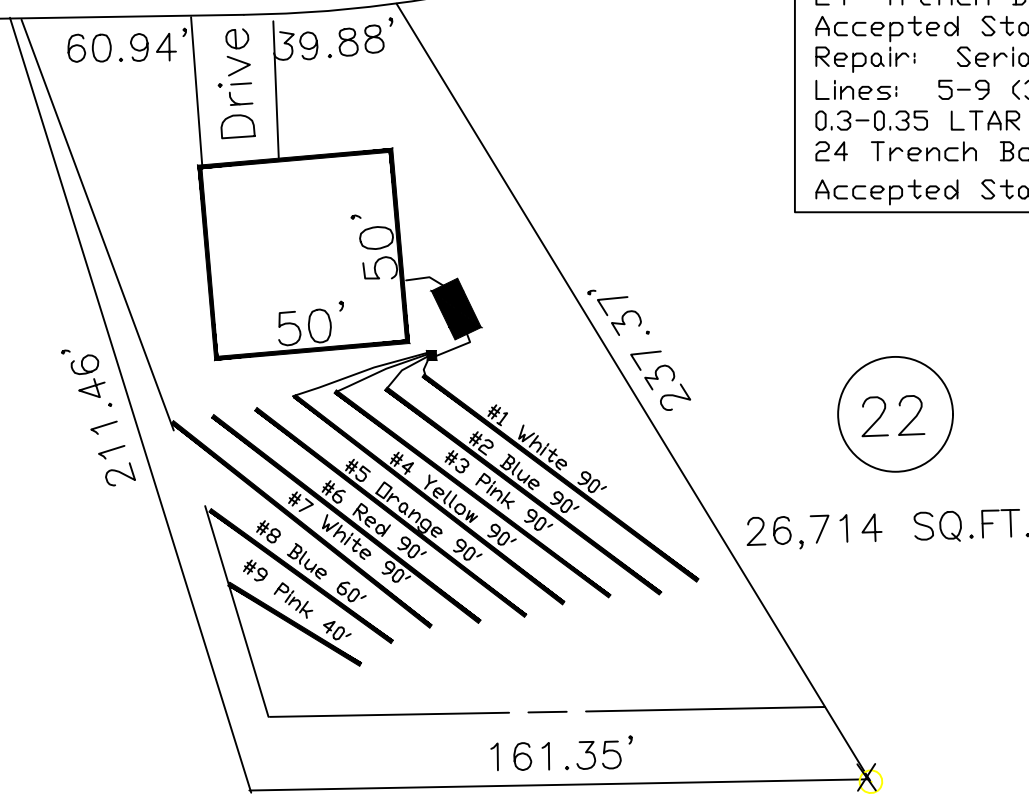

System: Gravity to D-Box
 Lines: 1-4 (360')
 0.3-0.35 LTAR
 24" Trench Bottom
 Accepted Status System
 Repair: Serial Dist.
 Lines: 5-9 (370')
 0.3-0.35 LTAR
 24" Trench Bottom
 Accepted Status System

This drawing represents a preliminary septic plan made prior to final construction activities. A revised plan may need to be reworked at time of permitting.

*If plumbing is not sufficient a seperate pump and tank may be required.

GRAPHIC SCALE
 1" = 50'



Adams
 Soil Consulting
 919-414-6761
 Job #561