


Highland Grove 3-Bedroom Septic Proposal Lot #21

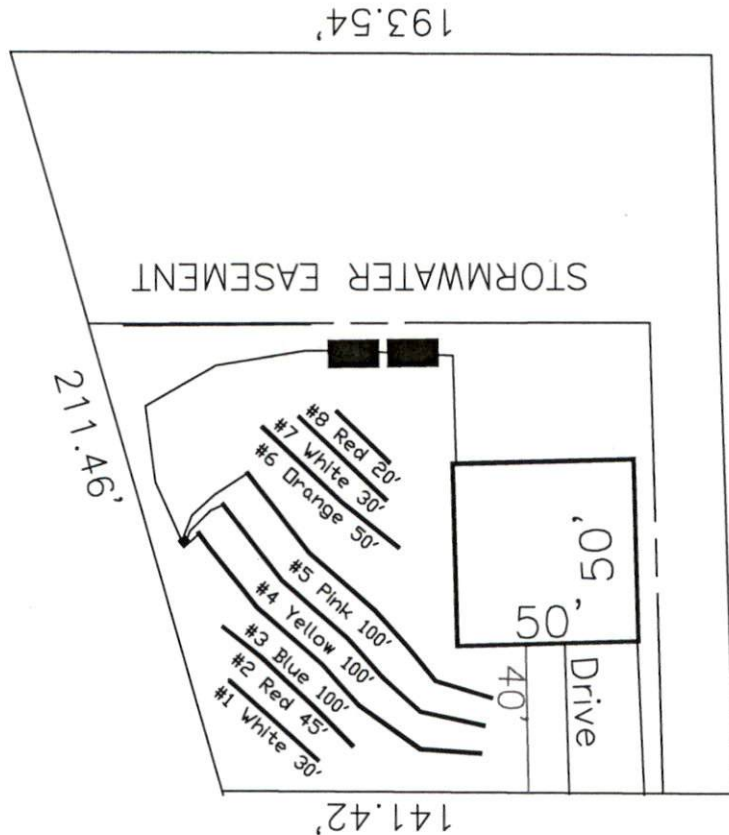

21

Windy Farm Drive

System: Pump to D-Box
 Lines: 3-5 (300')
 0.3 LTAR
 24" Trench Bottom
 Accepted Status System
 Repair: Serial Dist.
 Lines: 6-10 (400')
 0.3 LTAR
 24" Trench Bottom
 T&J Panel - 50% Reduction

This drawing represents a preliminary septic plan made prior to final construction activities. A revised plan may need to be reworked at time of permitting.

GRAPHIC SCALE
 1" = 50'



Adams
 Soil Consulting
 919-414-6761
 Job #561