PINEHURST -A, B, C

PLAN ID: 2234 (SLAB) - LEFT HAND - NORTH CAROLINA

DATE:	REVISION:
06/09/2017	INITIAL RELEASE OF PLANS
07/21/2017	CLIENT REVISIONS
08/15/2017	REVISED PORCHES TO DROPPED SOFFIT
08.28.17	SPLIT SETS INTO SLAB AND BASEMENT VERSIONS
10/10/2017	CLIENT REVISIONS
10/20/2017	REVISED ROOF PITCH AT FRONT GABLE AT ELEVATIONS 'A' AND 'B'
11/01/2017	REMOVED PORCH RAILING FROM ELEVATION 'C' REMOVED DROPPED HEADER AT DINING
02/07/2018	ELECTRICAL REVISIONS
05/03/2018	ADDED EXTENDED PORCH OPTION
06/11/2018	CLIENT REVISIONS
11/14/2018	CLIENT REVISIONS
01/09/2019	REVISED CODE REFERENCES
06/18/2019	CLIENT REVISIONS
12/13/2019	CLIENT REVISIONS
02/28/2020	CLIENT REVISIONS

SHEE

	REVIEWERS STAMP LOCATION
T INDEX:	
RCHITECTURALS - COVERSHEET	
RCHITECTURALS - QUICK VIEW	
RCHITECTURALS - ELEVATIONS A	
RCHITECTURALS - ELEVATIONS B	
RCHITECTURALS - ELEVATIONS C	
RCHITECTURALS - FLOOR PLANS A	
RCHITECTURALS - FLOOR PLANS B	
RCHITECTURALS - FLOOR PLANS C	
LECTRICAL - FLOOR PLANS	

MODEL 'PINEHURST' SQUARE FOOTAGES				
AREA		ELEV 'B'	,	
Ist FLOOR		896 SF		
2nd FLOOR		1311 SF		
TOTAL LIVING		2207 SF		
GARAGE		370 SF		
 PORCH		68 SF		

MORGAN NORTH LOT 71 101 SIMPLY COUNTRY LANE LILLINGTON, NC 27546 PIN 0651-03-5475.000



PINEHURST (SLAB)

COVERSHEET

PLAN REV DATE

N.C ATTIC VENT CALCULATION FOR MODEL 'PINEHURST': I:150 RATIO.

ROOF AREA Is = 1344 SE

EXCEPTIONS:

1. EXCLOSED ATTIC/RAFTER SPACES REQUIRING LESS THAN
15Q FT OF VENTILATION MAY BE VENTED WITH CONTINUOUS
SOFFIT VENTILATION ONLY.

2. ENCLOSED ATTIC/RAFTER SPACES OVER UNCONDITIONED SPACE MAY BE VENTED WITH CONTINUOUS SOFFIT VENT ONLY

GENERAL CORRECTOR SHALL ENERT THE HET FIRE PER FIRE PARTICULAR CONTROLLED BY OWNER SHALL CONTROLLED BY OWNER SHELL FOR SHALL CONTROLLED BY OWNER SHELL FOR SHALL CONTROLLED BY OWNER SHELL FOR SHELL FOR SHALL CONTROLLED FOR SHELL FOR SHEL

N' THE BUILDING OFFICIAL.
LL CYPELAP FRAMED ROOF AREAS SHALL HAVE
PENNISS BETWEEN THE ADJACENT ATTICS IN THE ROOF
HEATHING IGS ALLOWED BY THE STRICTURAL ENGINEER)
O ALLOW PASSAGE AND ATTIC VENTILATION
EINEEN THE TWO OR ISOLATED ATTIC SPACES SHALL
E VENTED INJECTED/DENTLY TO GOE RESURFENIS.

SE VENTED INDEPENDENTLY TO CEO REGUIREMENTS.
FER ENFEL OFFER AT ALL CANTILLEVERED FLOORS.
CANTILLEVERED ARCHITECTIRAL POP-CUTS, AND ANY DOLORIE
PRANIE PRO ECTIONS THAT ARE SPEPARATED FROM THE
CRITINES CALCILLATIONS SHORN ABOVE PROVIDE A
THE CALCILLATIONS SHORN ABOVE PROVIDE A
THE CANTINUOUS 2" CORROSION RESISTANT SOFFIT VENT AT
ADDRESIDE OF FRANED ELEMENT.

ALL ROOF DRAINAGE SHALL BE PIPED TO STREET OR APPROVED DRAINAGE FACILITY. ASHED LINES INDIGATE WALL BELOW LOCATE GUTTER AND DOWNSPOUTS PER BUILDER PITCHED ROOFS AS NOTED.

TRUSS MANUFACTURER SHALL SUBMIT STRUCTURAL CALCS AND SHOP DRAWING TO THE BUILDER'S GENERAL CONTRACTOR AND BUILDING DEPARTMENT

I SQUARE INCH VENT FOR EVERY 150 SQUARE INCHES OF CEILING 1944 5Q, N. = 1 5Q, FT.

BLD6, CEILING (9F) X 144 = BLD6 (5Q, IN.)

BLD6, (5Q, IN.) / BO = 5Q, II. OF VENT REQUIRED

9Q, IN. OF VENT REQUIRED / 2 = 50% AT HIGH & 50% AT LOW.

545,12 SQ, IN, OF VENT AT HIGH & 645,12 SQ, IN, OF VENT AT LOW REQUIRED.

1344 SQ, FT, X |44 = |43536 SQ, IN, |43536 SQ, IN, / 150 = |240,24 SQ, IN, OF VENT REQ'D |240,24 SQ, IN, / 2 = 645,12 SQ, IN

N.C ATTIC VENT CALCULATION FOR MODEL 'PINEHURST': I:300 RATIO

S AN ALTERNATE TO THE I/ISO RATIO LISTED ABOVE, HE NET FREE CROSS-VENTILATION AREA MAY BE REDUC O I/SOO MHEN A CLASS I OR II VAPOR RETARDER IS IN N THE IVARM - IN - NINTER SIDE OF THE CEILING.

97 THE BUILDING OFFICIAL.

LL, OVERLAP FRAMED ROOF AREAS SHALL HAVE
PRENNED BETWEEN THE ADJACENT ATTICS IN THE ROOF
HEATHING (NE ALLOWED BY THE STRICTIRAL ISHNEER!)

O ALLOW PASSAGE AND ATTIC VENTILATION.
BETWEEN THE TWO OR ISOLATED ATTIC SPACES SHALL
BE VENTED INDEPENDENTLY TO OBC REGUIREMENTS.

FER DEVELOPER, AT ALL CANTILEVERED FLOORS, CANTILEVERED ARCHITECTURAL POP-OUTS, AND ANY DOUBLE RRAMING PRO-ECTIONS THAT ARE SEPARATED FROM THE VENTING CALCULATIONS SHOWN ABOVE, PROVIDE A CONTINUOUS 2° CORROSION RESISTANT SOFFIT VENT AT ANDERSIDE OF FRANCED ELEVENT.

(PER NORG SECTION RB06.2)

I SQUARE INCH VENT FOR EVERY 300 SQUARE INCHES OF CEILING *144 SQ. IN. = 1 SQ. FT. BUDG. (CEILING SF) X 144 = BLDG (SQ. IN.) BLDG. (SQ. IN.) 7 SOO = SQ. IN. OF VENT REQUIRED SQ. IN. OF VENT REQUIRED / 2 = 50% AT HIGH & 50% AT LOW.

ROOF AREA I: = 1344 SF

1344 SQ, FT, X 144 = 143536 SQ, IN, 143536 SQ, IN, / 300 = 645,12 SQ, IN, OF VENT REQ'D 645,12 SQ, IN, / 2 = 322,56 SQ, IN

322.56 SQ. IN. OF VENT AT HIGH & 322.56 SQ. IN. OF VENT AT LOW REQUIRE

OTES:

GRADE CONDITIONS MAY VARY FOR INDIVIDUAL SITE FROM THAT SHOWN BUILDER SHALL VERIFY AND COORDINATE PER ACTUAL SITE CONDITIONS

- WINDOW HEAD HEIGHTS: IST FLOOR = 6'-8" U.N.O. ON ELEVATIONS. 2ND FLOOR = 7'-0" U.N.O. ON ELEVATIONS.

ROOFING: PITCHED SHINGLES PER DEVELOPER.

WINDOWS: MANUFACTURER PER DEVELOPER. DIVIDED LITES AS SHOWN ON THE EXTERIOR ELEVATIONS ENTRY DOOR: AS SELECTED BY DEVELOPER,

GARAGE DOORS: AS SELECTED BY DEVELOPER, RAISED PANEL AS SHOWN.

ALL EXTERIOR MATERIALS TO BE INSTALLED PER MANUFACTURER'S WRITTEN INSTRUCTIONS.

PROTECTION AGAINST DECAY:
(ALL PORTIONS OF A PORCH, SCREEN PORCH OR DECK FROM THE BOTTOM OF
THE HEADER DOWN, INCLUDING POST, RAILS, PICKETS, STEPS AND FLOOR STRUCTURE.)

INSULATION: PER TABLE NIIO2.1.2.

EXTERIOR WALLS:
CEILING WITH ATTIC ABOVE:
R-36 BATTS MINIMUM. VERIFY FLOOR OVER GARAGE: R-I9 BATTS MINIMUM, VERIFY
ATTIC KNEEWALL: R-I9 BATTS MINIMUM, VERIFY

CRAWL SPACE FLOORING: R-I9 BATTS MINIMUM, VERIFI EY NOTES:

MASONRY:

ADHERED STONE VENEER AS SELECTED BY DEVELOPER. HEIGHT AS NOTED

MASONRY FULL BRICK AS SELECTED BY DEVELOPER. HEIGHT AS NOTED.

MASONRY FULL STONE AS SELECTED BY DEVELOPER, HEIGHT AS NOTED.

8" SOLDIER COURSE. ROWLOCK COURSE

TYPICALS:

T CORROSION RESISTANT SCREEN LOUVERED VENTS, SIZE AS NOTED.

CODE APPROVED TERMINATION CHIMNEY CAP. CORROSION RESISTANT ROOF TO WALL FLASHING. CODE COMPLIANT FLASHING PER NCRC R905.2.6.3

O STANDING SEAM METAL ROOF, INSTALL PER MANUFCATURER'S WRITTEN INSTRUCTIONS.

DECORATIVE WROUGHT IRON, SEE DETAILS.

VINTL SHAKE SIDING PER DEVELOPER WITH VINYL CORNER TRIM PER DEVELOPER.
(AT SPECIFIED LOCATIONS:
FIBER CEMENT SHAKE SIDING PER DEVELOPER W IX4 CORNER TRIM BOARD.)

VINYL LAP SIDING PER DEVELOPER WITH VINYL CORNER TRIM PER DEVELOPER.

(AT SPECIFIED LOCATIONS: FIBER CEMENT LAP SIDING PER DEVELOPER W/ IX4 CORNER TRIM BOARD.) VINYL WAVY SIDING PER DEVELOPER WITH VINYL CORNER TRIM PER DEVELOPER.

(AT SPECIFIED LOCATIONS: FIBER CEMENT WAYY SIDING PER DEVELOPER W IX4 CORNER TRIM BOARD.)

VINYL BOARD AND BATT SIDING PER DEVELOPER WITH VINYL CORNER TRIM PER DEVELOPER. (AT SPECIFIED LOCATIONS: FIBER CEMENT PANEL SIDING W/ IX3 BATTS AT 12" O.C. PER DEVELOPER W/ IX4 CORNER TRIM BOARD.)

VINYL TRIM SIZE AS NOTED


(AT SPECIFIC LOCATIONS: IX FIBER CEMENT TRIM OR EQUAL, U.N.O. SIZE AS NOTED

FYPON SHUTTERS, TYPE AS SHOWN. SIZE AS NOTED. (AT SPECIFIC LOCATIONS: FALSE VINYL SHUTTERS, TYPE AS SHOWN. SIZE AS NOTED.)

ALL MINDOMS MHOSE OPENING IS LESS THAN 24" ABOVE THE FINISH FLOOR AND WHOSE OPENING IS GREATER THAN 12" ABOVE THE OUTSIDE WALKING SURFACE MIST HAVE WINDOM OPENING LIMITING DEVICES COMPLYING WITH THE NCRC SECTION R312.21 AND R312.22.2.


AT SINGLE FAMILY DETACHED PLANS: PREFINISHED VENTED SOFFIT AT EAVE PER MANUFACTURER. (VERIEY FIRE SEPARATION DISTANCE FOR SOFFIT PROTECTION PER NORC SECTION R302.1.1 AND TABLE R302.1)



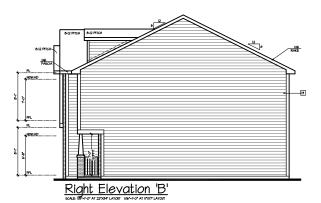




AVAILABLE WITH OPTIONAL 9'-1" FIRST FLOOR PLATE NOTES AT OPT 9'-1" PLT: - WDW HT SET AT 7'-6" - INTERIOR SOFFITS AT 8'-0" - EXTERIOR SOFFITS AT 8'-0"

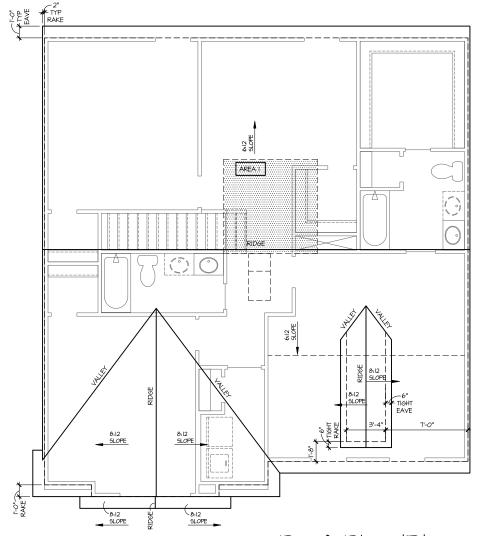

Roof Plan 'B'

TRUSS MANUFACTURE T VERIFY HEELS PER COMMUNITY STANDARDS BUILDER TO VERIFY PRIOR TO CONSTRUCTION

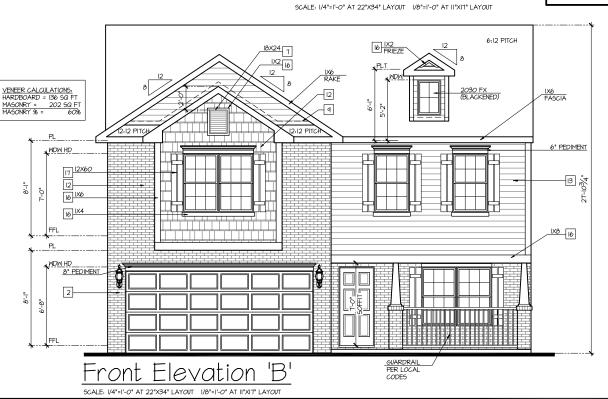

ELEVATION

N

S

Ш

Σ

0

AB)'


(SF


PINEHURST

DATE

REV 28. 0 **PLAN**


> SHEET NUMBER 1B

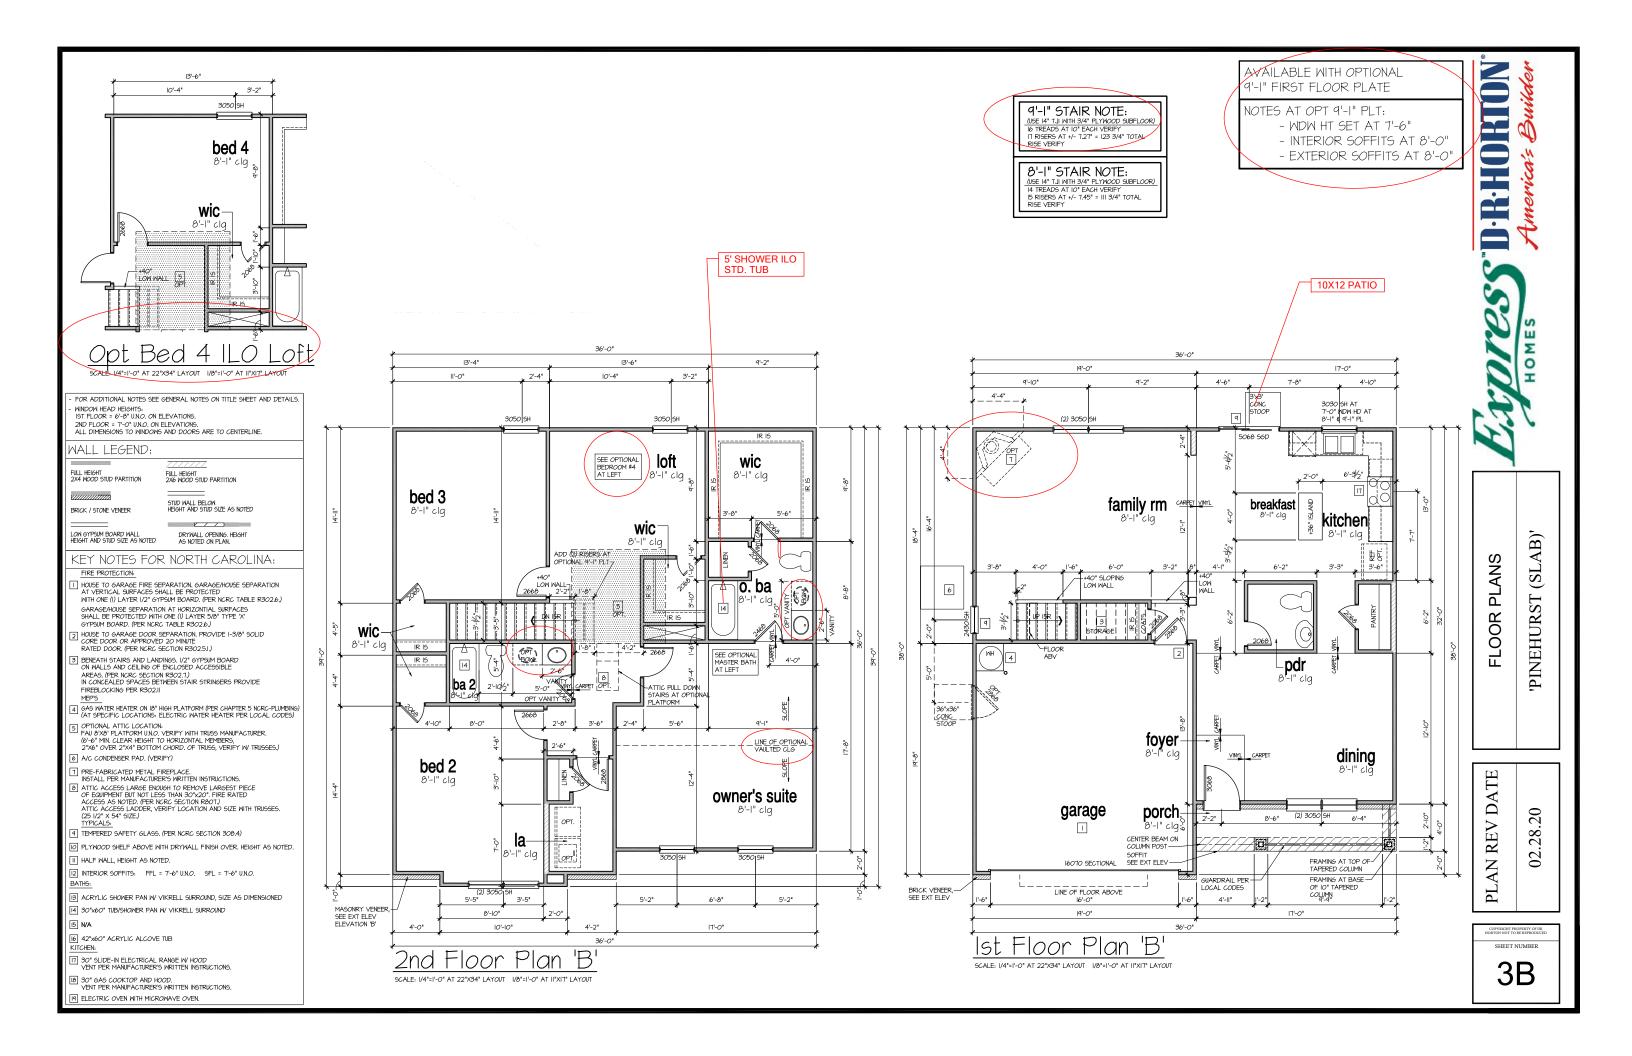

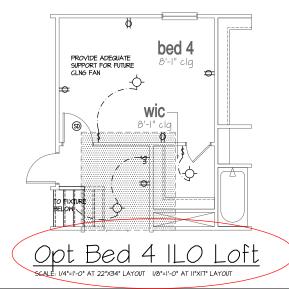

- PROVIDE GROUNDING ELECTRICAL ROD PER LOCAL CODES.
- PROVIDE AND INSTALL ARC FAULT CIRCUIT-INTERRUPTERS (AFCI) AS REQUIRED BY NATIONAL ELECTRICAL CODE (NEC) AND MEETING THE REQUIREMENTS OF ALL GOVERNING CODES. ALL EXHAUST FANS SHALL HAVE BACKDRAFT DAMPERS.
- FAN/LIGHTS IN WET/DAMP LOCATIONS SHALL BE LABLED "SUITABLE FOR WET OR DAMP LOCATIONS.
- ELECTRICAL SYSTEMS ARE SHOWN FOR INTENT ONLY. THESE SYSTEMS SHALL BE ENGINEERED BY OTHERS, THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROPER INSTALLATION AND PLACEMENT
- PROVIDE AND INSTALL LOCALLY CERTIFIED SMOKE DETECTORS AND CO2 DETECTORS AS REQUIRED BY NATIONAL FIRE PROTECTION ASSOCIATION (NFPA) AND MEETING THE REQUIREMENTS OF ALL GOVERNING CODES. - PROVIDE AND INSTALL GROUND FAULT CIRCUIT-INTERRUPTERS (GFL) AS REQUIRED BY NATIONAL ELECTRICAL CODE (NEC) AND MEETING THE REQUIREMENTS OF ALL GOVERNING CODES.
- ELECTRICAL CONTRACTOR TO PROVIDE REQUIRED DIRECT HOOK-UPS/CUTOFFS.
- HVAC CONTRACTOR TO VERIFY THERMOSTAT LOCATIONS.
- ALL ELECTRICAL AND MECHANICAL EQUIPMENT (FURNACES, A/C UNITS, ELECTRICAL PANELS, SANITARY SUMP PITS, DRAIN TILE SUMP, AND WATER HEATERS) ARE SUBJECT TO RELOCATION DUE TO FIELD CONDITIONS.
- PROVIDE POWER, LIGHT AND SWITCH AS REQUIRED FOR ATTIC FURNACE PER CODE AND MANUFACTURER'S WRITTEN INSTRUCTIONS.

LEGI	END:		
ф	DUPLEX OUTLET		CEILING MOUNTED INCANDESCENT LIGHT FIXTURE
фир/бы	WEATHERPROOF GFI DUPLEX OUTLET	ф	WALL MOUNTED INCANDESCENT
∯ 6FI	GROUND-FAULT CIRCUIT-INTERRUPTER DUPLEX OUTLET		LIGHT FIXTURE RECESSED INCANDESCENT LIGHT FIXTURE
ф	HALF-SWITCHED DUPLEX OUTLET	Ф	(VP) = VAPOR PROOF
Ф 220√	220 VOLT OUTLET	•	CEILING MOUNTED LED LIGHT FIXTURE (VP) = VAPOR PROOF
0	REINFORCED JUNCTION BOX	•	EXHAUST FAN (VENT TO EXTERIOR)
\$	MALL SMITCH	- (EXHAUST FAN/LIGHT COMBINATION (VENT TO EXTERIOR)
\$3	THREE-WAY SWITCH		FLUORESCENT LIGHT FIXTURE
\$4	FOUR-WAY SWITCH		TEOPESCHI EIGHT FIXIONE
CH	CHIMES		TECH HUB SYSTEM
9	PUSHBUTTON SWITCH	X	CEILING FAN (PROVIDE ADEQUATE SUPPORT)
99	IIOV SMOKE ALARM W BATTERY BACKUP		CEILING FAN WITH INCANDESCENT
69	IIOV SMOKE ALARM CO2 DETECTOR COMBO		LIGHT FIXTURE (PROVIDE ADEQUATE SUPPORT)
Ð	THERMOSTAT	∞	GAS SUPPLY WITH VALVE
PH	TELEPHONE		
TV	TELEVISION	→#	HOSE BIBB
	ELECTRIC METER	-+ _{GM}	I/4" WATER STUB OUT
	ELECTRIC PANEL		
-	DISCONNECT SWITCH	l -Ä	WALL SCONCE

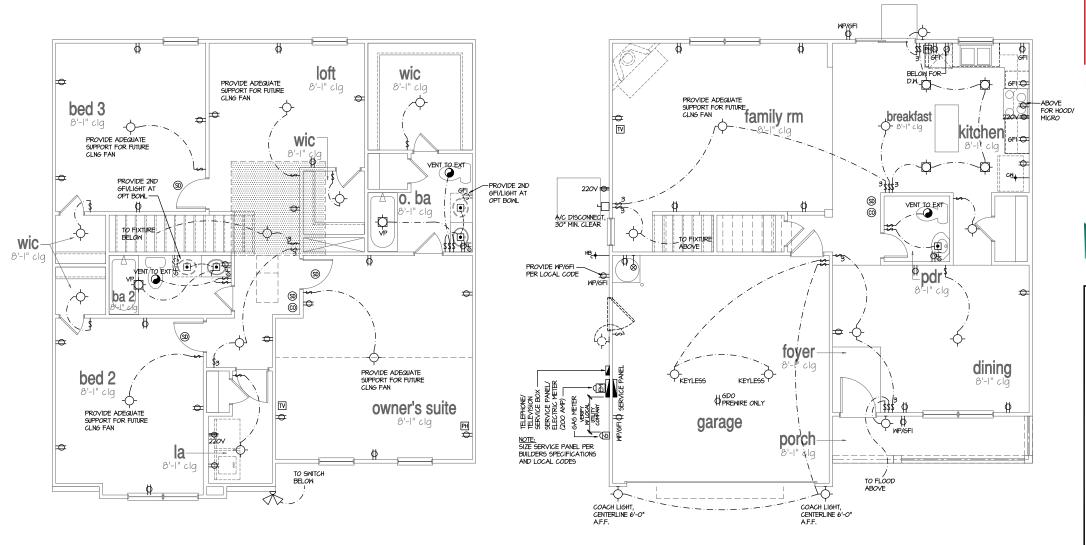

2nd Floor Plan 'A'

Ist Floor Plan 'A' SCALE: I/4"=I'-0" AT 22"X34" LAYOUT I/8"=I'-0" AT II"XI7" LAYOUT

ALL ELEVATIONS ARE SIMILAR

'PINEHURST (SLAB)' FLOOR PLANS

Σ

D-R-HORTON

PLAN REV DATE .28.20

SHEET NUMBER

DESIGN SPECIFICATIONS:

Construction Tupe: Commerical □ Residential □

Applicable Building Codes:

• 2018 North Carolina Residential Building Code with All Local Amendments ASCE 1-10: Minimum Design Loads for Buildings and Other Structures

sign L	oads:		
Ĭ.	Roof	Live Loads	
	1.1.	Conventional 2x	20 PSF
	1.2.	Trues	20 PSF
		12.1. Attic Truss	60 PSF
2.	Roof	Dead Loads	
	2.1.	Conventional 2x	10 PSF
	2.2.	Trues	20 PSF
3.	Snow		15 PSF
	3.1.	importance Factor	10
4.	Floor	Live Loads	
	2.1	Time Discelline	AM DOE

 Typ. Dwelling
 Sleeping Areas 3Ø PSF

5. Floor Dead Loads 5.1. Conventional 2x 52. I-Joist IA PSE 5.3. Floor Truss . 15 PSF 6. Ultimate Design Wind Speed (3 sec. gust) 6.l. Exposure

62. Importance Factor..... 63. Wind Base Shear 6.3.I. Vx = 6.32.Vu =

1. Component and Cladding (in PSF)

	7			
MEAN ROOF HT.	UP TO 30°	30'1"-35'	35'1"-40'	40'1"-45'
ZONE I	16.7,-18.0	17.5,-18.9	18.2,-19.6	18.7,-20.2
ZONE 2	16.7,-21.0	17.5,-22.1	18.2,-22.9	18.7,-23.5
ZONE 3	16.7,-21.0	17.5,-22.1	18.2,-22.9	18.7,-23.5
ZONE 4	182,-19.0	19.2,-20.0	19.9,-20.7	20.4,-21.3
ZONE 5	182,-240	19.2,-25.2	19.9,-26.1	20.4,-26.9

3.	Seismi	Ċ	
	8.1.	Site Class	D
	82.	Design Category	С
	83.	Importance Factor	10
	8.4.	Seismic Use Group	1
	85.	Spectral Response Acceleration	

8.5.1. Sms = %g 8.5.2. Sml = %g

8.52.5ml = %g 8.6. Seismic Base Shear 861 Vx = 8.62.Vy =

8.1. Basic Structural System (check one) □ Bearing Wall
 □ Building Frame
 □ Moment Frame

□ Dual w/ Special Moment Frame
□ Dual w/ Intermediate R/C or Special Steel ☐ Inverted Pendulum

Wind ⊠ 2000psf

of a licensed professional engineer. The resulting soil shall be compacted to a minimum of 95%

polyethylene membrane if placement of concrete does not occur within 24 hours of excavation.

Structural steel shall receive one coat of shop applied

Welding Society's Structural Welding Code AWS DII. Electrodes for shop and field welding shall be class ET@XX. All welding shall be performed by a certified welder per the above

Concrete shall have a normal weight aggregate and a minimum compressive strength (f'c) at 28 days of 3000 psi, unless otherwise noted on the plan.

Concrete shall be proportioned, mixed, and placed in accordance with the latest editions of ACI 318: "Building Code Requirements for Reinforced Concrete" and ACI 301:

entrainment amounts (in percent) shall be within -1% to +2% of



STRUCTURAL PLANS PREPARED FOR:

PINEHURST - LH

PROJECT ADDRESS:

OWNER: DR Horton, Inc. 8001 Arrowridge Blyd

DESIGNER: GMD Design Group 102 Fountain Brook Circle

Suite C Cary, NC 27511

These drawings are to be coordinated with the architectural, mechanical, plumbing, electrical, and civil drawings. This coordination is not the responsibility of the structural engineering of record (SER). Should any discrepancies become apparent, the contractor shall notify 6LPMIT Engineering, Laboratory 4 Testing, P.C. before construction begins.

PLAN ABBREVIATIONS:

AB	ANCHOR BOLT	PT	PRESSURE TREATED
AFF	ABOVE FINISHED FLOOR	R9	ROOF SUPPORT
CJ	CEILING JOIST	SC.	STUD COLUMN
CLR	CLEAR	SJ	SINGLE JOIST
DJ	DOUBLE JOIST	SPF	SPRUCE PINE FIR
D6P	DOUBLE STUD POCKET	SST	SIMPSON STRONG-TIE
EE	EACH END	SYP	SOUTHERN YELLOW PINE
EW	EACH WAY	TJ	TRIPLE JOIST
NTS	NOT TO SCALE	TSP	TRIPLE STUD POCKET
ОС	ON CENTER	TYP	TYPICAL
PSF	POUNDS PER SQUARE FOOT	UNO	UNLESS NOTED OTHERWISE
PSI	POUNDS PER SQUARE INCH	ww.	WELDED WIRE FABRIC

Roof truss and floor joist layouts, and their corresponding loading details, were not provided to SUMMI Engineering, Laboratory 4 Testing, P.C. (SUMMI) prior to the initial design. Therefore, trus and joist directions were assumed based on the information provided by <u>DR Horton. Inc.</u> Subsequent plan revisions based on roof truss and floor joist layouts shall be noted in the revision list, indicating the date the layouts were provided. Should any discrepancies become apparent, the contractor shall notify SUMMIT immediately

SHEET LIST:

REVISION LIST:

Date

5.16.17

5 12.18.18 17837

8.13.18

9 11.30.18 17.837.24

IØ 3.14.19 21851

II 62819 2185IR

6.19.17 125Ø4R2

8.14.17 125Ø4R3

11.17.17 125Ø4R4

7.1Ø18 17837R

10518 17837R3

17837R2

12504R

Revision

Sheet No.	Description
CSI	Cover Sheet, Specifications, Revisions
51.Øm	Monolithic Slab Foundation
SIØs	Stem Wall Foundation
5lØc	Crawl Space Foundation
S1.Øb	Basement Foundation
52.Ø	Basement Plan
53.Ø	First Floor Plan
54.Ø	Second Floor Plan
95.Ø	Roof Framing Plan

Description

Revised garage slab note. Revised roof

overframing. Verified floor joist layouts provided by 84 Lumber dated 3.31.15. Verified roof truss

ayouts provided by 84 Lumber dated 3.28.11.

Added stem wall foundation plan

Revised columns at front porch

Revised SYP and pressure treated member notes

Added crawl space foundation

Revised per new architectural files. Added

Revised dimension at front porch column

included stick framing option at extended porch

Revised NC version only for 2018 NCRC

Revised TN version only for 2018 IRC

Added optional vault

DR HORTON PROJECT SIGN-OFF:

Manager	Signature
Operations	
Operations System	
Operations Product Development	

summit



GENERAL STRUCTURAL NOTES:

The design professional whose seal appears on these drawings is the structural engineer of record (SER) for this project. The SER bears the responsibility of the primary structural elements and the performance of this structure. No other party may revise, alter, or delete any structural aspects of these construction documents without written permission of SMMIT Engineering, Laboratory 4 Testing, P.C. (SMMIT) or the SER. For the purposes of these construction documents the SER and SUMMIT shall be considered the same entity.

The structure is only stable in its completed form. The contractor

hall provide all required temporary bracing during construction to stabilize the structure.

The SER is not responsible for construction sequences, methods,

or techniques in connection with the construction of this structure. The SER will not be held responsible for the contractor's failure to conform to the contract documents

should any non-conformities occur.

Any structural elements or details not fully developed on the and state that all the completed under the direction of a licensed professional engineer. These shop drawings shall be submitted to SUMMIT for review before any construction begins. The shop drawings will be reviewed for overall compliance as it relates to the structural design of this project. Verification of the shop drawings for dimensions, or for actual field conditions,

is not the responsibility of the SER or SUMMIT.

Verification of assumed field conditions is not the responsibility of the SER. The contractor shall verify the field conditions for accuracy and report any discrepancies to SUMMIT before

accuracy and report any discrepancies to Sull'IIII before construction begins.

6. The SER is not responsible for any secondary structural elements or non-structural elements, except for the elements specifically noted on the structural drawings.

7. This structure and all construction shall conform to all

applicable sections of the international residential code. This structure and all construction shall conform to all

applicable sections of local building codes.

9. All structural assemblies are to meet or exceed to requirements of the current local building code.

The structural engineer has not performed a subsurface investigation. Verification of this assumed value is the responsibility of the owner or the contractor. Should any adverse soil condition be encountered the SER must be contacted before proceeding.

The bottom of all footings shall extend below the frost line for the region in which the structure is to be constructed. However, the bottom of all footings shall be a minimum of 12" below grade. Any fill shall be placed under the direction or recommendation

maximum dry density.

Excavations of footings shall be lined temporarily with a 6 mil

No concrete shall be placed against any subgrade containing

STRUCTURAL STEEL:

Structural steel shall be fabricated and erected in accordance with the American institute of Steel Construction "Code of Standard Practice for Steel Buildings and Bridges" and the manual of Steel Construction "Load Resistance Factor Design latest editions.

rust-irhibitive paint. All steel shall have a minimum yield stress ($\mathbf{F_y}$) of 36 ksi unless

Welding shall conform to the latest edition of the American

"Specifications for Structural Concrete for Buildings".

Air entrained concrete must be used for all structural elements exposed to freeze/thaw cycles and deicing chemicals. Air target values as follows: 3.1. Footings: 5%

32 Exterior Slabs: 5%

No admixtures shall be added to any structural concrete without written permission of the SER

Concrete slabs-on-grade shall be constructed in accordance with ACI 302.IR-96: "Guide for Concrete 9lab and 9lab Construction".

subgrade modulus of k-250 pcl and a design loading of 200 pst. The SER is not responsible for differential settlement, slab cracking or other future defects resulting from unreported conditions not in accordance with the above assumptions.

Control or saw cut joints shall be spaced in interior slabs-on-grade at a maximum of 15'-0" O.C. and in exterior slabs-on-grade at a maximum of 10'-0" unless otherwise noted

Control or saw cut joints shall be produced using conventional process within 4 to 12 hours after the slab has been finished

Reinforcing steel may not extend through a control joint.
Reinforcing steel may extend through a saw cut joint.
All welded ulve fabric (WIIIF) for concrete slabs-on-grade shall be placed at mid-depth of slab. The WIIIF, shall be securely

CONCRETE REINFORCEMENT:

Fibrous concrete reinforcement, or fibermesh, specified in concrete slabs-on-grade may be used for control of cracking due to shrinkage and thermal expansion/contraction, lowered abrasion resistance, and residual strength

Fibermesh reinforcing to be 100% virgin polypropylene fibers containing no reprocessed olefin materials and specifically manufactured for use as concrete secondary reinforcemen

manufactured for use as concerns secondary reminorcement. Application of fillbermesh per cubic yard of concrete shall equal a minimum of 01% by volume (15 pounds per cubic yard) Filbermesh shall comply with ASTM CIII6, any local building code requirements, and shall meet or exceed the current industry

Steel reinforcing bars shall be new billet steel conforming to

ASTM A615, grade 60.
Detailing, fabrication, and placement of reinforcing steel shall be in accordance with the latest edition of ACI 315: "Manual of Standard Practice for Detailing Concrete Structures" Horizontal footing and wall reinforcement shall be continuous

and shall have 90° bends, or corner bars with the same

size/spacing as the horizontal reinforcement with a class B Lab reinforcement as required, a minimum of 40 bar diameters for tension or compression unless otherwise noted. Splices in masorry shall be a minimum of 48 bar diameters.

Where reinforcing dowels are required, they shall be equivalent in size and spacing to the vertical reinforcement. The dowel shall extend 48 bar diameters vertically and 20 bar diameters into the footing. Where reinforcing steel is required vertically, dowels shall be

provided unless otherwise noted WOOD FRAMING: Solid sawn wood framing members shall conform to the specifications listed in the latest edition of the "National Design Specification for Wood Construction" (NDS). Unless

otherwise noted, all wood framing members are designed to be Southern-Yellow-Pine (GYP) 2.

LVL or PSL engineered wood shall have the following minimum

design values: 2.1. E = 1,900,000 psi

2.2. Fb = 2600 psi 23.Fv = 285 psi

Wood in contact with concrete, masonry, or earth shall be pressure treated in accordance with AWPA standard C-I5. All other moisture exposed wood shall be treated in accordance with AWPA standard C-2

Nails shall be common uire nails unless otherwise noted Lag screws shall conform to ANSI/ASME standard BI821-1981. Lead holes for lag screws shall be in accordance with NDS

specifications.

All beams shall have full bearing on supporting framing members unless otherwise noted.

Exterior and load bearing stud walls are to be 2x4.57P.2.6 [6" O.C. unless otherwise noted. Studs shall be continuous from the sole plate to the double top plate. Studs shall only be discontinuous at headers for window/door openings. A minimu of one king stud shall be placed at each end of the header. King studs shall be continuous.

Individual stude forming a column shall be attached with one 10d nail *6" O.C. staggered. The stud column shall be continuous to the foundation or beam. The column shall be properly blocked at all floor levels to ensure proper load transfer. Multi-ply beams shall have each ply attached with (3) IOd nails a

Four and five ply beams shall be bolted together with (2) rows of 1/2" diameter through bolts staggered @ 16" O.C. unless nated atherwise

The wood truss manufacturer/fabricator is responsible for the design of the wood trusses. Submit sealed shop drawings and supporting calculations to the SER for review prior to fabrication. The SER shall have a minimum of five (5) days for review. The review by the SER shall review for overall compliance with the design documents. The SER shall assume no responsibility for the correctness for the structural design for

responsibility for the correctness for the structural design for the wood trusses.

The wood trusses shall be designed for all required loadings as specified in the local building code, the ASCE Standard "Minimum Design Loads for Buildings and Other Structures."

(ASCE 1-10), and the loading requirements shown on these specifications. The truss drawings shall be coordinated with all other construction documents and provisions provided for loads shown on these drawings including but not limited to HVAC equipment, piping, and architectural fixtures attached to

the trusses.
The trusses shall be designed, fabricated, and erected in accordance with the latest edition of the "National Design Specification for Wood Construction." (NDS) and "Design Specification for Metal Plate Connected Wood Trusses."

The truss manufacturer shall provide adequate bracing Recommendations for Handling, Installing, and Bracing Metal Plate Connected Wood Trusses" (HIB-91). This bracing, both temporary and permanent, shall be shown on the shop drawings. Also, the shop drawings shall show the required attachments for

the trusses.

Any chords or truss webs shown on these drawings have been shown as a reference only. The final design of the trusses shall

EXTERIOR WOOD FRAMED DECKS:

Decks are to be framed in accordance with local building codes and as referenced on the structural plans, either through code references or construction details.

Fabrication and placement of structural wood sheathing shall be in accordance with the APA Design/Construction Guide
"Residential and Commercial," and all other applicable APA standards

All structurally required wood sheathing shall bear the mark of

Wood wall sheathing shall comply with the requirements of local building codes for the appropriate state as indicated on these drawings. Refer to wall bracing notes in plan set for more information. Sheathing shall be applied with the long direction

perpendicular to framing, unless noted otherwise. Roof sheathing shall be AFA rated sheathing exposure | σ 2. Roof sheathing shall be continuous over two supports and attached to its supporting roof framing with (1)-8d CC nall at 6"o/c at panel edges and at 12"o/c in panel field unless otherwise noted on the plans. Sheathing shall be applied with the long direction perpendicular to framing. Sheathing shall have a span rating consistent with the framing spacing. Use the long direction perpendicular to framing, Sheathing shall have a span rating consistent with the framing spacing. Use suitable edge support by use of plywood clips or lumber blocking unless otherwise noted. Panel end joints shall occur over framing. Apply building paper over the sheathing as required by the state Building Code.

Ubod floor sheathing shall be APA rated sheathing exposure I or 2. Attach sheathing to Its supporting framing with (I)-8d CC ringshark nail at 6"olc at panel edges and at 12"o/c in panel field unless otherwise noted on the plans. Sheathing shall be applied perpendicular to framing Sheathing shall have a span.

applied perpendicular to framing. Sheathing shall have a spain rating consistent with the framing spacing. Use suitable edge support by use of T4G plywood or lumber blocking unless otherwise noted. Panel end joints shall occur over framing Apply building paper over the sheathing as required by the

state Building Code. Sheathing shall have a 1/8" gap at panel ends and edges as mended in accordance with the APA

STRUCTURAL FIBERBOARD PANELS:

Fabrication and placement of structural fiberboard sheathing shall be in accordance with the applicable AFA standards.

All structurally required fiberboard sheathing shall bear the mark of the AFA.

mians or the AFA.

Fiberboard wall sheathing shall comply with the requirements of local building codes for the appropriate state as indicated on these drawings. Refer to wall bracing notes in plan set for more

Sheathing shall have a 1/8" gap at panel ends and edges are

PROJECT: Pinehurst - LH



SCALE: 22x34 1/4'=1'-@' lk/1 1/8'=1'-@'

DRAWN BY: EMB CHECKED BY: UAL

PROJECT 4: 528-06R: 21851R

REFER TO COVERSHEET FOR A COMPLETE LIST OF REVISIONS

FOUNDATION NOTES:

- FOUNDATIONS TO BE CONSTRUCTED IN ACCORDANCE WITH CHAPTER 4 OF THE 2018 NORTH CAROLINA RESIDENTIAL BUILDING CODE WITH ALL LOCAL AMENDMENTS.
- 2. STRUCTURAL CONCRETE TO BE F_c = 3000 PSI, PREPARED AND PLACED IN
- ACCORDANCE WITH ACI STANDARD 318.
 FOOTINGS TO BE PLACED ON UNDISTURBED EARTH, BEARING A MINIMUM OF 12" BELOW ADJACENT FINISHED GRADE, OR AS OTHERWISE DIRECTED BY THE CODE ENFORCEMENT OFFICIAL.

 4. FOOTING SIZES BASED ON A PRESUMPTIVE SOIL BEARING CAPACITY OF
- 2000 PSE CONTRACTOR IS SOLELY RESPONSIBLE FOR VERIFYING THE SUITABILITY OF THE SITE SOIL CONDITIONS AT THE TIME OF CONSTRUCTION.

 5. FOOTINGS AND PIERS SHALL BE CENTERED UNDER THEIR RESPECTIVE
- ELEMENTS. PROVIDE 2" MINIMUM FOOTING PROJECTION FROM THE FACE OF
- 6. MAXIMUM DEPTH OF UNBALANCED FILL AGAINST MASONRY WALLS TO BE AS SPECIFIED IN SECTION R404.1 OF THE 2018 NORTH CAROLINA RESIDENTIAL BUILDING CODE.
- PILASTERS TO BE BONDED TO PERIMETER FOUNDATION WALL.
- PROVIDE FOUNDATION WATERPROOFING, AND DRAIN WITH POSITIVE SLOPE TO OUTLET AS REQUIRED BY SITE CONDITIONS.
 PROVIDED PERMETER INSULATION FOR ALL FOUNDATIONS PER 2018 NORTH
- CAROLINA RESIDENTIAL BUILDING CODE.

 10. CORBEL FOUNDATION WALL AS REQUIRED TO ACCOMMODATE BRICK
- VENEERS.
- VENERO.

 CRAIUL SPACE TO BE GRADED LEVEL, AND CLEARED OF ALL DEBRIS.
 FOUNDATION ANCHORAGE SHALL BE CONSTRUCTED PER THE 1016 NORTH
 CAROLINA RESIDENTIAL CODE SECTION R403.16. MINIMUM 1/2" DIA. BOLTS SPACED AT 6'-0" ON CENTER WITH A "I" MINIMUM EMBEDMENT INTO MASONRY OR CONCRETE. ANCHOR BOLTS SHALL BE 12" FROM THE END OF EACH PLATE SECTION, MINIMUM (2) ANCHOR BOLTS PER PLATE SECTION, ANCHOR BOLTS SHALL BE LOCATED IN THE CENTER THIRD OF THE PLATE.

DJ = DOUBLE JOIST GT = GIRDER TRUSS SC = STUD COLUMN SJ = SINGLE JOIST FT = FLOOR TRUSS DR = DOUBLE RAFTER EE = EACH END TJ = TRIPLE JOIST OC = ON CENTER CL = CENTER LINE PI = POINT I OAD

- 10. ALL PIERS TO BE 16"x16" MASONRY AND ALL PILASTERS TO BE 8"x16"
- ALL PIERS (10 DE 16 X16* "INSOUNT AND ALL PIERS 10 DE 5 X16* "MASONRY, TYPICAL (INO)

 II. WALL FOOTINGS TO BE CONTINUOUS CONCRETE, SIZES PER STRUCTURAL PLAN.

 12. A FOUNDATION EXCAYATION OBSERVATION SHOULD BE CONDUCTED BY A PROFESSIONAL GEOTECHNICAL ENGINEER, OR HIS QUALIFIED REPRESENTATIVE. IF ISOLATED AREAS OF YIELDING MATERIALS AND/OR POTENTIALLY EXPANSIVE SOILS ARE OBSERVED IN THE FOOTING. EXCAVATIONS AT THE TIME OF CONSTRUCTION, SUMMIT ENGINEERING, LABORATORY & TESTING, P.C. MUST BE PROVIDED THE OPPORTUNITY TO REVIEW THE FOOTING DESIGN PRIOR TO CONCRETE PLACEMENT.
- ALL FOOTINGS 4 SLABS ARE TO BEAR ON UNDISTURBED SOIL OR 95% COMPACTED FILL, VERIFIED BY ENGINEER OR CODE OFFICIAL.

REFER TO BRACED WALL PLAN FOR PANEL LOCATIONS AND ANY REQUIRED HOLDOWNS, ADDITIONAL INFORMATION PER SECTION R602.103 AND FIGURES R602.1005, R602.10.1, R602.10.8(2) OF THE 2015 IRC

NOTE: ALL EXTERIOR FOUNDATION DIMENSIONS ARE TO FRAMING, AND NOT BRICK VENEER, UNO

NOTE: A 4" CRUSHED STONE BASE COURSE IS NOT REQUIRED WHEN SLAB IS INSTALLED ON WELL-DRAINED OR SAND-GRAVEL MIXTURE SOILS CLASSIFIED AS GROUP I PER TABLE R405.1

THESE PLANS ARE DESIGNED IN ACCORDANCE WITH ARCHITECTURAL PLANS PROVIDED BY <u>OR HORTON</u>
COMPLETED/REVISED ON 6/12/2018, IT IS THE RESPONSIBILITY OF
THE CLIENT TO NOTIFY SUMMIT ENGINEERING, LABORATORY & TESTING P.C. IF ANY CHANGES ARE MADE TO THE ARCHITECTURAL PLANS PRIOR TO CONSTRUCTION. SUMMIT ENGINEERING, LABORATORY & TESTING, P.C. CANNOT GUARANTEE THE ADEQUACY OF THESE STRUCTURAL PLANS WHEN USED WITH ARCHITECTURAL


STRUCTURAL MEMBERS ONLY

ENGINEERING SEAL APPLIES ONLY TO STRUCTURAL COMPONENTS ON THIS DOCUMENT, SEAL DOES NOT INCLUDE CONSTRUCTION MEANS, METHODS, TECHNIQUES. SEQUENCES, PROCEDURES OR SAFETY PRECAUTIONS.
ANY DEVIATIONS OR DISCREPANCIES ON PLANS ARE TO BE BROUGHT TO THE IMMEDIATE ATTENTION OF SUMMIT ENGINEERING, LABORATORY & TESTING, P.C. FAILURE TO DO SO WILL VOID SUMMIT LIABILITY.

STRUCTURAL ANALYSIS BASED ON 2018 NCRC.

MONOLITHIC SLAB FOUNDATION PLAN

SCALE: 1/4"=1'-@" ON 22"x34" OR 1/8"=1'-@" ON 11"x17"

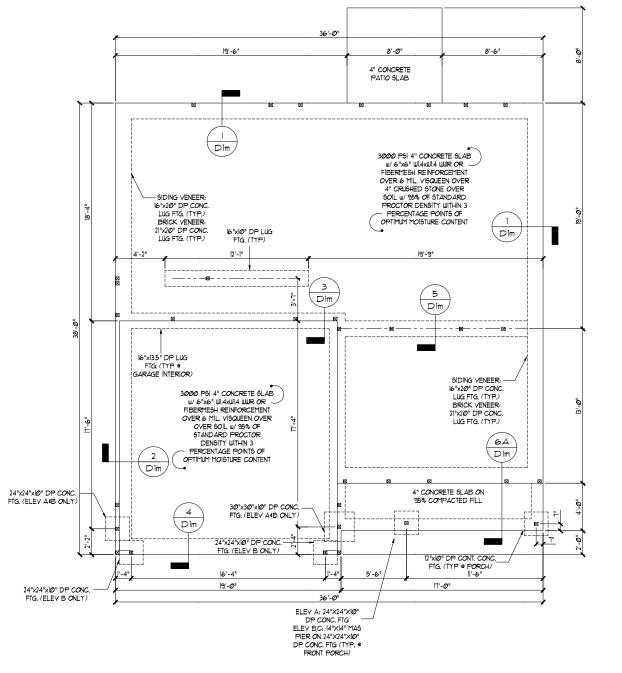

MONOLITHIC SLAB FOUNDATION - ALL ELEVATIONS





ndati Ω̈́ Slab O



8CALE: 22x34 1/4":1"-0" 1k11 1/8":1"-0" PROJECT 4: 528-06R: 21858 DRAWN BY: EMB

CHECKED BY: WAJ

REFER TO COVER SHEET FOR A COMPLETE LIST OF REVISIONS

SI.Øm

GENERAL STRUCTURAL NOTES:

- CONSTRUCTION SHALL CONFORM TO 2018 NORTH CAROLINA RESIDENTIAL BUILDING CODE WITH ALL LOCAL AMENDMENTS.
- CONTRACTOR SHALL VERIFY ALL DIMENSIONS, CONTRACTOR SHALL COMPLY WITH THE CONTENTS OF THE DRAWING FOR THIS SPECIFIC PROJECT, ENGINEER IS NOT RESPONSIBLE FOR ANY DEVIATIONS FROM THIS PLAN.
- CONTRACTOR IS RESPONSIBLE FOR PROVIDING TEMPORARY BRACING REQUIRED
- O RESIST ALL FORCES ENCOUNTERED DURING ERECTION. PROPERTIES USED IN THE DESIGN ARE AS FOLLOWS:
- MICROLLAM (L.V.). F_b = 2600 PSI, F_v = 285 PSI, E = 19x10⁶ PSI PARALLAM (PSI.): F_b = 2900 PSI, F_v = 290 PSI, E = 125x10⁶ PSI ALL WOOD MEMBERS SHALL BE 12 SYP UNLESS NOTED ON PLAN. ALL STUD
- COLUMNS AND JOISTS SHALL BE #2 SYP (UNO)
- ALL BEAMS SHALL BE SUPPORTED WITH A (2) 2x4 *2 SYP STUD COLUMN AT EACH
- END UNLESS NOTED OTHERWISE.
- ALL REINFORCING STEEL SHALL BE GRADE 60 BARS CONFORMING TO ASTM A615 AND SHALL HAVE A MINIMUM COVER OF 3". FOUNDATION ANCHORAGE SHALL BE CONSTRUCTED PER THE 2016 NORTH CAROLINA RESIDENTIAL CODE SECTION R403.16. MINIMUM 1/2" DIA. BOLTS SPACED AT 6'-0" ON CENTER WITH A 7" MINIMUM EMBEDMENT INTO MASONRY OR
- CONCRETE ANCHOR BOLTS SHALL BE 12" FROM THE END OF EACH PLATE SECTION MINIMUM (2) ANCHOR BOLTS PER PLATE SECTION. ANCHOR BOLTS SHALL BE LOCATED IN THE CENTER THIRD OF THE PLATE.
- CONTRACTOR TO PROVIDED LOOKOUTS WHEN CEILING JOISTS SPAN
- PERPENDICULAR TO RAFTERS.
 FLITCH BEAMS, 4-PLY LVLS AND 3-PLY SIDE LOADED LVLS SHALL BE BOLTED TOGETHER WITH 1/2" DIA. THRU BOLTS SPACED AT 24" O.C. (MAX) STAGGERED OR EQUIVALENT CONNECTIONS PER DETAIL 1/D31; MIN. EDGE DISTANCE SHALL BE 2" AND (2) BOLTS SHALL BE LOCATED MINIMUM 6" FROM EACH END OF THE BEAM.
- ALL NON-LOAD BEARING HEADERS SHALL BE (1) FLAT 2x4 SYP *2 DROPPED FOR NON-LOAD BEARING HEADERS EXCEEDING 8'-0" IN WIDTH AND/OR WITH MORE THAN 2'-0" OF CRIPPLE WALL ABOVE, SHALL BE (2) FLAT 2x4 SYP 12, DROPPED. (UNLESS NOTED OTHERWISE)

PL = POINT LOAD

SJ = SINGLE JOIST FT = FLOOR TRUSS DR = DOUBLE RAFTER DJ = DOUBLE JOIST GT = GIRDER TRUSS SC = STUD COLUMN EE = EACH END TJ = TRIPLE JOIST TR = TRIPLE RAFTER

NOTE:

CL = CENTER LINE

DESIGNATES JOIST SUPPORTED LOAD BEARING WALL ABOVE, PROVIDE BLOCKING UNDER JOIST SUPPORTED LOAD BEARING WALL.

JOIST & BEAM SIZES SHOWN ARE MINIMUMS, BUILDER MAY INCREASE DEPTH FOR EASE OF CONSTRUCTION.

INSTALL ANY REQUIRED HOLDOWNS PER SECTION R602.10.8(1) AND R602.10.8(2) OF THE 2015 IRC

THESE PLANS ARE DESIGNED IN ACCORDANCE WITH ARCHITECTURAL PLANS PROVIDED BY DR HORTON COMPLETED/ACTIVES 1950 ON 61/2008, IT S'THE RESPONSIBILITY OF THE CLIENT TO NOTIFY SUMMIT ENGINEERING, LABORATORY (TESTING, P.C. IF ANY CHANGES ARE MADE TO THE ARCHITECTURAL PLANS PRIOR TO CONSTRUCTION. SUMMIT ENGINEERING. LABORATORY & TESTING, P.C. CANNOT GUARANTEE THE ADEQUACY OF THESE STRUCTURAL PLANS WHEN USED WITH ARCHITECTURAL PLANS DATED DIFFERENTLY THAN THE DATE LISTED ABOVE.

NOTE: MEMBER NOTED AS PRESSURE TREATED MAY BE FRAMED WITH NON-PRESSURE TREATED LUTBER PROVIDED THE ENTIRETY OF THE MEMBER IS WRAPPED TO PREVENT MOISTURE INTRUSION.

NOTE: REDUCE JOIST SPACING UNDER TILE FLOORS, GRANITE COUNTERTOPS AND/OR ISLANDS.


STRUCTURAL MEMBERS ONLY

ENGINEERING SEAL APPLIES ONLY TO STRUCTURAL COMPONENTS ON THIS DOCUMENT, SEAL DOES NOT INCLUDE CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, PROCEDURES OR SAFETY PRECAUTIONS. ANY DEVIATIONS OR DISCREPANCIES ON PLANS ARE TO BE BROUGHT TO THE IMMEDIATE ATTENTION OF SUMMIT ENGINEERING, LABORATORY & TESTING, P.C. FAILURE TO DO SO WILL VOID SUMMIT LIABILITY.

STRUCTURAL ANALYSIS BASED ON 2018 NCRC

FIRST FLOOR FRAMING PLAN

SCALE: 1/4"=1'-0" ON 22"x34" OR 1/8"=1'-0" ON 11"x17"

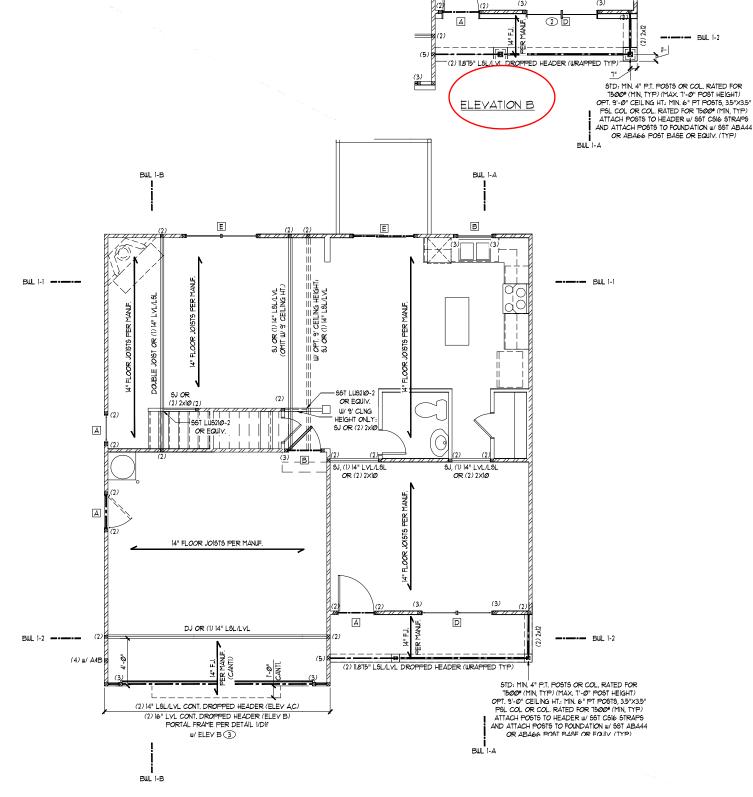

FIRST FLOOR I	FRAMING PLAN	- ELEVATION A
---------------	--------------	---------------

FIRST FLOOR BRACING (FT) CONTINUOUS SHEATHING METHOD			
			REQUIRED PROVIDE
BWL 1-1	11.0	21.5	
BWL 1-2	11.0	11.5	
BWL 1-A	103	32.Ø	
BWL 1-B	103	35.7	



HEADER SIZES SHOWN ON PLANS ARE MINIMUMS. GREATER HEADER SIZES MAY BE USED FOR EASE OF CONSTRUCTION ALL HEADERS TO BE DROPPED UNLESS NOTED OTHERWISE SC NOTED ON PLAN OVERRIDE SC LISTED ABOVE.

_			
	Li	NTEL SCHEDU	LE
	TAG	SIZE	OPENING SIZE
	\odot	L3x3x1/4"	LESS THAN 6'-0"
ſ	2	L5x3x1/4"	6'-0" TO 10'-0"
	3	L5x3-1/2"x5/16"	GREATER THAN 10'-0"
Ī	4	L5x3-1/2"x5/16" ROLLED OR EQUIV.	ALL ARCHED OPENINGS

SCREWS STAGGERED @ 16" O.C. (TYP FOR (3))

ALL HEADERS WHERE BRICK IS USED, TO BE: (UNO)

WALL STUD SCHEDULE

1<u>ST & 2ND FLOOR LOAD BEARING STUDS:</u>
2x4 STUDS @ 16" O.C. OR 2x6 STUDS @ 24" O.C. 1ST FLOOR LOAD BEARING STUDS W/ WALK-UP ATTIC: 2x4 STUDS @ 12" O.C. OR 2x6 STUDS @ 16" O.C. BASEMENT LOAD BEARING STUDS: 2x4 STUDS # 12" O.C. OR 2x6 STUDS # 16" O.C. NON-LOAD BEARING STUDS (ALL FLOORS): 2x4 STUDS # 24" O.C. TWO STORY WALLS: 2x4 STUDS # 12" OC OR 2x6 STUDS # 16" OC BALLOON FRAMED W/ CROSS BRACING . 6'-0" O.C. VERTICALLY

KING STUD R	EQUIREMENT:
OPENING WIDTH	KINGS (EACH END
LESS THAN 3'-Ø"	(1)
3'-Ø TO 4'-Ø"	(2)
4'-0" TO 8'-0"	(3)
8'-0" TO 12'-0"	(5)
12'-Ø" TO 16'-Ø"	(6)

KING STUD REQUIREMENTS ABOVE DO NOT APPLY TO PORTAL FRAMED OPENINGS

BRACED WALL NOTES:


- WALLS SHALL BE DESIGNED IN ACCORDANCE WITH SECTION R602.10 FROM THE 2015 INTERNATIONAL RESIDENTIAL CODE AS ALLOWED PER SECTION R60210 OF THE 2018 NC RESIDENTIAL CODE WALLS ARE DESIGNED FOR SEISMIC ZONES A-C AND ULTIMATE WIND
- SPEEDS UP TO 130 MPH. REFER TO ARCHITECTURAL PLAN FOR DOOR/WINDOW OPENING
- 3. BRACING MATERIALS, METHODS AND FASTENERS SHALL BE IN
- ACCORDANCE WITH IRC TABLE REØ2.104.

 ALL BRACED WALL PANELS SHALL BE FULL WALL HEIGHT AND SHALL NOT EXCEED 10 FEET FOR ISOLATED PANEL METHOD AND 12 FEET FOR CONTINUOUS SHEATHING METHOD WITHOUT ADDITIONAL ENGINEERING CALCULATIONS.
- MINIMUM PANEL LENGTH SHALL BE PER TABLE R602.10.5. THE INTERIOR SIDE OF EXTERIOR WALLS AND BOTH SIDES OF INTERIOR WALLS SHALL BE SHEATHED CONTINUOUSLY WITH MINIMUM 1/2" GYPSUM BOARD (UNO).
- FOR CONTINUOUS SHEATHING METHOD, EXTERIOR WALLS SHALL BE SHEATHED ON ALL SHEATHABLE SURFACES INCLUDING INFILL AREAS BETWEEN BRACED WALL PANELS ABOVE AND BELOW WALL
- OPENINGS, AND ON GABLE END WALLS.
 FLOORS SHALL NOT BE CANTILEVERED MORE THAN 24" BEYOND THE FOUNDATION OR BEARING WALL BELOW WITHOUT ADDITIONAL
- ENGINEERING CALCULATIONS.
 A BRACED WALL PANEL SHALL BE LOCATED WITHIN 10 FEET OF EACH END OF A BRACED WALL LINE.
- 10. THE MAXIMUM EDGE DISTANCE BETWEEN BRACED WALL PANELS
- SHALL NOT EXCEED 20 FEET. MASONRY OR CONCRETE STEM WALLS WITH A LENGTH OF 48" OR LESS SUPPORTING A BRACED WALL PANEL SHALL BE DESIGNED IN ACCORDANCE WITH FIGURE R60210.9 OF THE 2015 IRC.
- 12. BRACED WALL PANEL CONNECTIONS TO FLOOR/CEILING SHALL BE
- CONSTRUCTED IN ACCORDANCE WITH SECTION R602108
 BRACED WALL PANEL CONNECTIONS TO ROOF SHALL BE CONSTRUCTED IN ACCORDANCE WITH SECTION R602.10.82 AND
- FIGURES R602.10.8(1)4(2)4(3).

 14. CRIPPLE WALLS AND WALK OUT BASEMENT WALLS SHALL BE DESIGNED IN ACCORDANCE WITH SECTION R602.10.11
- PORTAL WALLS SHALL BE DESIGNED IN ACCORDANCE WITH FIGURE R602.10.6.4 (UNO)
- 16. ON SCHEMATIC, SHADED WALLS INDICATE BRACED WALL PANELS.

PF = PORTAL FRAME

GB = GYPSUM BOARD WSP = WOOD STRUCTURAL PANEL CS-XXX = CONT. SHEATHED ENG = ENGINEERED SOLUTI ENG = ENGINEERED SOLUTION PF-ENG = ENG. PORTAL FRAME summi



Framing b Pinehust -First 1



SCALE: 22x34 1/4"=1"-6" 1bt1 1/8"=1"-6" PROJECT 4 528-08R: 21851R DRAWN BY: EMB CHECKED BY: WAJ

REFER TO COVER SHEET FOR A COMPLETE LIST OF REVISIONS

S3.0

HEADER SCHEDULE						
TAG	SIZE	JACKS (EACH END)				
А	(2) 2x6	(1)				
В	(2) 2x8	(2)				
С	(2) 2x1Ø	(2)				
D	(2) 2x12	(2)				
E	(2) 9-1/4" L5L/LVL	(3)				
F	(3) 2x6	(1)				
G	(3) 2x8	(2)				
Н	(3) 2xlØ	(2)				
	(3) 2xl2	(2)				

HEADER SIZES SHOWN ON PLANS ARE MINIMMS, GREATER HEADER SIZES MAY BE USED FOR EASE OF CONSTRUCTION. ALL HEADERS TO BE DROPPED UNLESS NOTED OTHERWISE. SC NOTED ON PLAN OVERRIDE SC LISTED ABOVE.

LINTEL SCHEDULE					
TAG	OPENING SIZE				
0	L3x3x1/4"	LESS THAN 6'-0"			
2	L5x3x1/4"	6'-0" TO 10'-0"			
3	L5x3-1/2"x5/16"	GREATER THAN 10'-0"			
4	L5x3-1/2"x5/16" ROLLED OR EQUIV.	ALL ARCHED OPENINGS			

SECURE LINTEL TO HEADER w/ (2) 1/2" DIAMETER LAG SCREWS STAGGERED @ 16" O.C. (TYP FOR (3))

ALL HEADERS WHERE BRICK IS USED, TO BE: (UNO)

WALL STUD SCHEDULE

15T 4 2ND FLOOR LOAD BEARING STUDS:
2x4 STUDS = 16" O.C. OR 2x6 STUDS = 24" O.C.
15T FLOOR LOAD BEARING STUDS = 10" O.C. OR 2x6 STUDS = 16" O.C.
BASEMENT LOAD BEARING STUDS = 16" O.C.
2x4 STUDS = 0" O.C. OR 2x6 STUDS = 16" O.C.
NON-LOAD BEARING STUDS (ALL FLOORS):
2x4 STUDS = 24" O.C.
TWO STORY WALLS:
2x4 STUDS = 24" O.C.
TWO STORY WALLS:
2x4 STUDS = 0" O.C. OR 2x6 STUDS = 16" O.C. BALLON
PRAMED = 10" O.C. OR 2x6 STUDS = 16" O.C. BALLON
PRAMED = 10" O.C. OR 2x6 STUDS = 16" O.C. BALLON
PRAMED = 10" O.C. OR 2x6 STUDS = 16" O.C. BALLON

THESE PLANS ARE DESIGNED IN ACCORDANCE WITH ARCHITECTURAL, PLANS PROVIDED BY DR. HORTON COMPLETED/REVISED ON 6/12/20/8. IT IS THE RESPONSIBILITY OF THE CLIENT TO NOTIFY SUMMIT ENGINEERING, LABORATORY & TESTING, P.C. IF ANY CHANGES ARE MADE TO THE ARCHITECTURAL PLANS PROTOR TO CONSTRUCTION. SUMMIT ENGINEERING, LABORATORY & TESTING, P.C. CANNOT GLIARANTEE THE ADEQUACY OF THESE STRUCTURAL. PLANS WHEN USED WITH ARCHITECTURAL. PLANS WHEN USED LATED INFERENTLY.

| INSTALL ANY REQUIRED HOLDOWNS PER SECTION | R602.103 AND FIGURES R602.1045, R602.101, R602.108(1) AND R602.108(2) OF THE 2015 IRC

NOTE

WALL ABOVE. PROVIDE BLOCKING UNDER JOIST SUPPORTED LOAD BEARING WALL ABOVE. PROVIDE BLOCKING UNDER JOIST SUPPORTED LOAD BEARING WALL.

JOIST & BEAM SIZES SHOWN ARE MINIMUMS. BUILDER MAY INCREASE DEPTH FOR EASE OF CONSTRUCTION.

NOTE: MEMBER NOTED AS PRESSURE TREATED MAY BE FRAMED WITH NON-PRESSURE TREATED LUMBER PROVIDED THE ENTIRETY OF THE MEMBER IS WRAPPED TO PREVENT MOISTURE INTRUSION.

NOTE: REDUCE JOIST SPACING UNDER TILE FLOORS, GRANITE COUNTERTOPS AND/OR ISLANDS.

STRUCTURAL MEMBERS ONLY

ENGINEERING SEAL APPLIES ONLY TO STRUCTURAL COMPONENTS ON THIS DOCUMENT, SEAL DOES NOT INCLUDE CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, PROCEDURES OR SAFETY PRECAUTIONS. ANY DEVIATIONS OR DISCREPANCIES ON PLANS ARE TO BE BROUGHT TO THE IMMEDIATE ATTENTION OF SUMMIT ENGINEERING, LABORATORY & TESTING, P.C. FAILURE TO DO SO WILL VOID SUMMIT LIABILITY.


STRUCTURAL ANALYSIS BASED ON 2018 NCRC.

SECOND FLOOR FRAMING PLAN

SCALE: 1/4"=1"-0" ON 22"x34" OR 1/8"=1"-0" ON 11"x17"



KING STUD REQUIREMENTS ABOVE DO NOT APPLY TO PORTAL FRAMED OPENINGS

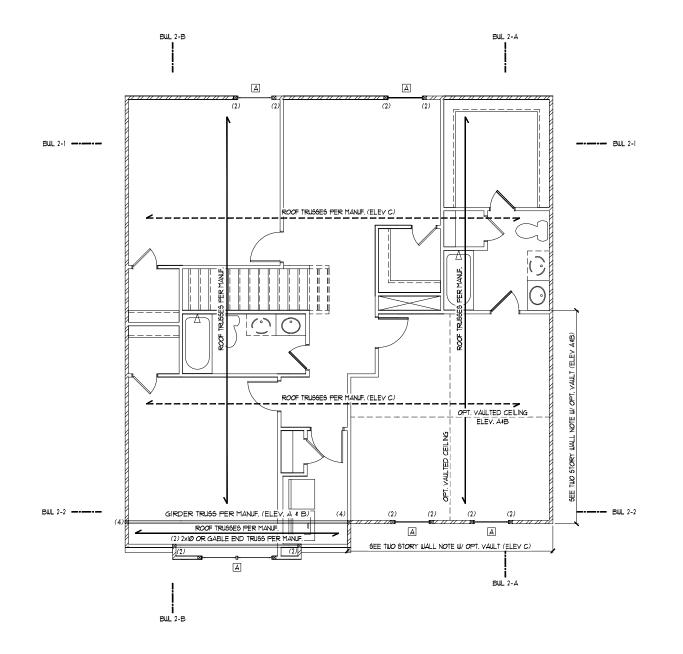

SECOND FLOOR FRAMING PLAN - ALL ELEVATIONS

SECOND FLOOR BRACING (FT)						
CONTIN	CONTINUOUS SHEATHING METHOD					
	REQUIRED PROVIDED					
BWL 2-1	5.6	30.0				
BWL 2-2	5.6	23.8				
BUL 2-A	5.1	36.0				
BWL 2-B	5.1	38.0				





DR Horton, Inc. 8001 Arrouridge Blv Charlotte, NC 28273

ProJECT:
Preduct - LH
Second Floor Framing Plan



PROJECT DATE
12504 01/21/2

CHECKED BY: WAJ

REFER TO COVER SHEET FOR A COMPLETE LIST OF REVISIONS

S4.Ø

THESE PLANS ARE DESIGNED IN ACCORDANCE WITH ARCHITECTURAL, PLANS PROVIDED BY DR HORTON COMPLETED/REVISED ON 6/12/208, IT IS THE RESPONSIBILITY OF THE CLIENT TO NOTIFY SUMMIT ENGINEERING, LABORATORY & TESTING, PC. IF ANY CHANGES ARE MADE TO THE ARCHITECTURAL PLANS PRIOR TO CONSTRUCTION. SUMMIT ENGINEERING, LABORATORY & TESTING, PC. CANNOT GLARANTEE THE ADEQUACY OF THESE STRUCTURAL. PLANS WHEN USED WITH ARCHITECTURAL PLANS DATED DIFFERENTLY THAN THE DATE LISTED ABOVE.

NOTE: 15T PLY OF ALL SHOWN GIRDER TRUSSES TO ALIGN WITH INSIDE FACE OF WALL (TYP, UNO)

NOTE: ROOF TRUSSES SHALL BE SPACE TO SUPPORT FALSE FRAMED DORMER WALLS (TYP, UNO)

STRUCTURAL MEMBERS ONLY

ENGINEERING SEAL APPLIES ONLY TO STRUCTURAL COMPONENTS ON THIS DOCUMENT, SEAL DOES NOT INCLUDE CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES, PROCEDURES OR SAFETY PRECAUTIONS. ANY DEVIATIONS OR DISCREPANCIES ON PLANS ARE TO BE BROUGHT TO THE IMMEDIATE ATTENTION OF SUMMIT ENGINEERING, LABORATORY & TESTING, P.C. FAILURE TO DO SO WILL VOID SUMMIT LIABILITY.

STRUCTURAL ANALYSIS BASED ON 2018 NCRC.

ROOF FRAMING PLAN SCALE: 1/4"=1'-0" ON 22"x34" OR 1/8"=1'-0" ON 11"x17"

V.9. TRUSSES


PER MANUF. OR
2x4 @ 24" O.C. w/
2x6 RIDGE 4
2x6 FLAT PLATE
VALLEYS 2X6 RAFTERS © 24" O.C. IIV
2X8 RIDGE AND FLAT PLATE
VALLEYS OR VALLEY SET TRUSSES
FER MANUF. GIRDER TRUSS PER MANUF. ROOF TRUSSES PER MANUF. - 2x6 RJ @ 24" O.C. w/ 2x8 RIDGE OR ROOF TRUSSES PER MANUF.

ROOF FRAMING PLAN - ELEVATION B





Plan . . Framing 1 PROJECT: Pinehurst - 1 ROOF



SCALE: 22x34 1/4":1"-0" lbdT 1/8":1"-0"

PROJECT 5 528-00R: 21851R DRAWN BY: EMB CHECKED BY: WAJ

REFER TO COVER SHEET FOR A COMPLETE LIST OF REVISIONS

Applicable Building Codes:

• 2018 North Carolina Residential Building Code with All Local Amendments

• ASCE 7-10: Minimum Design Loads for Buildings and Other Structures

9" -	ougos.		
٦.	Roof	Live Loads	
	1.1.	Conventional 2x	2Ø PSF
	1.2.	Trus s	2Ø PSF
		12.1. Attic Truss	60 PSF
2.	Roof	Dead Loads	
	2.1.	Conventional 2x	10 PSF
	2.2.	Truse	2Ø PSF
3.	Snow		15 PSF
	3.1.	Importance Factor	lø
4.	Floor	Live Loads	
	4.1.	Typ. Dwelling	40 PSF
		Sleeping Areas	
		Decks	
	4.4.	Passenger Garage	50 PSF

5. Floor Dead Loads
5.I. Conventional 2x ... 5.2 I-Joist

6.l. Exposure 62. Importance Factor... 63. Wind Base Shear

6.3.l. Vx =

632. Vy = T. Component and Cladding (in PSF)

MEAN ROOF HT.	UP T Ø 3Ø'	3 Ø'I"-35'	35'1"-40'	40'1"-45'
ZONE 1	16.7,-18.0	17.5,-18.9	18.2,-19.6	18.7,-20.2
ZONE 2	16.7,-21.0	17.5,-22.1	18.2,-22.9	18.7,-23.5
ZONE 3	16.7,-21.0	17.5,-22.1	18.2,-22.9	18.7,-23.5
ZONE 4	18.2,-19.0	19.2,-20.0	19.9,-2 Ø .7	20.4,-21.3
ZONE 5	18.2,-24.0	19.2,-25.2	19.9,-26.1	20.4,-26.9

Seismic Use Group ...

8.5. Spectral Response Acceleration 85.1. Sms = %g 85.2. Sml = %g 8.6. Seismic Base Shear

861.Vx = 862.Vy = 8.1. Basic Structural System (check one)

⊠ Bearing Wall ☐ Building Frame
☐ Moment Frame □ Dual w/ Special Moment Frame

□ Dual w/ Intermediate R/C or Special Steel
□ Inverted Pendulum

8.8. Arch/Mech Components Anchored 8.9. Lateral Design Control: Seismic 🗆 llind 🖂 9. Assumed Soil Bearing Capacity ...

STRUCTURAL PLANS PREPARED FOR

STANDARD DETAILS

PROJECT ADDRESS:

OUNER: DR Horton Carolinas Division

ARCHITECT/DESIGNER

These drawings are to be coordinated with the architectural, mechanical, plumbing, electrical, and civil drawings. This coordination is not the responsibility of the structural engineering of recoord (SER, Should any cliarcepancies become apparent, the contractor shall notify SUMMIT Engineering, Laboratory 4 Testing, P.C. before construction begins.

PLAN ABBREVIATIONS:

AB	ANCHOR BOLT	PT	PRESSURE TREATED
AFF	ABOVE FINISHED FLOOR	RS	ROOF SUPPORT
u	CEILING JOIST	5C	STUD COLUMN
CLR	CLEAR	SJ	SINGLE JOIST
DJ	DOUBLE JOIST	SPF	SPRUCE PINE FIR
DSP	DOUBLE STUD POCKET	SST	SIMPSON STRONG-TIE
EE	EACH END	SYP	SOUTHERN YELLOW PINE
EW	EACH WAY	TJ	TRIPLE JOIST
NTS	NOT TO SCALE	TSP	TRIPLE STUD POCKET
ОC	ON CENTER	TYP	TYPICAL
P S F	POUNDS PER SQUARE FOOT	UNO	UNLESS NOTED OTHERWISE
₽91	POUNDS PER SQUARE INCH	WWF	WELDED WIRE FABRIC

Roof truss and floor joist layouts, and their corresponding loading details, were not provided to SUMMIT Engineering, Laboratory 4 Testing, P.C. (SUMMIT) prior to the initial design. Therefore, truss and joist directions were assumed based on the information provided by <u>DR Horton. Inc.</u> Subsequent plan revisions based on roof truss and floor joist layouts shall be noted in the revision list, indicating the date the layouts were provided. Should any discrepancies become apparent, the contractor shall notify **5U**1111 immediately.

SHEET LIST:

REVISION LIST:

Date

FIII

T |2 |T

3 2.15.18

4 228.18

5 12.19.18

6 2.19.19

8 3.6.19

9 3220

Project No.

Revision

ôheet Nø.	Description
CSI	Cover Sheet, Specifications, Revisions
Dlm	Monolithic Slab Foundation Details
Dls	Stem Wall Foundation Details
Dlc	Crawl Space Foundation Details
Dlb	Basement Foundation Details
DIf	Framing Details

DR HORTON PROJECT SIGN-OFF:

Manager	Signature
Operations	
Operations System	
Operations Product Development	

SÜMMIT



GENERAL STRUCTURAL NOTES:

- NERAL STRUCTURAL NOTES:

 The design professional whose seal appears on these drawings is the structural engineer of record (SER) for this project. The SER bears the responsibility of the primary structural elements and the performance of this structure. No other party may revise, after, or delete any structural aspects of these construction documents without written permission of SUMMIT Engineering, Laboratory & Testing, P.C. (SUMMIT) or the SER. For the surposes of these construction documents the SER and SUMMIT. purposes of these construction documents the SER and SUMMIT
- shall be considered the same entity.

 The structure is only stable in its completed form. The contractor shall provide all required temporary bracing during construction
- to stabilize the structure.

 The SER is not responsible for construction sequences, methods, or techniques in connection with the construction of this structure. The SER will not be held responsible for the contractor's failure to conform to the contract documents
- should any non-conformities occur.

 Any structural elements or details not fully developed on the construction drawings shall be completed under the direction of a licensed professional engineer. These shop drawings shall be submitted to SUMMIT for review before any construction begins. The shop drawings will be reviewed for overall compliance as it relates to the structural design of this project. Verification of the shop drawings for dimensions, or for actual field conditions,
- the shop drawings for dimensions, or for actual field conditions, is not the responsibility of the SER or 9UMMIT. Verification of assumed field conditions is not the responsibility of the SER. The contractor shall verify the field conditions for accuracy and report any discrepancies to 9UMMIT before construction begins.

 The SER is not responsible for any secondary structural elements or non-structural elements, except for the elements specifically noted to the structural drawings.
- noted on the structural drawings.

 This structure and all construction shall conform to all
- applicable sections of the international residential code. This structure and all construction shall conform to all applicable sections of local building codes.
 All structural assemblies are to meet or exceed to requirements.
- of the current local building code.

FOUNDATIONS:

The structural engineer has not performed a subsurface investigation. Verification of this assumed value is the responsibility of the owner or the contractor. Should any adverse soil condition be encountered the SER must be

- 2. The bottom of all footings shall extend below the frost line for the region in which the structure is to be constructed. However, the bottom of all footings shall be a minimum of 12" below grade.
- maximum dry density.

 5. Excavations of footings shall be lined temporarily with a 6 mill polyetylene memorane if placement of concrete does not occur within 24 hours of excavation.

- with the American Institute of Steel Construction "Code of Standard Practice for Steel Buildings and Bridges" and the manual of Steel Construction "Load Resistance Factor Design latest editions.
 Structural steel shall receive one coat of shop applied
- rust-inhibitive paint.

 3. All steel shall have a minimum yield stress (F_u) of 36 kg unless
- otherwise noted

- Number IE.

 Concrete shall have a normal weight aggregate and a minimum compressive strength (fe/ at 28 days of 3000 ps), unless otherwise noted on the plan.

 Concrete shall be proportioned, mixed, and placed in
- Requirements for Reinforced Concrete" and ACI 301: "Specifications for Structural Concrete for Buildings".
- Air entrained concrete must be used for all structural elements exposed to freeze/thaw cycles and deicing chemicals. Air entrainment amounts (in percent) shall be within -1% to +2% of target values as follows:
 - 3.1. Footings: 5% 3.2. Exterior Slabs: 5%
- 4. No admixtures shall be added to any structural concrete without written permission of the SER.

- Construction" Any fill shall be placed under the direction or recomme
- of a licensed professional engineer.
 The resulting earl shall be compacted to a minimum of 95%
- No concrete shall be placed against any subgrade containing water, ice, frost, or loose material.

- STRUCTURAL STEEL:

 1. Structural steel shall be fabricated and erected in accordance

- Welding shall conform to the latest edition of the American weraing shall common to the latest edition of the American Welding Society's Structural Welding Code AUS DIJ. Electrodes for shop and field welding shall be class ETØXX. All welding shall be performed by a certified welder per the above

- accordance with the latest editions of ACI 318: "Building Code

- Concrete slabs-on-grade shall be constructed in accordance with ACI 302.IR-96: "Guide for Concrete Slab and Slab
 - The concrete slab-on-grade has been designed using a subgrade modulus of k=250 pci and a design loading of 200 psf. The SER is not responsible for differential settlement, slab cracking or other future defects resulting from urreported conditions not in accordance with the above assumptions. Control or solu cut joints shall be spaced in interior slabs-on-grade at a maximum of 15-01 O.C. and in exterior
 - slabs-on-grade at a maximum of $|\mathcal{O}|$ unless otherwise noted. Control or saw cut joints shall be produced using conventional process within 4 to 12 hours after the slab has been finished
 - process within 4 to 12 hours after the state has been has been intered.

 9. Reinforcing steel may extend through a control joint.

 Reinforcing steel may extend through a saw cut joint.

 10. All welded wire fabric (www.) for concrete slabs-on-grade shall be placed at mid-depth of slab. The WWW. shall be securely supported during the concrete pour.

- CONCRETE REINFORCEMENT:

 I. Fibrous concrete reinforcement, or fibermesh, specified in concrete slabs-on-grade may be used for control of cracking due to shrinkage and thermal expansion/contraction lowered water migration, an increase in impact capacity, increased abrasion resistance, and residual strength.
- Fibermesh reinforcing to be 100% virgin polypropylene fibers containing no reprocessed olefin materials and specifically manufactured for use as concrete secondary reinforcement.
- Application of fibermesh per cubic yard of concrete shall equal a minimum of 0.1% by volume (15 pounds per cubic yard) Fibermesh shall comply with ASTM CIII6, any local building code requirements, and shall meet or exceed the current industry
- standard.
 Steel reinforcing bars shall be new billet steel conforming to
- of the inferior of the state of size/spacing as the horizontal reinforcement with a class B
 - Lap reinforcement as required, a minimum of 40 bar diameters for tension or compression unless otherwise noted. Splices in masonry shall be a minimum of 48 bar diameters.

- 9. Where reinforcing dowels are required, they shall be equivalent in size and spacing to the vertical reinforcement. The dowel shall extend 48 bar diameters vertically and 20 bar diameters
- into the Footing.

 10. Where reinforcing steel is required vertically, dowels shall be provided unless otherwise nated. WOOD FRAMING: Solid sawn wood framing members shall conform to the specifications listed in the latest edition of the "National
- otherwise noted, all wood framing members are designed to be Spruce-Yellow-Pise (SYP) 2.

 LVL or PSL engineered wood shall have the following minimum

Design Specification for Wood Construction" (NDS), Unless

- sign values: 2.1. E = 1,900,000 psi
- 2.2. F_b = 2600 psi 2.3. F_v = 285 psi
- 2.4.Fc = 100 psi 1.4.1°C incorption blood in contract, masonry, or earth shall be pressure treated in accordance with AWPA standard C-15. All other moisture exposed wood shall be treated in accordance with AWPA standard C-2
- Nails shall be common wire nails unless otherwise noted.

 Lag screws shall confrom to ANSI/ASME standard Bi82.1-1981.

 Lead holes for lag screws shall be in accordance with NDS specification.
- specifications
- All beams shall have full bearing on supporting framing members unless otherwise noted. Exterior and load bearing stud walls are to be 2x4 SYP $^{\circ}$ 2 = 16"
- O.C. unless otherwise noted. Studs shall be continuous from the sole plate to the double top plate. Studs shall only be discontinuous at headers for window/door openings. A minimum of one king stud shall be placed at each end of the header.
- of one king stud shall be placed at each end of the header. King stude shall be continuous, individual stude forming a column shall be attached with one lod nail e 6" O.C. staggered. The stud column shall be continuous to the foundation or beam. The column shall be properly blocked at all floor levels to ensure proper load transfer. Multi-ply beams shall have each ply attached with (3) lod nails e
- 10. Flitch beams, 4-ply beams and 3-ply side loaded beams shall be bolted together with (2) rous of 1/2" diameter through boilts staggered # 16" O.C. unless noted otherwise. Min. edge distance shall be 2" and (2) bolts shall be located a min. 6" from each

WOOD TRUSSES:

The wood truss manufacturer/fabricator is responsible for the design of the wood trusses. Submit sealed shop drawings and supporting calculations to the SER for review prior to fabrication. The SER shall have a minimum of five (5) days for review. The review by the SER shall review for overall compliance with the design documents. The SER shall assume no responsibility for the correctness for the structural design for the wood trusses.

The wood trusses shall be designed for all required loadings.

dded box bay detail (2/D2f). Added deck

stem wall and crawl space foundations

Revised garage door detail, NC only

Added high-wind foundation details

Revised per Mecklenburg County Comments Revised stem wall deck attachment and roo

Corrected dimensions at perimeter footings

Revised stem wall insulation note

Revised per 2018 NCRC

sheathing on wall sections.

Added tall turndown detail

options with basement. Revised deck options with

- In a wood trusses shall be designed for all required loadings as specified in the local building code, the AGCE Standard "Minimum Design Loads for Buildings and Other Structures."

 (ASCE 1-05), and the loading requirements shown on these specifications. The truss drawings shall be coordinated with all other construction documents and provisions provided for loads shown on these drawings including but not limited to HVAC equipment, piping, and architectural fixtures attached to
- the trusses shall be designed, fabricated, and erected in accordance with the latest edition of the "National Design Specification for Wood Construction" (NDS) and "Design Specification for Metal Plate Connected Wood Trusses."
- The truss manufacturer shall provide adequate bracing information in accordance with "Commentary and Recommendations for Handling, Installing, and Bracing Metal Plate Connected Wood Trusses" (HIB-91). This bracing, both temporary and permanent, shall be shown on the shop drawings.

 Also, the shop drawings shall show the required attachments for
- the trusses.

 Any chords or truss webs shown on these drawings have been shown as a reference only. The final design of the trusses shall be per the manufacturer

EXTERIOR WOOD FRAMED DECKS:

Decks are to be framed in accordance with local building codes and as referenced on the structural plans, either through code references or construction details.

- WOOD STRUCTURAL PANELS:

 I. Fabrication and placement of structural wood sheathing shall be in accordance with the APA Design/Construction Guide "Residential and Commercial," and all other applicable APA
- All structurally required wood sheathing shall bear the mark of

- 3. Wood wall sheathing shall comply with the requirements of local building codes for the appropriate state as indicated on these drawings. Refer to wall bracing notes in plan set for more information. Sheathing shall be applied with the long direction perpendicular to framing, unless noted otherwise. Roof sheathing shall be APA rated sheathing exposure I or 2.
- Roof sheathing shall be continuous over two supports and attached to its supporting roof framing with (1)-8d CC nail at 6"o/c at panel edges and at 12"o/c in panel field unless otherwise noted on the plans. Sheathing shall be applied with the long direction perpendicular to framing. Sheathing shall have a span rating consistent with the framing spacing. Use
- have a span rating consistent with the framing spacing, Use suitable edge support by use of plywood clips or limber blocking unless otherwise noted. Panel end joints shall occur over framing. Apply building paper over the sheathing as required by the state Building Code. Wood floor sheathing shall be APA rated sheathing exposure I or 2. Attach sheathing to its supporting framing with (I)-Bd CC ringshark nail at 6°0'c at panel edges and at 12°0'c in panel field unless otherwise noted on the plans. Sheathing shall be applied perpendicular to framing, Sheathing shall have a span rating consistent with the framing spacing. Use suitable edge support by use of 14G plywood or lumber blocking unless otherwise noted. Panel end joints shall occur over framing. Apply building paper over the sheathing as required by the state Building Code.
- state Building Code.

 Sheathing shall have a 1/8" gap at panel ends and edges as recommended in accordance with the APA.

- STRUCTURAL FIBERBOARD PANELS:

 1. Fabrication and placement of structural fiberboard sheathing shall be in accordance with the applicable AFA standards
- All structurally required fiberboard sheathing shall bear the mark of the AFA. 3. Fiberboard wall sheathing shall comply with the requirements of local building codes for the appropriate state as indicated on these drawings. Refer to wall bracing notes in plan set for more
- Sheathing shall have a 1/8" gap at panel ends and edges are


PROJECT:
Standard Details
Coversheet TH CARO USBA1 4/2 STRUCTURAL MEMBERS ONLY


DATE: 3/2/2 8CALE: 22x34 V4"+1"-8" lbt1 V8"+1"-8" PROJECT 1 P-19Ø1-1Ø DRAWN BY: LAG

CHECKED BY: WAJ

REFER TO COVER SHEET FOR A COMPLETE LIST OF REVISIONS

CSI

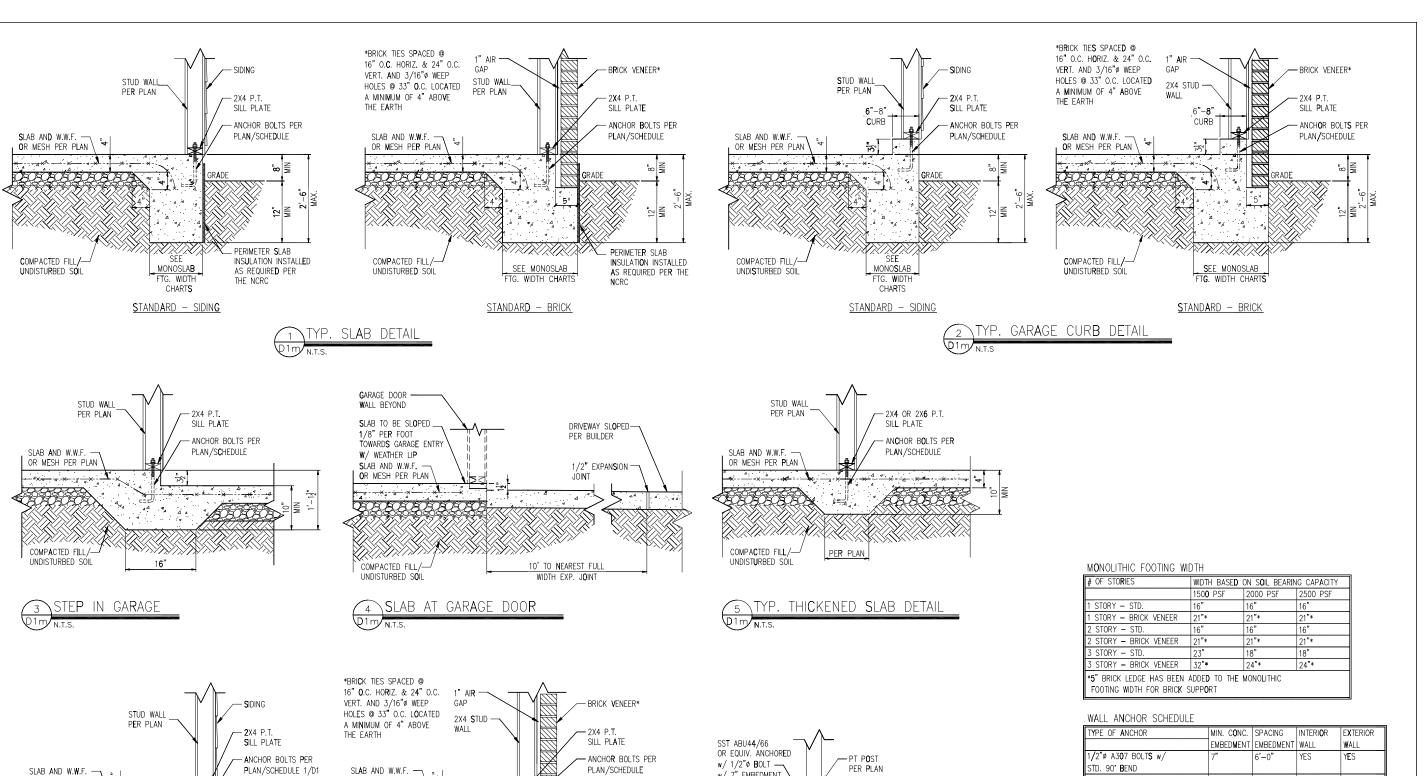

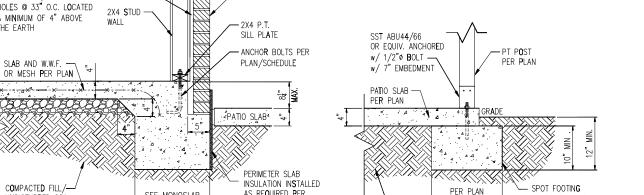

AS REQUIRED PER

THE NCRC

<u>STANDARD - BRICK</u>

SEE MONOSLAB

FTG. WIDTH CHARTS

PATIO SLAB DETAIL

UNDISTURBED SOIL

- PATIO SLAB⁴

SEE

MONOSI AF

FTG WIDTH

CHARTS

STANDARD - SIDING

- PERIMETER SLAB

THE NCRC

I**n**sulati**o**n inst**a**lled

AS REQUIRED PER

OR MESH PER PLAN

COMPACTED FILL/-

UNDISTURBED SOIL

6A COVERED PATIO DETAIL

- COMPACTED FILL/

UNDISTURBED SOIL

OR CONTINUOUS

LUG FOOTING PER PLAN

_	WALL ANGION SOFILBULL				
	TYPE OF ANCHOR	MIN. CONC.	SPACING	INTERI O R	EXTERIOR
I		EMBED M ENT	EMBEDMENT	WALL	WALL
I	1/2"ø A3 0 7 BOLT S w/	7"	6'-0"	YES	YES
	STD. 90° BEND				
ı	S\$T - MAS	4"	5'-0"	NO	YES
ı	HILTI KWIK BOLT KBI 1/2-2-3/4	2-1/4"	6'-0"	YES	NO
ı	1/2"ø HILTI THREADED ROD	7"	6'-0"	YES	YES
	w/ HIT HY150 ADHESIVE				

NOTE: INSTALL ALL ANCHORS 12" MAX. FROM ALL BOTTOM PLATE ENDS AND JOINTS.

- NOTES: 1. REFER TO GENERAL NOTES & SPECIFICATIONS ON COVERSHEET FOR ADDITIONAL INFORMATION.
- PROVIDE 6 MIL VAPOR BARRIER UNDER ALL SLABS-ON-GRADE.
 SEE ARCH. DWGS. FOR ALL TOP OF THE SLAB ELEVATIONS, SLOPES AND DEPRESSIONS.
- 4. REFER TO STRUCTURAL PLANS AND FRAMING DETAILS FOR BRACED WALL PANEL LAYOUT, DIMENSIONS, ATTACHMENT AND CONNECTIONS
- REFER TO LOCAL AND STATEWIDE CODES FOR ADDITIONAL AMENDMENTS AND REQUIREMENTS NOT SHOWN
- 6. PERIMETER INSULATION SHOWN AS REQUIRED BY LOCAL CLIMATE ZONE. INSTALL PER TABLE N1102.1.2 OF THE 2018 NCRC







Details Foundation Slab PROJECT:
Standard Details


Monolithic \$



DATE: 3/2/2 8CALE: 27x34 1/4"+1"-**8"** 18x1 1/8":1"-**8"** PROJECT & P-19Ø1-1ØR DRAWN BY: LAG CHECKED BY: WAJ

REFER TO COVER SHEET FOR A COMPLETE LIST OF REVISIONS

Dlm

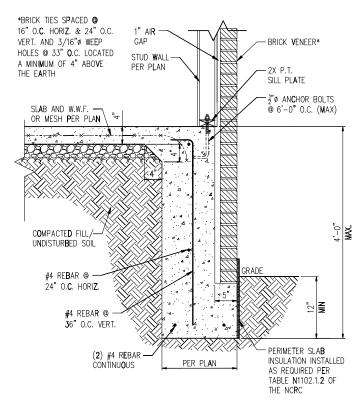

- NOTES:


 1. REFER TO GENERAL NOTES & SPECIFICATIONS ON COVERSHEET FOR ADDITIONAL INFORMATION.
 - PROVIDE 6 MIL VAPOR BARRIER UNDER ALL SLABS-ON-GRADE.
 SEE ARCH. DWGS. FOR ALL TOP OF THE SLAB ELEVATIONS, SLOPES AND DEPRESSIONS.
 - 4. REFER TO STRUCTURAL PLANS AND FRAMING DETAILS FOR BRACED WALL PANEL LAYOUT, DIMENSIONS, ATTACHMENT AND CONNECTIONS
 - 5. REFER TO LOCAL AND STATEWIDE CODES FOR ADDITIONAL AMENDMENTS AND REQUIREMENTS NOT SHOWN
 - 6. PERIMETER INSULATION SHOWN AS REQUIRED BY LOCAL CLIMATE ZONE. INSTALL PER TABLE N1102.1.2 OF THE 2018 NCRC





Details Foundation Slab PROJECT:
Standard Details

Monolithic (




DATE: 3/2/28 8CALE: 22x34 1/4"+1-**6"** lbt1 1/8"+1-**6"** PROJECT 4 P-19Ø1-1Ø

CHECKED BY: WAJ

DRAWN BY: LAG

REFER TO GOVER SHEET FOR A COMPLETE LIST OF REVISIONS

D2m

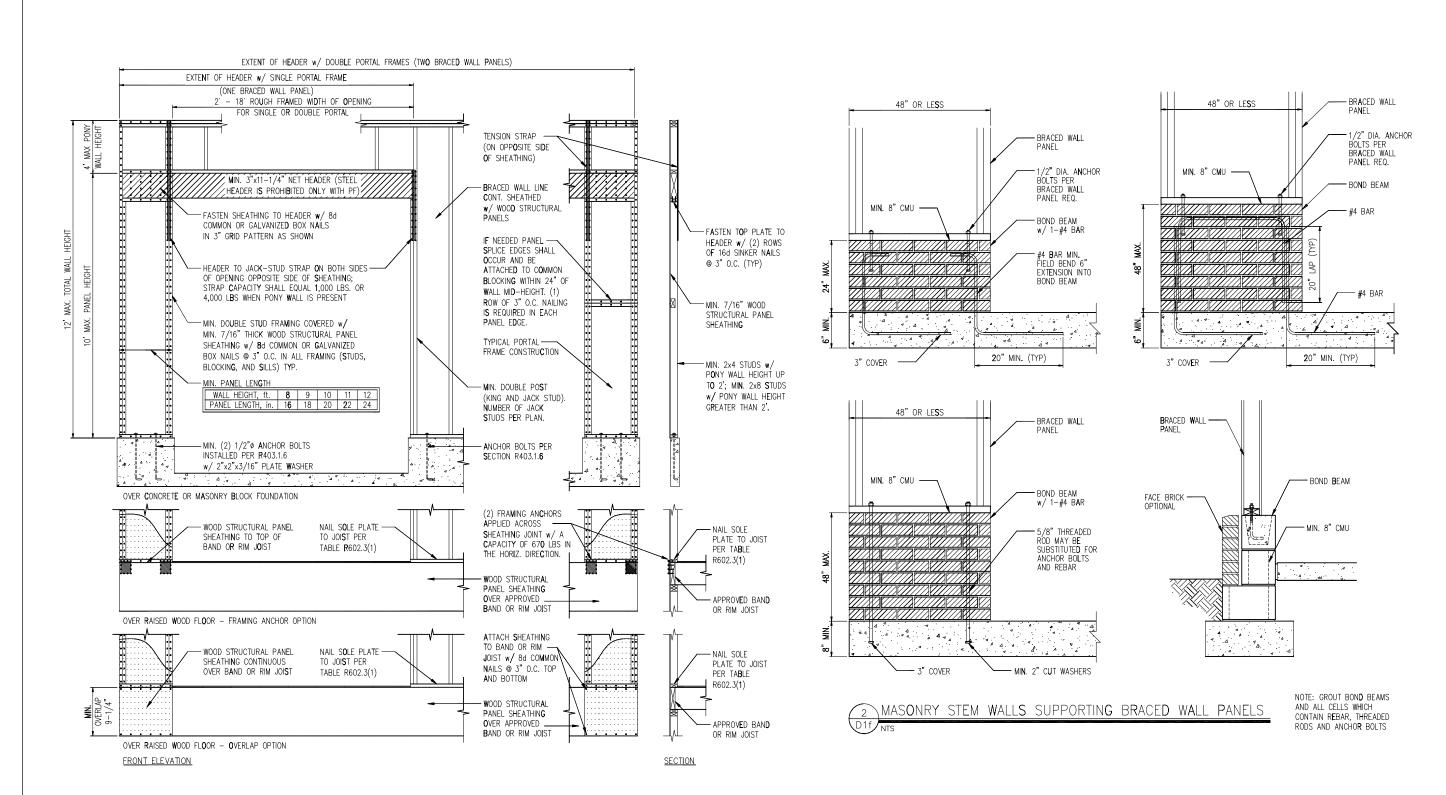



SÜMMIT

SUMMIT Engineering, Laboratory & Testing, P.C.

CLIENT:
DR Horton Carolina Divi
8001 Arrowridge Blvd.
Charlotte, NC 20213




DATE: 3/2/2 8CALE: 22x34 1/4"∗1"-**8"** |bgT 1/8"∗1"-**8"** PROJECT 4 P-19Ø1-1Ø DRAIN BY: LAG CHECKED BY: WAJ

REFER TO GOVER SHEET FOR A COMPLETE LIST OF REVISIONS

D1f

METHOD PF: PORTAL FRAME DETAIL

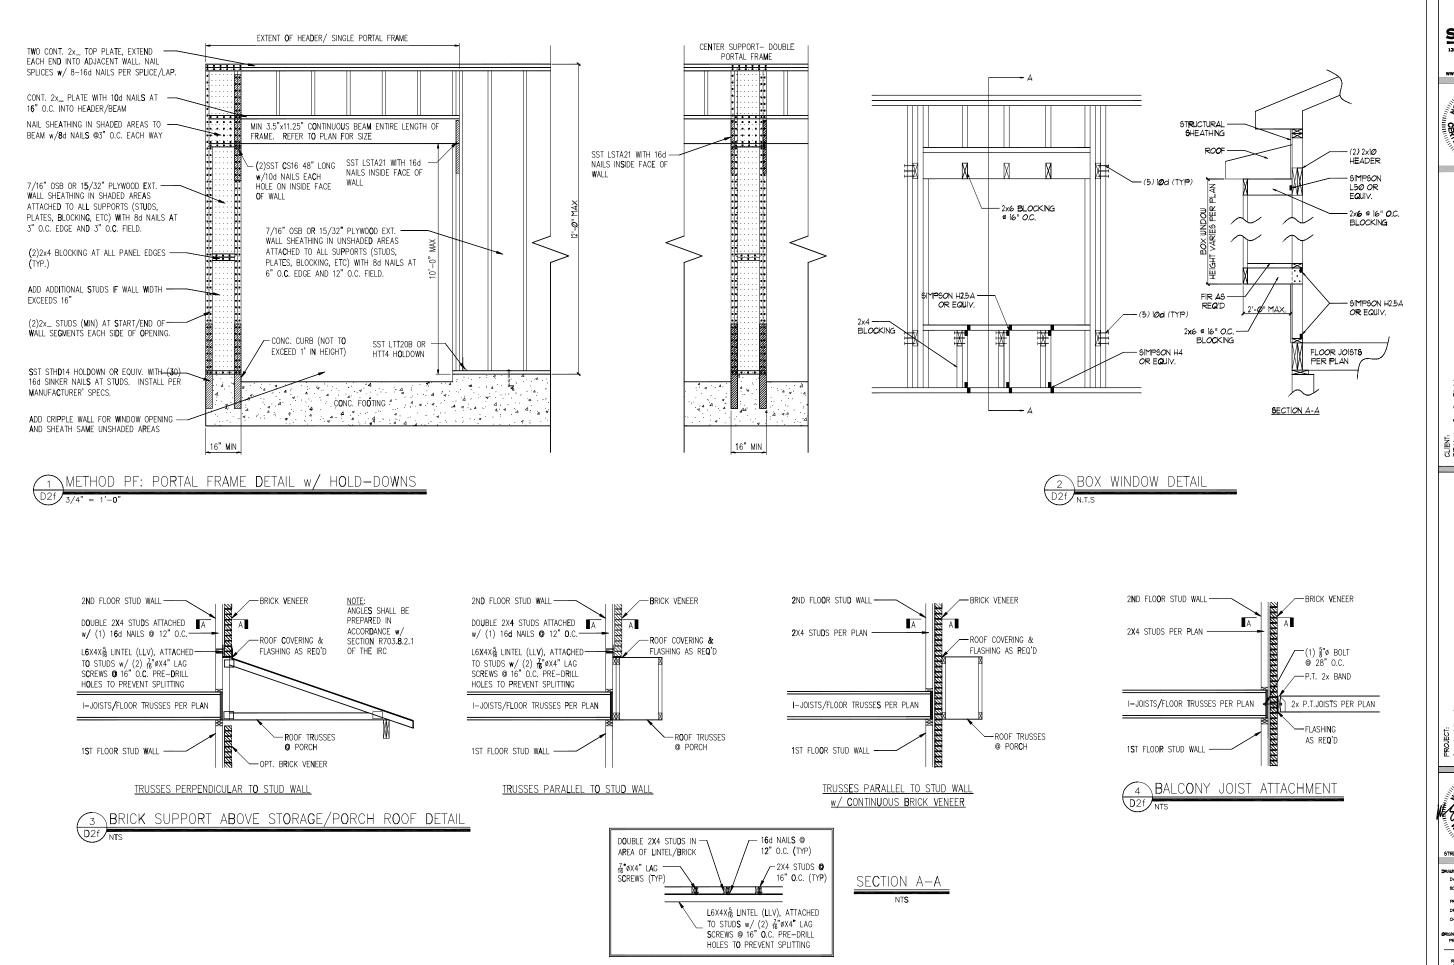

SUMMIT





Detaí PROJECT: Standard Details Framing




STRUCTURAL MEMBERS ONLY DATE: 3/2/2 8CALE: 22x34 1/4"∗1"-**8"** |bgT 1/8"∗1"-**8"**


PROJECT & P-19Ø1-1ØR DRAWN BY: LAG CHECKED BY: WAJ

REFER TO GOVER SHEET FOR A COMPLETE LIST OF REVISIONS

D2f

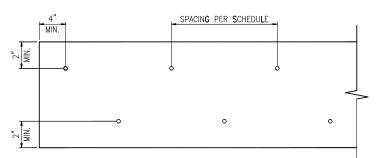

ELEVATION VIEW

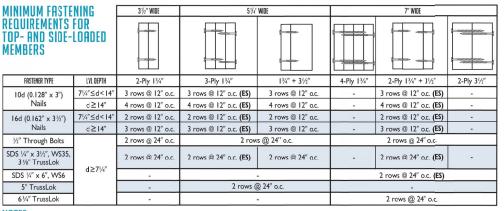

- I.All fasteners must meet the minimum requirements in the table above. Side-loaded multiple-ply members must meet the minimum fastening and side-loading capacity
- requirements given on page 48.

 2. Minimum fastening requirements for depths less than 7½" require special consideration. Please contact your technical representative.

L3x3x1/4"x8-1/2" LONG -

STEEL BEAM -

PER PLAN

COPE END OF STEEL

AS REQ'D TO CLEAR

WEB OF STEEL BEAM

LINTEL BOTH SIDES OF WEB

w/ 13/16" # HOLES @ GAGE

side are to be staggered up to one-hall the o.c. spacing, but maintaining the fastene-clearances above and

(3) if "ES" is referenced, then the fastener schedule must be repeated on each side, with the fasteners on the back side offset up to one-half the o.c. spacing of the front side (whether or not it is staggered).

SECTION VIEW

STEEL BEAM

PER PLAN

- STEEL BEAM PER PLAN

(2) 3/4"ø BOLTS

ÈACH ANGLE LEG

NOTES: 3. Three general rules for staggering or offsetting for a certain fastener schedule:

(1) if staggering or offsetting is not referenced, then none is required;

(2) if staggering is referenced, ther fasteners installed in adjacent rows on the front.

MULTI-PLY BEAM CONNECTION DETAIL


— 10d COMMON NAIL @ 12" O.C.


- SIMPSON C\$16 COIL STRAP OR EQUIV. PER MANUF. SPECIFICATIONS

EACH PLY OR PER CODE


@ 1/3 HEIGHT LOCATIONS

MULTI-PLY STUD CONNECTION DETAIL

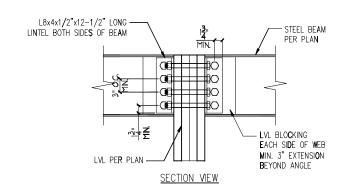

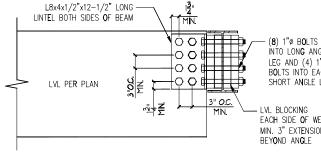


ELEVATION VIEW

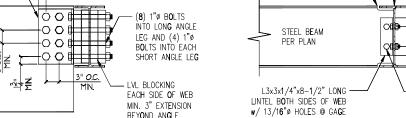





ELEVATION VIEW



GABLE ROOF RETURN

SÜMMIT

SUMMIT LEDGE OF THE OF T


PROJECT: Standard Details Framing Details



DATE: 3/2/2 8CALE: 22x34 1/4"∗1"-**6"** lbt1 1/8"∗1"-**6"** PROJECT 4 P-1907-10R DRAIIN BY: LAG CHECKED BY: WAJ


REFER TO COVER SHEET FOR A COMPLETE LIST OF REVISIONS

D3f

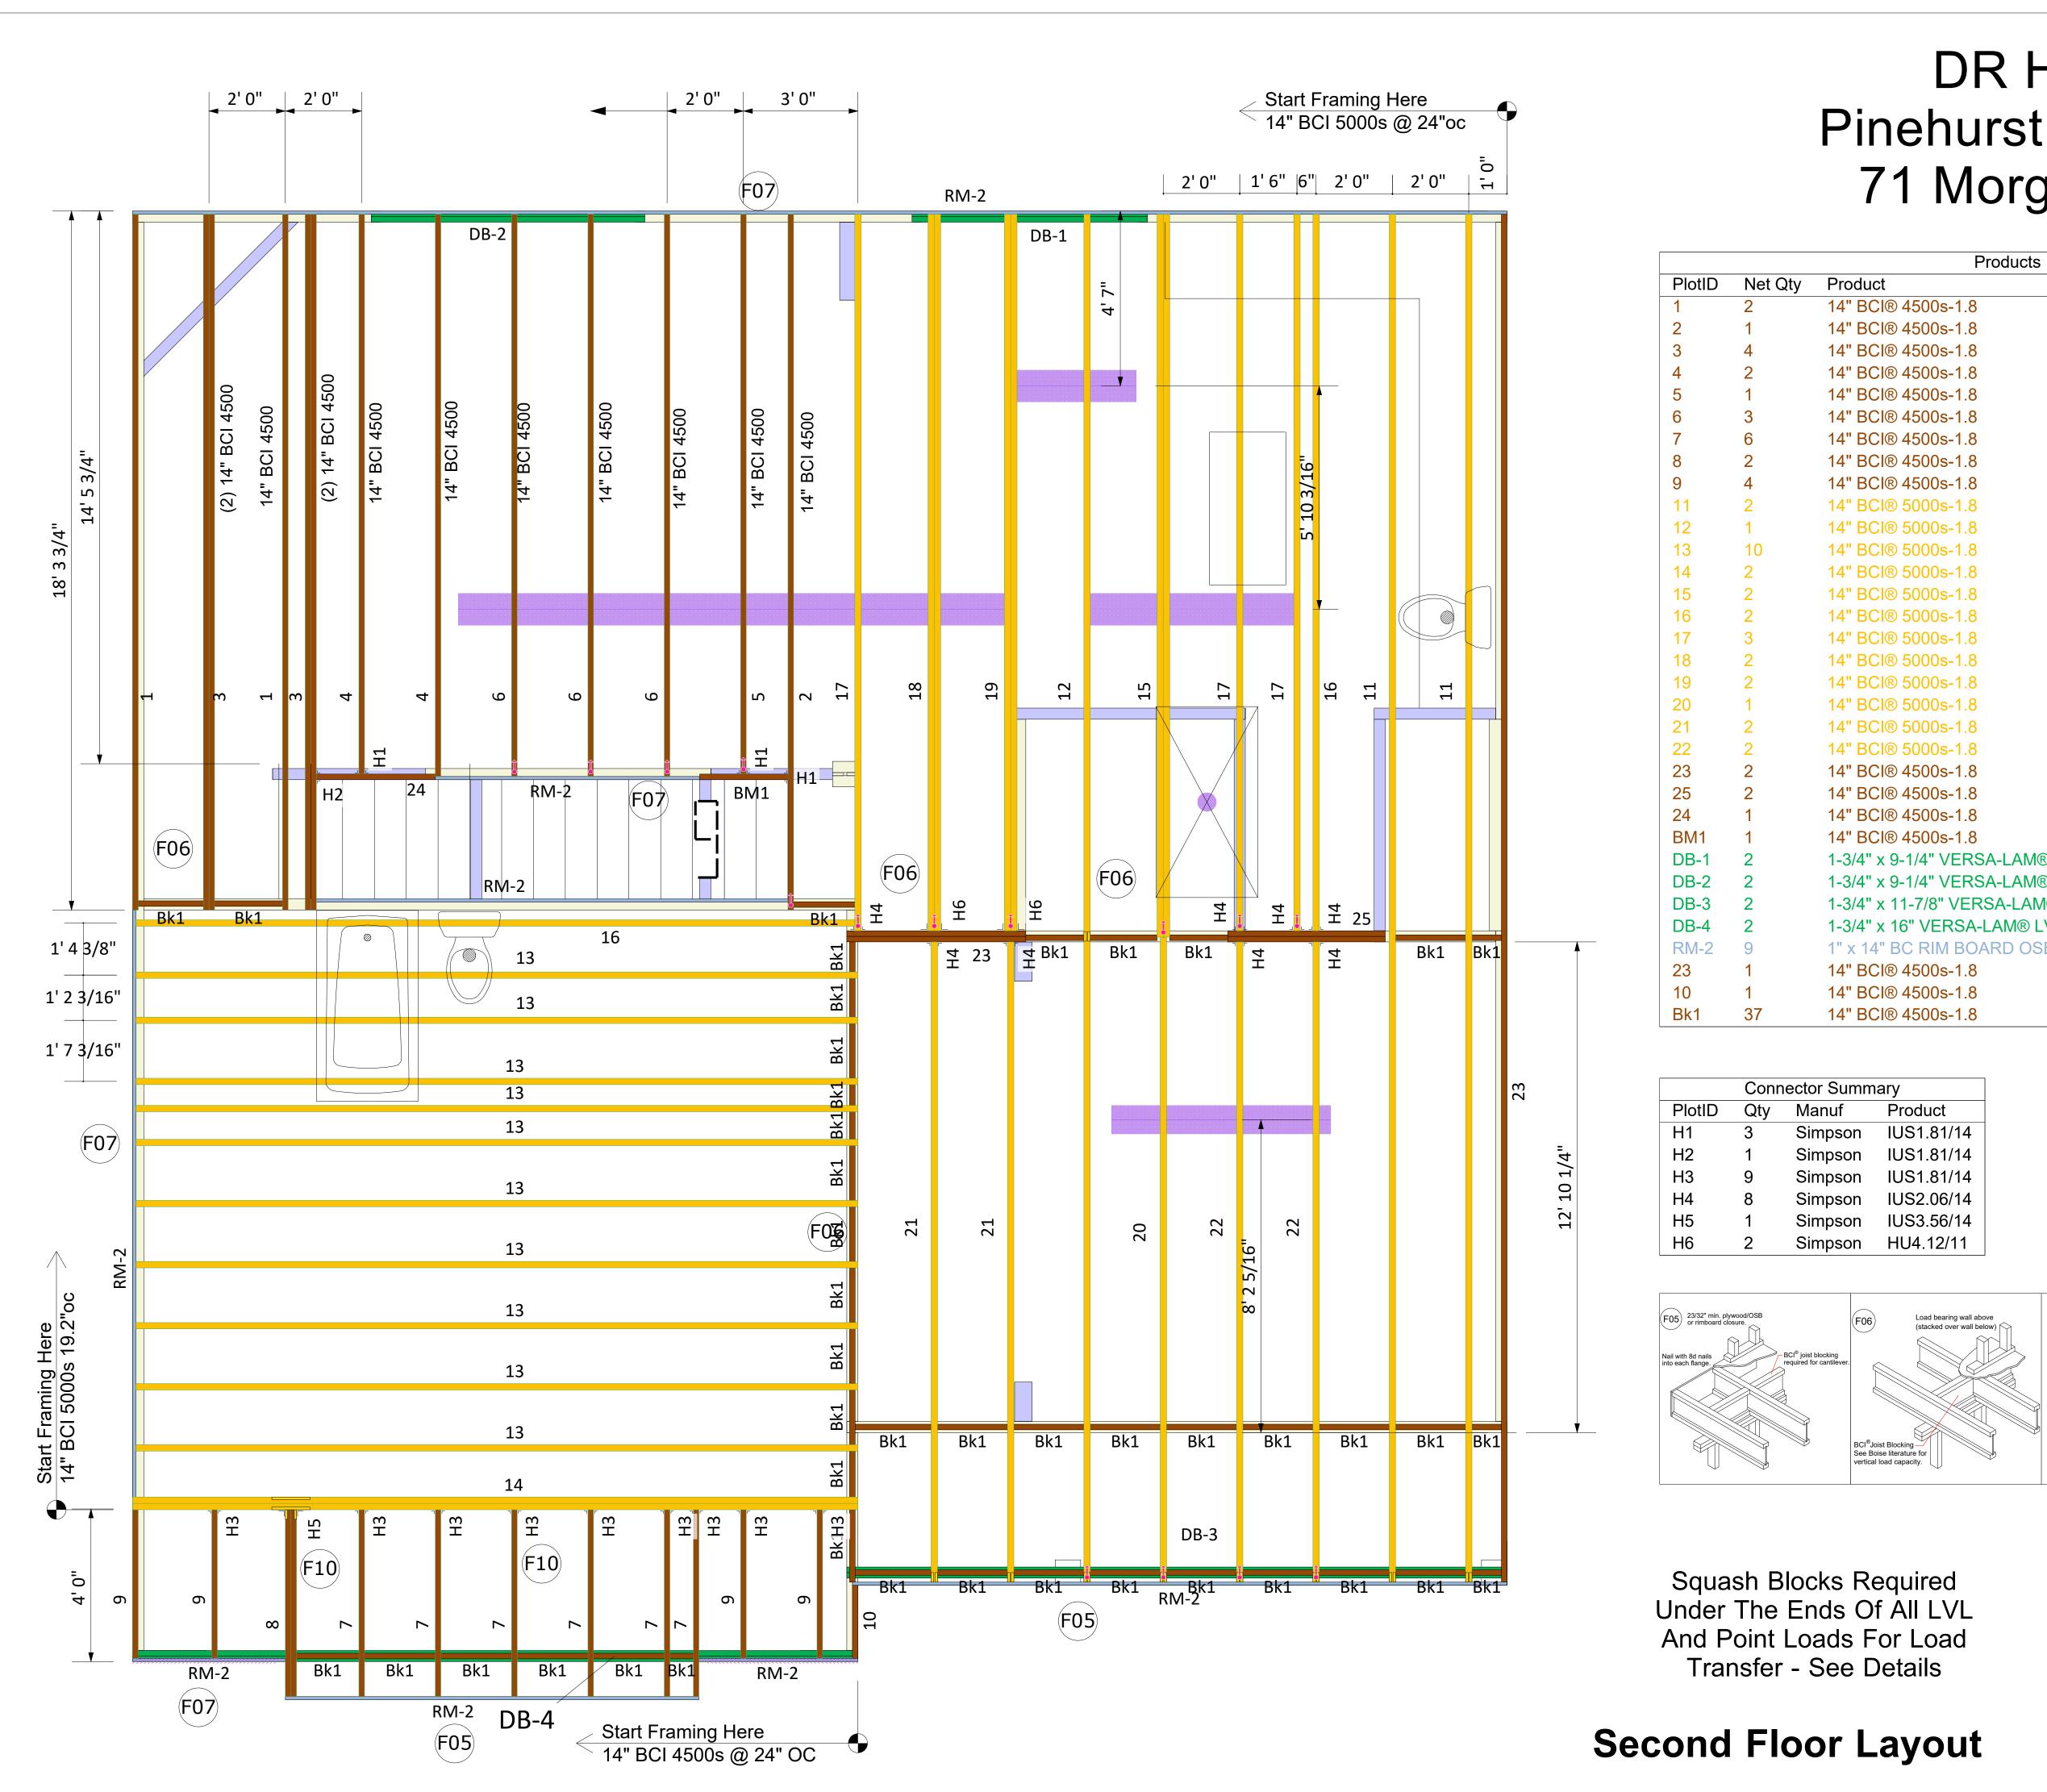

DR Horton Pinehurst B LH Slab 71 Morgan North

Products						
PlotID	Net Qty	Product	Length	Plies		
1	2	14" BCI® 4500s-1.8	19' 0"	1		
2	1	14" BCI® 4500s-1.8	19' 0"	1		
3	4	14" BCI® 4500s-1.8	19' 0"	2		
4	2	14" BCI® 4500s-1.8	15' 0"	1		
5	1	14" BCI® 4500s-1.8	15' 0"	1		
6	3	14" BCI® 4500s-1.8	15' 0"	1		
7	6	14" BCI® 4500s-1.8	6' 0"	1		
8	2	14" BCI® 4500s-1.8	6' 0"	2		
9	4	14" BCI® 4500s-1.8	5' 0"	1		
11	2	14" BCI® 5000s-1.8	36' 0"	1		
12	1	14" BCI® 5000s-1.8	36' 0"	1		
13	10	14" BCI® 5000s-1.8	20' 0"	1		
14	2	14" BCI® 5000s-1.8	20' 0"	2		
15	2	14" BCI® 5000s-1.8	20' 0"	2		
16	2	14" BCI® 5000s-1.8	19' 0"	1		
17	3	14" BCI® 5000s-1.8	19' 0"	1		
18	2	14" BCI® 5000s-1.8	19' 0"	2		
19	2	14" BCI® 5000s-1.8	19' 0"	2		
20	1	14" BCI® 5000s-1.8	18' 0"	1		
21	2	14" BCI® 5000s-1.8	17' 0"	1		
22	2	14" BCI® 5000s-1.8	17' 0"	1		
23	2	14" BCI® 4500s-1.8	5' 0"	2		
25	2	14" BCI® 4500s-1.8	5' 0"	2		
24	1	14" BCI® 4500s-1.8	4' 0"	1		
BM1	1	14" BCI® 4500s-1.8	3' 0"	1		
DB-1	2	1-3/4" x 9-1/4" VERSA-LAM® LVL 2.1E 3100 SP	8' 0"	2		
DB-2	2	1-3/4" x 9-1/4" VERSA-LAM® LVL 2.1E 3100 SP	8' 0"	2		
DB-3	2	1-3/4" x 11-7/8" VERSA-LAM® LVL 2.1E 3100 SP	18' 0"	2		
DB-4	2	1-3/4" x 16" VERSA-LAM® LVL 2.1E 3100 SP	20' 0"	2		
RM-2	9	1" x 14" BC RIM BOARD OSB	12' 0"	1		
23	1	14" BCI® 4500s-1.8	36' 0"	1		
10	1	14" BCI® 4500s-1.8	3' 0"	1		
Bk1	37	14" BCI® 4500s-1.8	2' 0"	1		

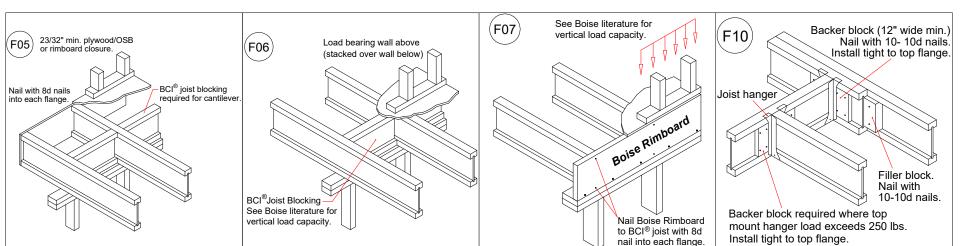

All I-Joist and Versa-Lam Beams Must be Installed per The Boise Cascade Installation Guide!




84 Lumber company Charlotte. North Carolina **DR Horton** Pinehurst B LH Slab

BC FRAMER II Scale: NTS = 1'-0 Date: 6/28/2019 Designer: GO File:Pinehurst B LH Slab

DWG:05-17-2021

Sheet: 1/1

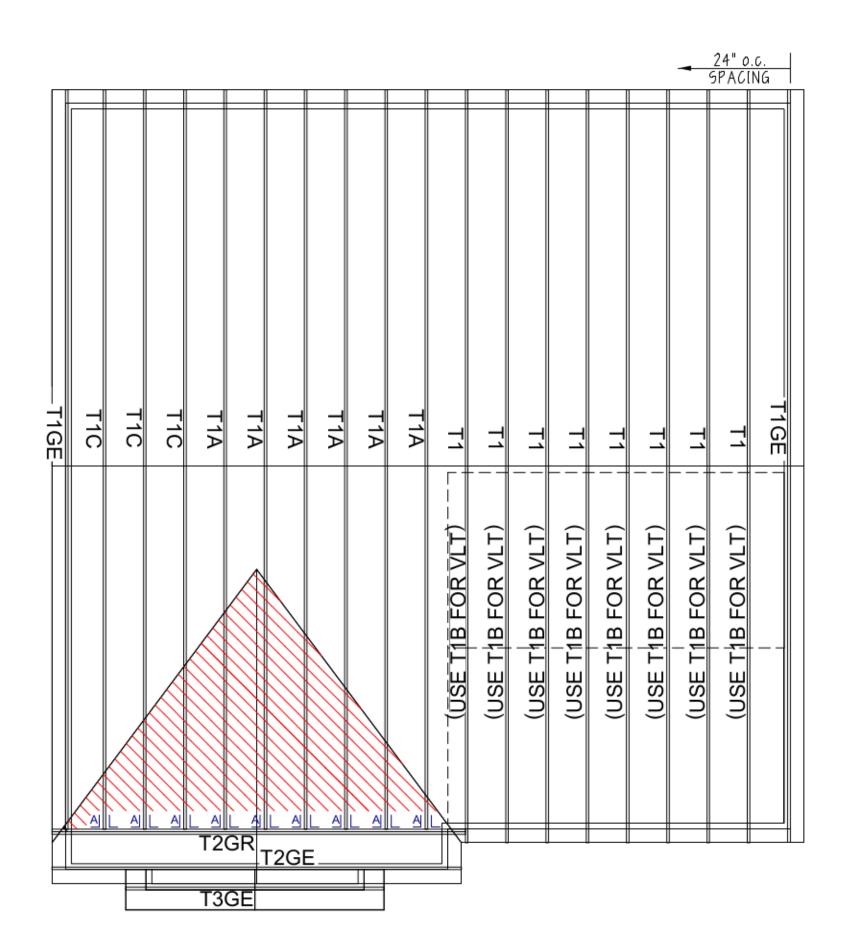

1) FOLLOW SIMPSONS INSTALLATION RECOMMENDATIONS FOR HANGER CONNECTIONS.

2) VERIFY ALL BUILDING DIMENSIONS PRIOR TO TRUSS ERECTION.

4) SEE DETAIL SHEETS PROVIDED IN THE TRUSS PACKAGE FOR INSTALLATION INFORMATION CONCERNING PIGGY-BACK AND/OR HINGE-PLATE TRUSSES.

5) SHADED AREAS TO BE FRAMED IN FIELD.

3) EXTERIOR DIMENSIONS ARE FROM OUT TO OUT OF SHEATHING UNLESS NOTED OTHERWISE.

INTERIOR BEARING WALL

*		Manufacture Communication		DEDICATED TO QUALITY AND EXC
SING) PSF	0 PSF	0 PSF	PSF

Ž	MODEL:	PINE	PINEHURST B FLAT & VLT ROOF	T ROOF
ŏ	COMMUNITY:			LOT#:
Ś	SCALE:	NOT TO SCALE SHIP DATE:	SHIP DATE: -	PO#:
CELLENCE DATE:	ATE:	3/28/11	LAST REV.:	#OM
10 10 7-2558	TOURN 48072 DESIGNED BY	BY: RWD	DRAWN BY: RWD	REG214

& 215