


Highland Grove 4-Bedroom Septic Proposal Lot #1

*If plumbing is not sufficient
a separate pump and tank may
be required.

System: Gravity to D-Box.
Lines: 5-7 (345')
0.35 LTAR
24" Trench Bottom
Accepted Status System
System: Pump to serial dist.
Lines: 1-4 (345')
0.35 LTAR
24" Trench Bottom
Accepted Status System

①
37,171 SQ.FT.

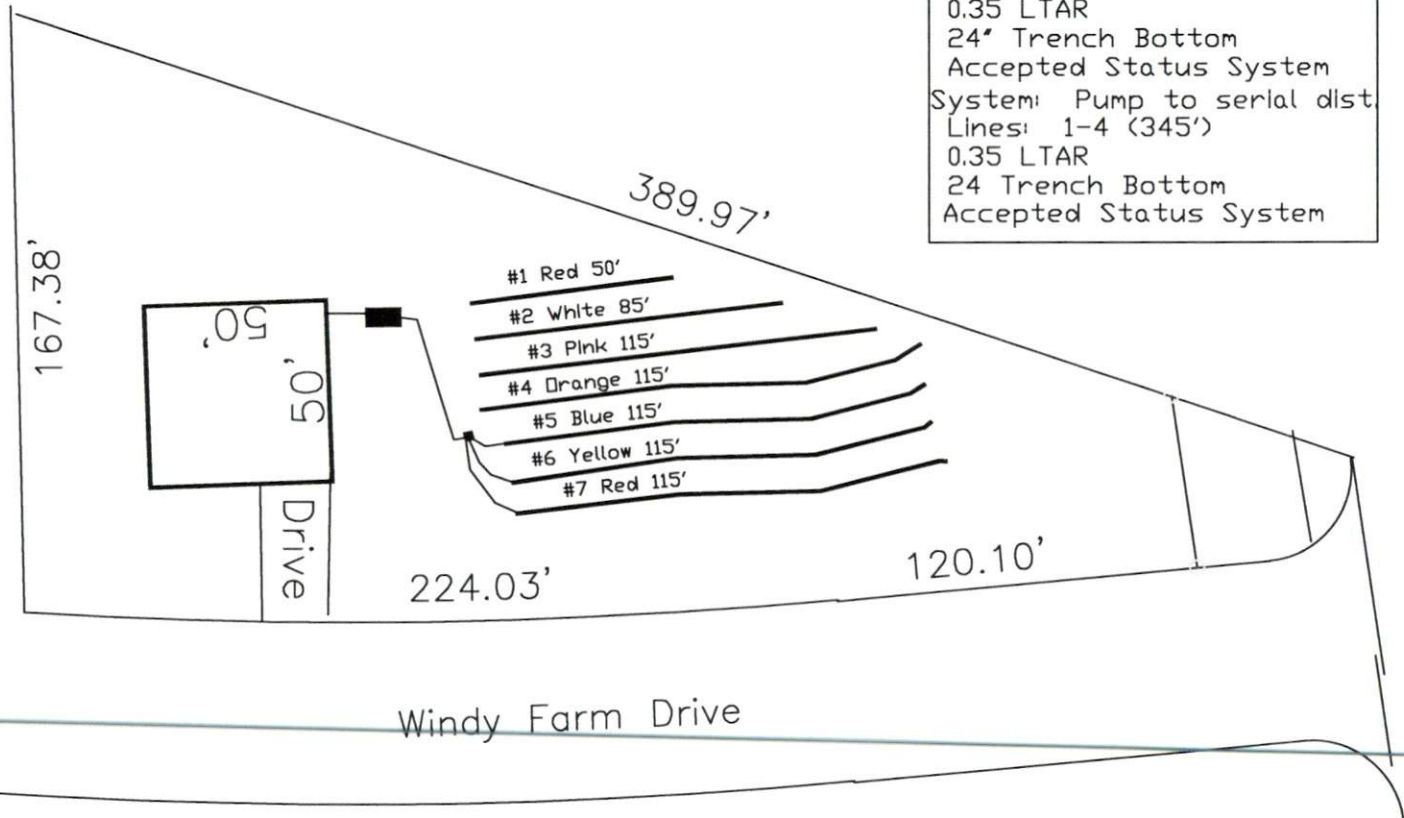

GRAPHIC SCALE
1" = 50'



This drawing represents a
preliminary septic plan made prior
to final construction activities.
A revised plan may need to be
reworked at time of permitting.

Adams
Soil Consulting
919-414-6761
Job #561