
## Harnett County Department of Public Health

## Improvement Permit

A building permit cannot be issued with only an Improvement Permit PROPERTY LOCATION: 20 Walker Grove Ln. - Matthews Road (SR ISSUED TO: True Homes LLC SUBDIVISION Walker Grove NEW X REPAIR EXPANSION Site Improvements required prior to Construction Authorization Issuance: Type of Structure: 59x40 sfd, 3 beds 2.5 baths Proposed Wastewater System Type: 25% Reduction Sys. Projected Daily Flow: 360 Number of bedrooms: 3 Number of Occupants: 6 Basement Yes May be required based on final location and elevations of facilities Pump Required: XYes No Type of Water Supply: Community Public Well Distance from well NA feet X Five years Permit valid for: No expiration Permit conditions: 07/23/2021 Date: The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit. Construction Authorization (Required for Building Permit) The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958 and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout. ISSUED TO: True Homes LLC PROPERTY LOCATION: 20 Walker Grove Ln. - Matthews Road ( SUBDIVISION Walker Grove Facility Type: 59x40 sfd, 3 beds 2.5 bat New Expansion Basement Fixtures? Yes No Basement? Yes × No AT-GRADE 25% AZDOCTION (Initial) Wastewater Flow: 360 GPD Type of Wastewater System\*\* (See note below, if applicable 1) Number of trenches Installation Requirements/Conditions Trench Spacing: 9 Feet on Center
Soil Cover: 6 inches (Import) Septic Tank Size 1000 gallons Exact length of each trench 55 Pump Tank Size 1000 gallons Trenches shall be installed on contour at a Maximum Trench Depth of: 12 (Maximum soil cover shall not excee inches (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) Pump Requirements: ft. TDH vs. \_\_ inches below pipe Aggregate Depth: NA inches above pipe Conditions: PUMP TO MESSIUM D-BOX EQUAL DISTRIBUTION WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. \*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit. Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This SEE ATTACHED SITE SKETCH Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. Authorized State Agent: Construction Authorization Expiration Date: 67/23/2020 ANDRAW CURSIN

## Harnett County Department of Public Health Site Sketch

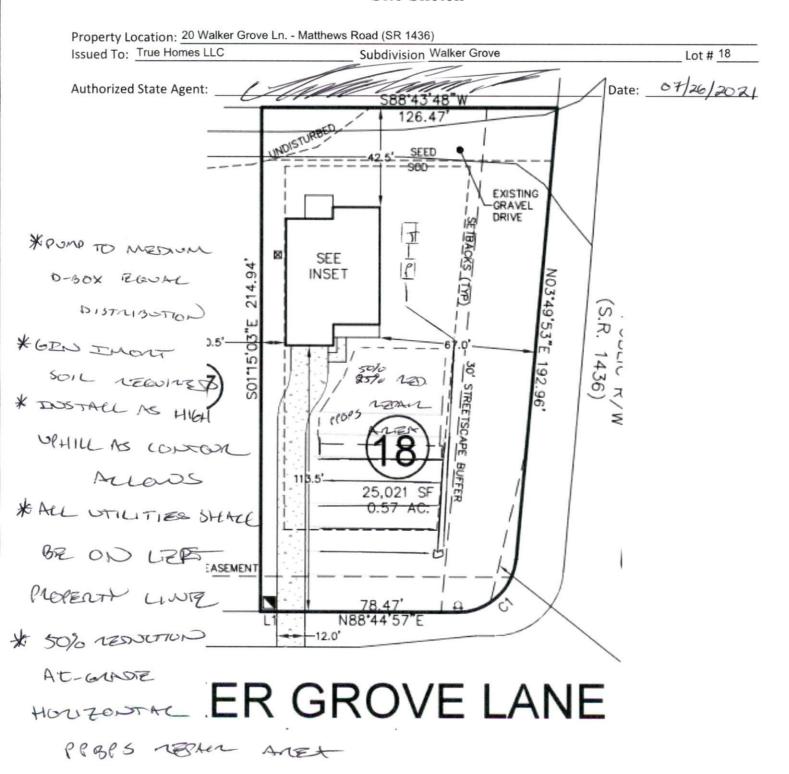

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.