Harnett County Department of Public Health


Improvement Permit

A building permit cannot be issued with only an Improvement Permit

PROPERTY LOCATION: 42 Walker Grove Ln. - Matthews Road (SR

ISSUED TO: True Homes LLC SUBDIVISION	Walker Grove
NEW REPAIR EXPANSION ■	Site Improvements required prior to Construction Authorization Issuance:
Type of Structure: 46x34 sfd, 4 beds 2.5 baths	
Proposed Wastewater System Type: 25% Reduction Sys.	
Projected Daily Flow: 480 GPD	
Number of bedrooms: 4 Number of Occupants: 8max	
Basement Yes X No	
Pump Required: No May be required based on final location and el	
Type of Water Supply: Community Public Well Distance from well	
Permit conditions:	No expiration
Authorized State Agent:: Date:	07/28/2021 SEE ATTACHED SITE SKETCH
The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The per	1/39/2003
site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not	
the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.	
	1.1.2
<u>Construction</u> A	uthorization
(Required for Bu	ilding Permit)
The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958. and .1959	are incorporated by references into this permit and shall be met. Systems shall be installed in accordance
with the attached system layout.	
ISSUED TO: True Homes LLC PROPER	TY LOCATION: 42 Walker Grove Ln Matthews Road (
	SION Walker Grove LOT # 17
Facility Type: 46x34 sfd, 4 beds 2.5 bat New Exp	
Basement? Yes No Basement Fixtures? Yes No	—
Type of Wastewater System** AT-GLADE 25% 120	CCTON (Initial) Wastewater Flow: 48 GPD
(See note below, if applicable)	(initial) Wastewater 110W.
AT-GADE 25% NEONLYON	(Repair)
Installation Requirements/Conditions Number of trenches 4	
Septic Tank Size 1000 gallons Exact length of each trench	· ·
Pump Tank Sizegallons	
Maximum Trench Depth of:	1 101110
(Trench bottoms shall be leve	1 to +7-174 36 above the trench bottom)
in all directions)	• VA := t t-
Pump Requirements:ft. TDH vsGPM	inches below pipe
6 H	Aggregate Depth: inches above pipe
Conditions: GAAVIT TO D-BOX TERWAL OF	STRIBUTION NA inches total
WITTE LINES (INCLUDING IDDICATION) AND DE ACT. COOK AND DECE	CERTIC CUCTELL OR DEPLIE LIPE
WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF	SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.	
**If applicable: I understand the system type specified is different from the type speci	rified on the application. I accept the specifications of this permit.
	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
Owner/Legal Representative Signature:	Date:
This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes.	truction Authorization shall not be transferred when there is a change in ownership of the site. This
Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment	CEC ANTICUED CITE CHETCH
1111	
Authorized State Agent:	Date: 67/23/2021
	orization Expiration Date: $07/23/202C$
ANDREW CURLIN Construction Auth	Ultration Expiration Date.

Harnett County Department of Public Health Site Sketch

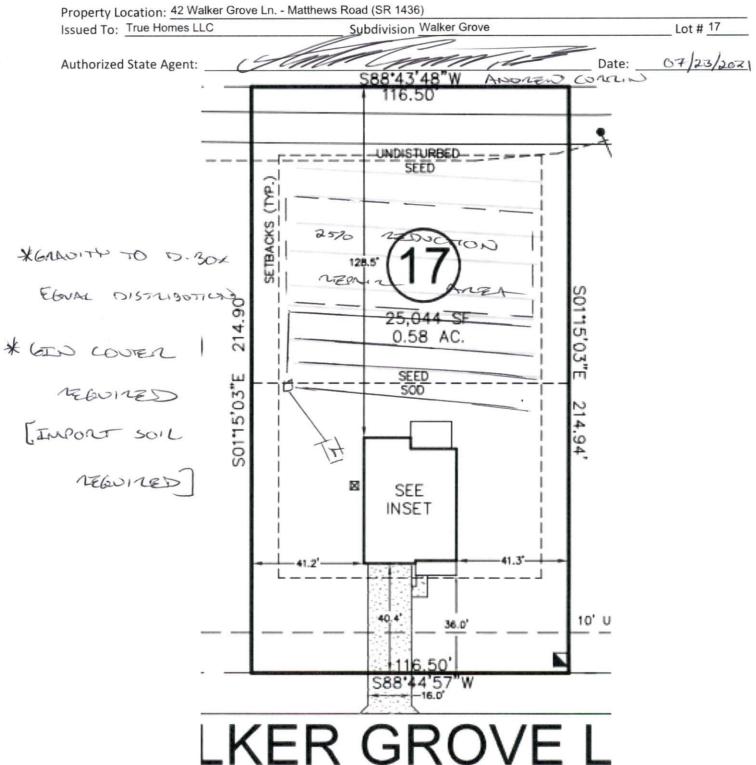

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.