

SOUTHEASTERN SOIL & ENVIRONMENTAL ASSOC., INC.

PROPOSED SUBSURFACE WASTE DISPOSAL SYSTEM DETAIL SHEET

SUBDIVISION: BALLANO WOODS

LOT 115

INITIAL SYSTEM: APPROVED 25% REDUCTION

REPAIR APPROVED 25% REDUCTION

DISTRIBUTION: SERIAL

DISTRIBUTION SERIAL

BENCHMARK: 100.0

LOCATION FC 114/115

NO. BEDROOMS: 3

LTAR 0.8 GPD / FT<sup>2</sup>

<u>LINE</u>	<u>FLAG COLOR</u>	<u>ELEVATION</u>	<u>LENGTH</u>
1 2A	R	89.30	80'
	Y	88.50	40'
			<u>120'</u>
2B	Y	88.50	40'
3	R	87.20	80'
			<u>120'</u>

Initial system

BY M. FAUER

DATE 8/14/21

TYPICAL PROFILE (MOST LIMITING)

- 0-46 S/L (VF, Wg)
- 46-48 SLL (Fi, sbl)
- cr > 48"

THERE SHALL BE NO GRADING, CUTTING, LOGGING OR OTHER SOIL DISTURBANCE IN SEPTIC AREA


HEALTH DEPARTMENT USE ONLY.

INSTALL AT 18" LEFT SIDE (FACING) DESIGNS DO NOT GUARANTEE FUNCTIONALITY  
WILL BE AT 24" RIGHT SIDE (FACING)

# Southeastern Soil & Environmental Associates, Inc.

P.O. Box 9321  
Fayetteville, NC 28311  
Phone/Fax (910) 822-4540  
Email mike@southeasternsoil.com

BALLARD WOODS  
LOT 115  
PROPOSED SEPTIC  
LAYOUT

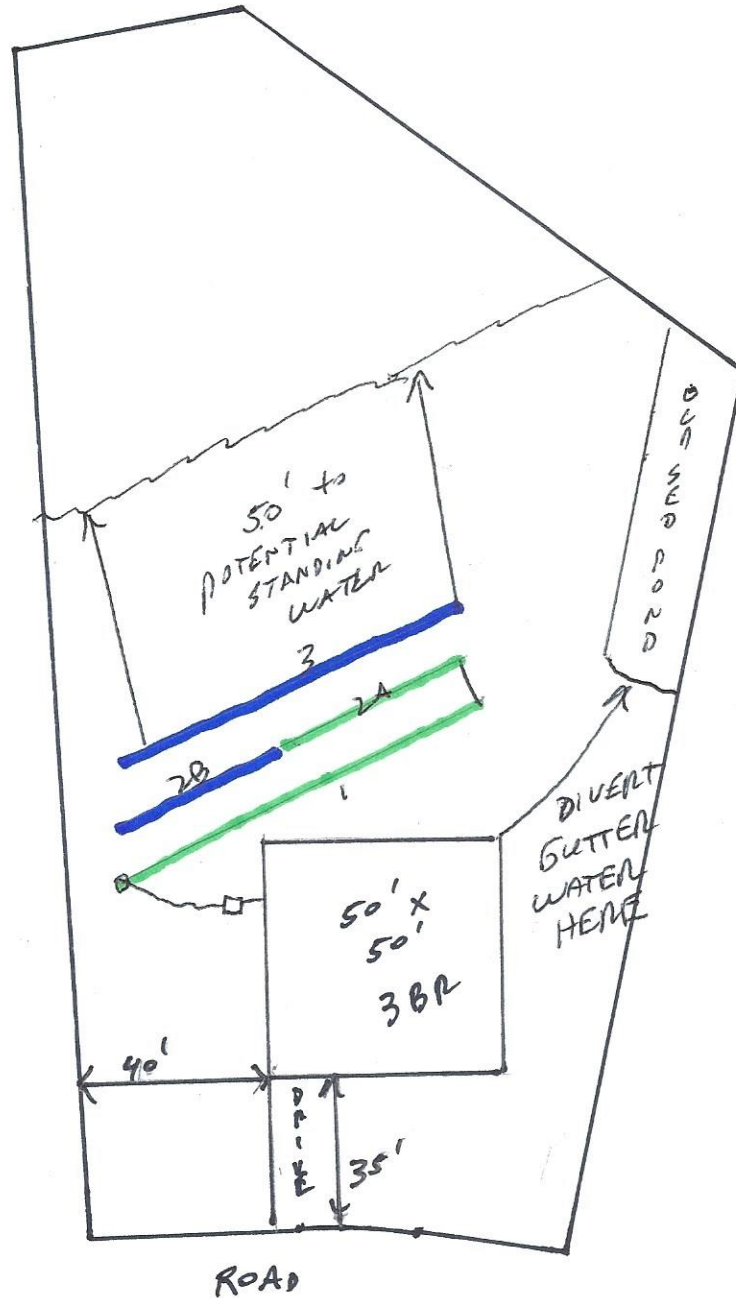

1" = 40'