

Harnett County Department of Public Health

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

PROPERTY LOCATION: 660 Jasmine Road (SR 1461)

ISSUED TO: Red Door Homes of Central Carolina, SUBDIVISION Captains Landing Blk 12 LOT # 13

NEW REPAIR EXPANSION Site Improvements required prior to Construction Authorization Issuance:

Type of Structure: 54x39 4 beds 3 baths

Proposed Wastewater System Type: 25% Reduction Sys.

Projected Daily Flow: 480 GPD

Number of bedrooms: 4 Number of Occupants: 8 max


Basement Yes No

Pump Required: Yes No May be required based on final location and elevations of facilities

Type of Water Supply: Community Public Well Distance from well NA feet

Permit valid for: Five years No expiration

Permit conditions: _____

Authorized State Agent:  Date: 12/06/2021 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Red Door Homes of Central Carolii PROPERTY LOCATION: 660 Jasmine Road (SR 1461)

SUBDIVISION Captains Landing Blk 12 LOT # 13

Facility Type: 54x39 4 beds 3 baths New Expansion Repair

Basement? Yes No Basement Fixtures? Yes No

Type of Wastewater System** 25% Reduction System (Initial) Wastewater Flow: 480 GPD

(See note below, if applicable 50% Reduction PPBPS System (Repair))


Installation Requirements/Conditions	Number of trenches <u>5</u>	
Septic Tank Size <u>1000</u> gallons	Exact length of each trench <u>75</u> feet	Trench Spacing: <u>9</u> Feet on Center
Pump Tank Size _____ gallons	Trenches shall be installed on contour at a	Soil Cover: <u>8</u> inches
	Maximum Trench Depth of: <u>20</u> inches	(Maximum soil cover shall not exceed
	(Trench bottoms shall be level to +/-1/4"	36" above the trench bottom)
	in all directions)	
Pump Requirements: _____ ft. TDH vs. _____ GPM		Aggregate Depth: <u>NA</u> inches below pipe
		<u>NA</u> inches above pipe
Conditions: <u>Gravity to D-Box Equal Distribution Required</u>		<u>NA</u> inches total

WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent:  Date: 12/06/2021

Andrew Curran Construction Authorization Expiration Date: 12/06/2026

Application # SFD2107-0050


Harnett County Department of Public Health Site Sketch

Property Location: 660 Jasmine Road (SR 1461)

Issued To: Red Door Homes of Central Carolina, LLC Subdivision Captains Landing Blk 12 Lot # 13

Authorized State Agent: *Andrew Corbin* Date: 12/06/2021
ANDREW CORBIN

- * GRAVITY TO D-BOX EQUAL DISTRIBUTION REQUIRED
- * MEDIUM D-BOX MAY BE REQUIRED FOR FIVE (5) POTS
- * INSTALL AS HIGH UPHILL AS CONTOUR ALLOWS

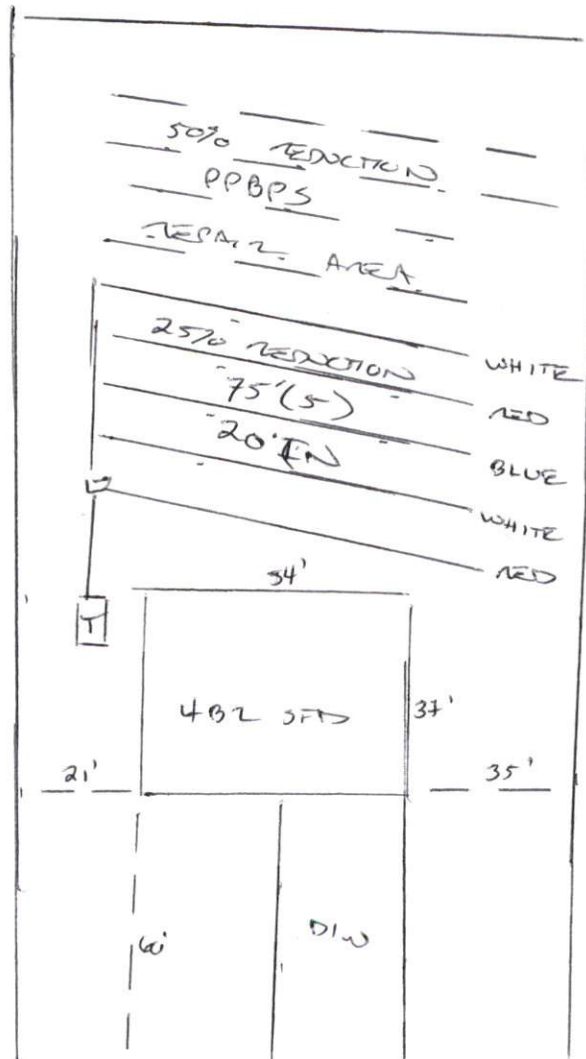

← JASMINE ROAD (SR 1461) →

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.