


THIS IS A TRUSS PLACEMENT PLAN (TPP). NOT AN ENGINEERED DOCUMENT. Trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See individual truss design drawings (TD's) for each truss design identified on the TPP. The Contractor is responsible for the temporary bracing of the roof and floor system, and requirements for the permanent restanchoring of truss systems may be met by following the methods outlined in AISI-11-1-004 - 2.2.2. The design of the support structure including but not limited to headers, beams, walls, and columns is the responsibility of the building designer. For general guidance regarding installation and loading, consult Component Safety Information (CSI) available from the SBC Association (www.sbcassociation.com). It is the responsibility of the General Contractor to verify that the provided component layout matches the final intended construction plans, loading conditions, and use. If they do not, it is the responsibility of the General Contractor to notify UFP and provide plans containing the latest specifications and designs. UFP will not be responsible for plan changes by others after final approval of shop drawings, or for errors or modifications made on-site during construction. DO NOT CUT, NOTCH, DRILL, OR OTHERWISE REPAIR MANUFACTURED TRUSSES IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION BY A LICENSED PROFESSIONAL DESIGNATED BY UFP. The Contractor is responsible to verify all dimensions, including adjusting member spacing within tolerances to allow for the drop and use of plumb/hvac, unless noted otherwise. Truss-to-wall connections, if shown, are for uplift only and do not consider lateral loads. All connections on this project are to be installed per the connector manufacturer's specifications. All connectors shown that are not truss-to-truss are suggestions only and are to be verified by the Building Designer or Engineer of Record for suitability to this particular project. UFP accepts no responsibility for the specific application or suitability of any connector that is not truss-to-truss as they apply to this specific structure.

ROOF TRUSS PLACEMENT PLAN

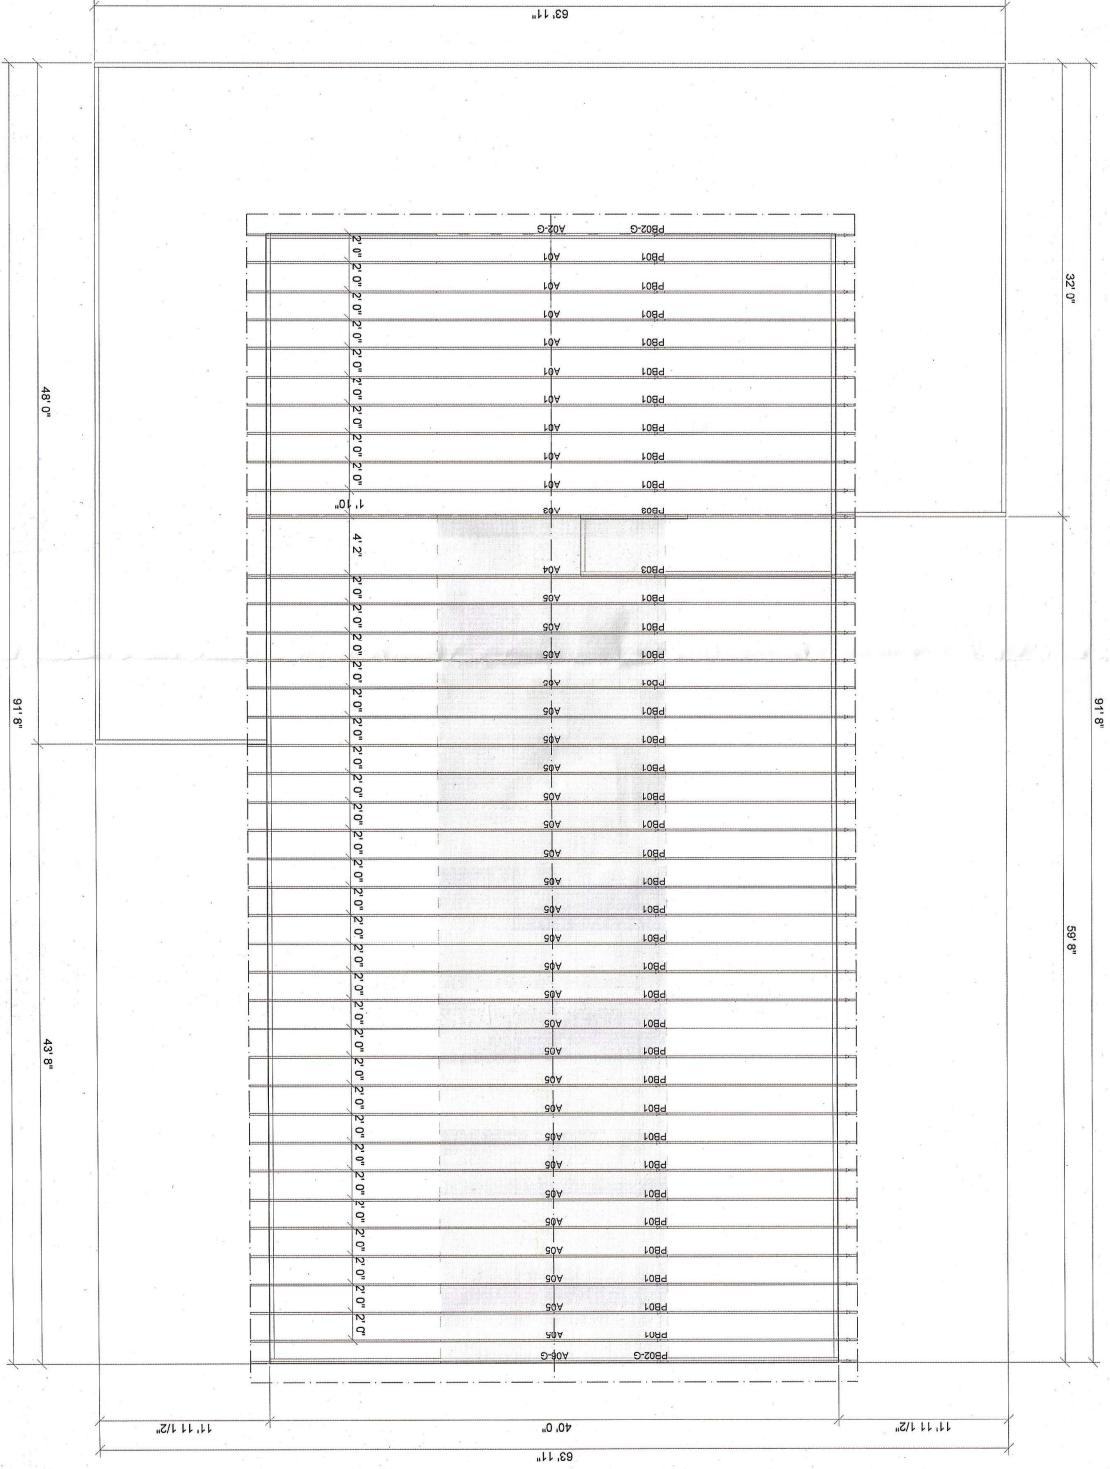

ROOF AREA:	4066.89 ft² sqft
RIDGE LINE:	82.33 ft
VALLEY LINES:	0 ft
HIP LINES:	0 ft

DESIGNER: WFP
LAYOUT DATE: 3-18-25
ARCH DATE:
STUD DATE:
JOB #: 2501289

REVISIONS	DATE	DESCRIPTION	BY
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			

LONESTAR
RALEIGH, NC

TBD

WHITTENTON BLDGS.
SERVICE BLDG. SUPPLY

TRUSSITRAX
A UFP INDUSTRIES COMPANY

UFP SITE BUILT

THESE VALUES ARE APPROXIMATE ONLY

Customer Service (800) 476-9356
Burlington, NC
Jefferson, NC
Clemson, NC
Chesapeake, VA
Liberty, NC
Locust, NC
Greenville, SC
Pinebluff, VA
Oakley, TN

Without prior written authorization from UFP, UFP will not be held responsible for any unauthorized modifications done or costs incurred prior to any alteration or modification of product. Ownership of delivered product upon delivery within permission is prohibited. UFP relinquishes any unauthorized use of this document without written permission.

Any unauthorized use of this document without written permission is prohibited. UFP relinquishes ownership of delivered product upon delivery. UFP will not be held responsible for any unauthorized modifications done or costs incurred prior to any alteration or modification of product. Ownership of delivered product upon delivery within permission is prohibited. UFP relinquishes any unauthorized use of this document without written permission.