

Harnett County Department of Public Health

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

PROPERTY LOCATION: 919 Purfoy Road (SR 1446)
 SUBDIVISION Vickey Lynn Har LOT # 1
 ISSUED TO: Keith Bullock Builders Inc. Site Improvements required prior to Construction Authorization Issuance:
 NEW REPAIR EXPANSION
 Type of Structure: 3-Bedroom 60'x55' SFD
 Proposed Wastewater System Type: 25% Reduction Sys.
 Projected Daily Flow: 360 GPD
 Number of bedrooms: 3 Number of Occupants: 6 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well NA feet
 Permit valid for: Five years No expiration
 Permit conditions: _____

Authorized State Agent:  Date: 10/26/2021 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.


ISSUED TO: Keith Bullock Builders Inc. PROPERTY LOCATION: 919 Purfoy Road (SR 1446)
 SUBDIVISION Vickey Lynn Har LOT # 1
 Facility Type: 3-Bedroom 60'x55' SFD New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% REDUCTION SYSTEM (Initial) Wastewater Flow: 360 GPD
 (See note below, if applicable
25% REDUCTION SYSTEM (Repair)
Installation Requirements/Conditions
 Septic Tank Size 1000 gallons Number of trenches 3
 Pump Tank Size _____ gallons Exact length of each trench 80 feet Trench Spacing: 9 Feet on Center
 Trenches shall be installed on contour at a Soil Cover: 6 inches
 Maximum Trench Depth of: 18 inches (Maximum soil cover shall not exceed 36" above the trench bottom)
 (Trench bottoms shall be level to +/-1/4" in all directions)
 Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: NA inches below pipe
 Conditions: GRAVITY TO D-BOX EQUAL DISTRIBUTION REQUIRED NA inches above pipe
NA inches total

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
 NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent:  Date: 10/26/2021
ANDREW CORBIN Construction Authorization Expiration Date: 10/26/2026

Harnett County Department of Public Health Site Sketch


Property Location: 919 Purfoy Road (SR 1446)

Issued To: Keith Bullock Builders Inc.

Subdivision Vickey Lynn Har

Lot # 1

Authorized State Agent: _____

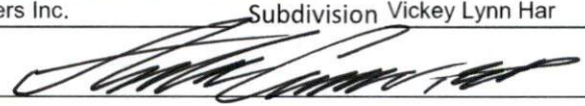


Date: 10/26/2021

ANDREW CORBIN

- ~~*PORT TO~~
- * GRAVITY TO D-BOX EQUAL DISTRIBUTION REQUIRED OR CURTAIN DRAIN REQUIRED AROUND SYSTEM
- * INSTALL AS HIGH UPHILL AS CONTROL ALLOW W/ STEPDOWN IN FIRST LINE

* 18IN TRENCH MAX

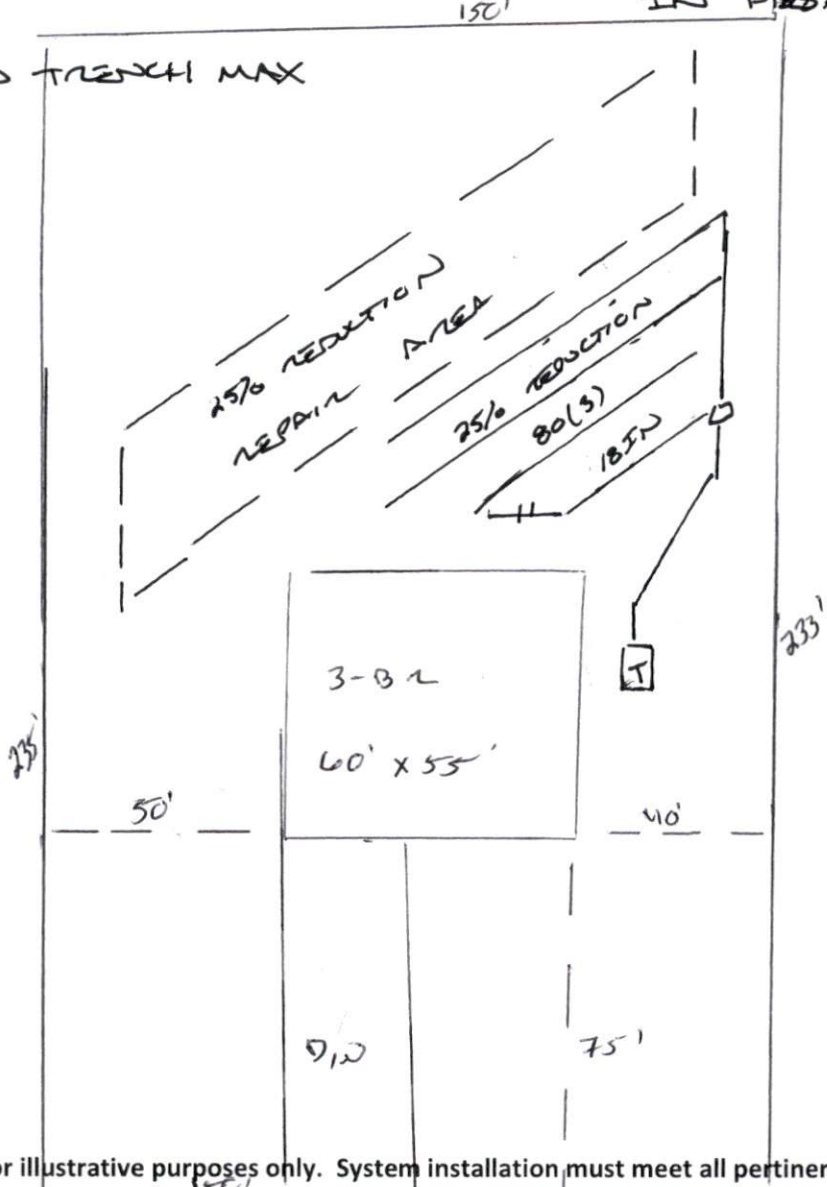

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.

PURFOY ROAD (SR 1446)