
Harnett County Department of Public Health

Improvement Permit

A building permit cannot be issued with only an Improvement Permit PROPERTY LOCATION: 250 Long Meadow Ln. (Baptist Grove Rd. -ISSUED TO: D.R. Horton Inc. SUBDIVISION Lafayette Meadows EXPANSION NEW X REPAIR Site Improvements required prior to Construction Authorization Issuance: Type of Structure: 38x36(4bed/2.5ba) SFD Proposed Wastewater System Type: 25% Reduction Sys. Projected Daily Flow: 480 Number of Occupants: 8 Number of bedrooms: 4 Basement Yes ☐ No May be required based on final location and elevations of facilities Pump Required: XYes Type of Water Supply: Community Public Well Distance from well NA Permit valid for: X Five years No expiration Permit conditions: 13/2021 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit. Construction Authorization (Required for Building Permit) The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout. PROPERTY LOCATION: 250 Long Meadow Ln. (Baptist Grove Re ISSUED TO: D.R. Horton Inc. SUBDIVISION Lafayette Meadows Facility Type: 38x36(4bed/2.5ba) SFD Expansion Basement? Yes X No Basement Fixtures? Yes Type of Wastewater System** Pump to 25% Reduction System (Initial) Wastewater Flow: 480 (See note below, if applicable) Pump to 25% Reduction System (Repair) Number of trenches 5 Installation Requirements/Conditions Septic Tank Size 1000 Exact length of each trench 80 Trench Spacing: 9 Feet on Center gallons Trenches shall be installed on contour at a Pump Tank Size 1000 Soil Cover: 6-12 gallons Maximum Trench Depth of: 18-24 inches (Maximum soil cover shall not exceed (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) NA Pump Requirements: _____ft. TDH vs. __ inches below pipe Aggregate Depth: NA inches above pipe Conditions: Proposal by Hal Owens Assoc. Inc., Pressure Manifold inches total WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. **If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit. Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This SEE ATTACHED SITE SKETCH Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. Authorized State Agent: Construction Authorization Expiration Date: 12/13/2026

ANDREW CURIN

Harnett County Department of Public Health Site Sketch

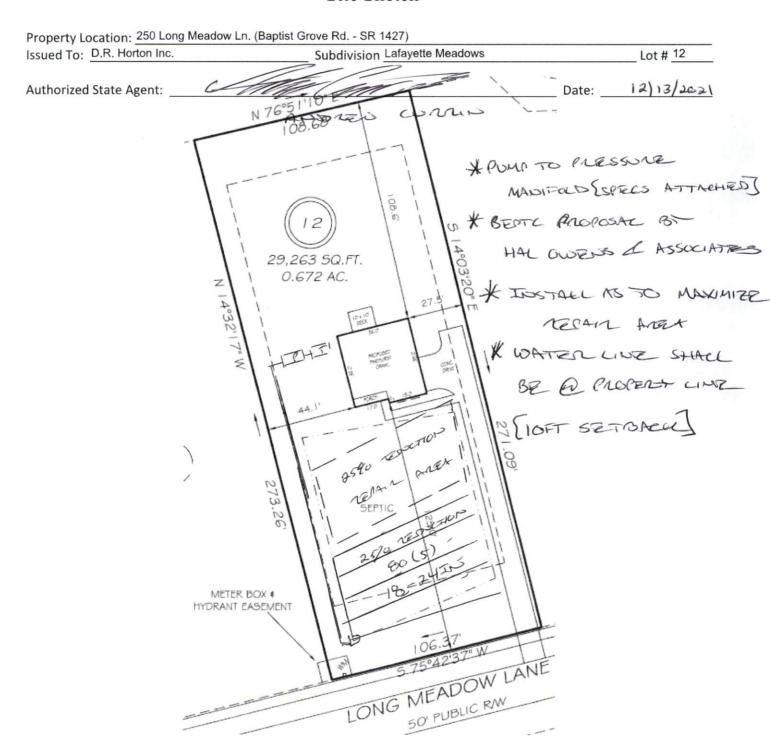

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.

Lot 12, Lafayette Meadows Subdivision

Lines flagged at site on 9-ft centers.

		Relative	Elevation	Drainline Length(ft)	
Line #	Color	East (ft)	West (ft)		
1	В	98.27	98.72	80	
2	W	98.3	98.7	80	
3	R	98.22	98.67	80	
4	В	98.16	98.61	80	
5	W	97.96	98.46	80	
6	R	97.78	98.27	80	
7	В	97.45	97.95	80	
8	W	97.27	97.72	80	
9	R	96.84	97.34	80	
10	W	96.44	96.94	80	
Benchmark		100.00	100.00		



Scale 1 in = 50 ft

.....

Distances are paced and approximate.

Not a survey.

This design represents our professional opinion but does not guarantee or represent permit approval by the Health Department.

4 bedroom home (480 gal/day)

Initial System

Pump to 5 X 80ft (pressure manifold distribution) Accepted Status System (25% reduction drainlines) installed off contour at 18-24 inch trench depth LTAR 0.3 gal/day/sqft

Repair System

Pump to 5 X 80ft (pressure manifold distribution) Accepted Status System (25% reduction drainlines) installed off contour at 18-24 inch trench depth LTAR 0.3 gal/day/sqft

Lafayette Meadows Lot 12

Pressure Manifold Design Criteria

Initial System

Line Number	Line Color	Elevation	Drainline Length(ft)	Schedule	Flow/tap (gpm)	gpd/ft	LTAR (gpd/sqft)
1	В	98.72	80	1/2"sch 80	5.48	1.200	0.400
2	W	98.7	80	1/2"sch 80	5.48	1.200	0.400
3	R	98.67	80	1/2"sch 80	5.48	1.200	0.400
4	В	98.61	80	1/2"sch 80	5.48	1.200	0.400
5	W	98.46	80	1/2"sch 80	5.48	1.200	0.400
Pressure	То	otal Drainline=	400	Total Flow=	27.40		

Pressure		Total Dialilline 400	Total Flow-	21.40	
Head (ft)=	2	Target LTAR* (gpd/sf)=	0.4	LTAR + 5% _	0.42
Daily Flow=	480	Total Flow (gpm)=	27.40	Daily PRT(min)=_	17.52
Dose Vol=	195.90	gallons w/ Pipe Vol @%	75	Dose PRT (min)=_	7.15

Repair System

Line Number	Line Color	Elevation	Drainline Length(ft)	Schedule	Flow/tap (gpm)	gpd/ft	(gpd/sqft)
6	R	97.78	80	1/2"sch 80	5.48	1.200	0.400
7	В	97.45	80	1/2"sch 80	5.48	1.200	0.400
8	W	97.27	80	1/2"sch 80	5.48	1.200	0.400
9	R	96.84	80	1/2"sch 80	5.48	1.200	0.400
10	W	96.44	80	1/2"sch 80	5.48	1.200	0.400

 Total Drainline= 400 Total Flow= 27.40

 Pressure Head (ft)=
 2 Target LTAR* (gpd/sf)= 0.4
 LTAR + 5% 0.42

 Daily Flow= 480 Total Flow (gpm)= 27.40 Daily PRT(min)= 17.52

 Dose Vol= 195.90 gallons w/ Pipe Vol @% 75 Dose PRT (min)= 7.15

^{*} Target LTAR: Convert LTAR for accepted system drainlines by dividing soil LTAR by 75%