



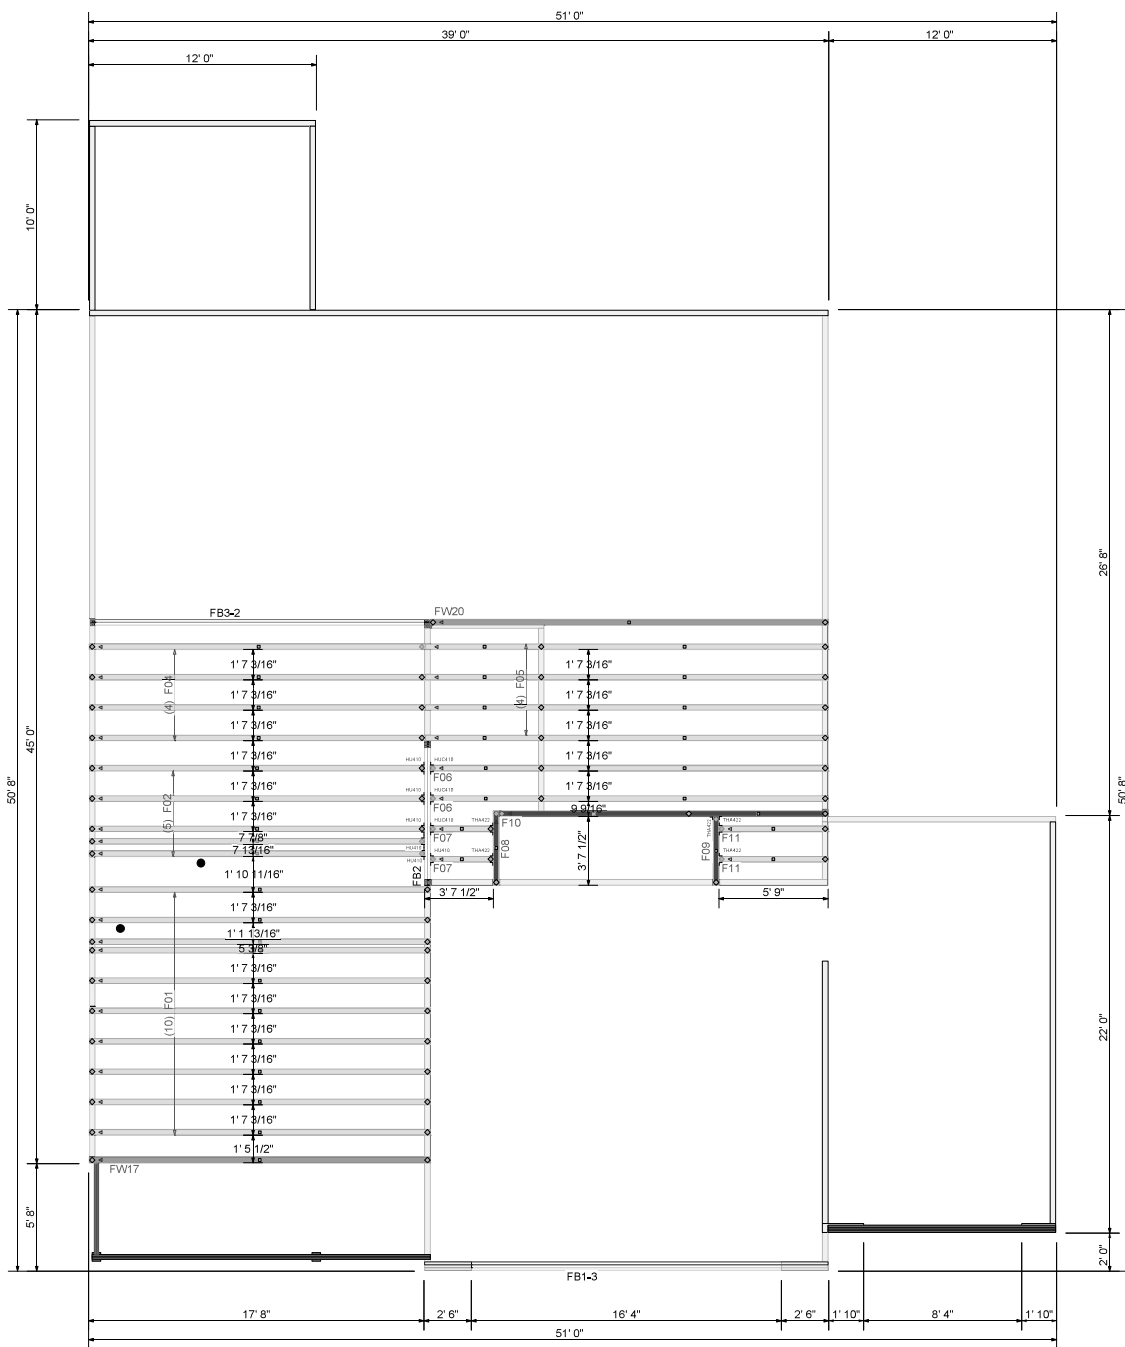


Products					
PlotID	Length	Product	Plies	Net Qty	Fab Type
FB2	8' 0"	2.1 RigidLam SP LVL 1-3/4 x 14	2	2	FF
FB1-3	22' 0"	2.1 RigidLam SP LVL 1-3/4 x 16	3	3	FF
FB3-2	18' 0"	2.1 RigidLam SP LVL 1-3/4 x 20	2	2	FF

Truss Connector Total List		
Manuf	Product	Qty
Simpson	HU410	6
Simpson	HUC410	3
Simpson	THA422	5



Truss Drawing Left End Indicator

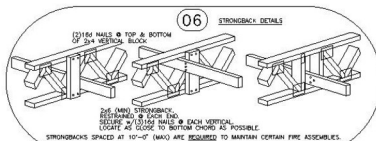

2x4 VERTICAL STRONGBACKS
REQUIRED AT EACH TRUSS
JOINT TO MAINTAIN PROPER
ALIGNMENT OF TRUSS MEMBERS.
STRONGBACKS SPACED AT 10'-0" (MAX) ARE REQUIRED TO MAINTAIN CERTAIN FIRE ASSEMBLY.
STRONGBACKS ARE RECOMMENDED TO RESIST REDWOOD.

** GIRDERS MUST BE FULLY CONNECTED TOGETHER PRIOR TO ADDING ANY LOADS. ** DIMENSIONS ARE READ AS: FOOT-INCH-SIXTEENTH. ** TRUSS TO TRUSS CONNECTIONS ARE TOE-NAILED, UNLESS NOTED OTHERWISE.

HH Hunt Homes Raleigh Durham

LOT #2 OAK MEADOWS
Maxwell FA

FLOOR PLACEMENT PLAN

DATE: 4/30/2025

DESIGNER: Thomas Poirier

PROJECT NUMBER: 25040237-B

SHEET NUMBER: 1/1



THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual components to be incorporated into the building design at the specification of the building designer. See individual design sheets for each truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the roof and floor systems and for the overall structure. The design of the truss support structure including headers, beams, walls, and columns is the responsibility of the building designer. For general guidance regarding the bracing, consult "Bracing of Wood Truss" available from the Truss Plate Institute, 583 D'Onofrio Drive, Madison, WI 53179.

Revisions	
00/00/00	Name
00/00/00	Name
00/00/00	Name
00/00/00	Name
00/00/00	Name