

SFD 2111-0015

30015

HTE# ~~18-5-13460~~

Harnett County Department of Public Health

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: MARY & RAUL CASTILLO PROPERTY LOCATION: WALKER RD
 SUBDIVISION: _____ LOT # 1

NEW REPAIR EXPANSION
 Type of Structure: SFD (70'x60') (78'x66') Site Improvements required prior to Construction Authorization Issuance: _____
 Proposed Wastewater System Type: PUMP TO 25% REDUCTION SYSTEM
 Projected Daily Flow: 500 480 GPD
 Number of bedrooms: 4 Number of Occupants: 10 8 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well 100 feet Permit valid for: Five years No expiration
 Permit conditions: _____

Authorized State Agent: [Signature] Date: 3/22/18 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit. REVISED 11/23/21 RGMS

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: MARY & RAUL CASTILLO PROPERTY LOCATION: WALKER RD
 SUBDIVISION: _____ LOT # 1

Facility Type: SFD (70'x60') 78'x66' New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** Pump To 25% REDUCTION SYSTEM (Initial) Wastewater Flow: 480 GPD
 (See note below, if applicable)
Pump To 25% Red. Sys. (Repair)

Installation Requirements/Conditions
 Septic Tank Size 1250 1000 gallons Number of trenches 1 350
 Pump Tank Size 1250 1000 gallons Exact length of each trench 730 feet Trench Spacing: 9 Feet on Center
 Trenches shall be installed on contour at a Soil Cover: 6 inches
 Maximum Trench Depth of: 18 inches (Maximum soil cover shall not exceed 36" above the trench bottom)
 (Trench bottoms shall be level to +/- 1/4" in all directions)

Pump Requirements: _____ ft. TDH vs. _____ GPM Aggregate Depth: _____ inches below pipe _____ inches above pipe _____ inches total

Conditions: SEE SITE SKETCH

WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: [Signature] Date: 3/22/18
 Construction Authorization Expiration Date: 3/22/18 11/23/26

REVISED 11/23/21

RGMS

SFD 2111-0015

HTE# 18-5-43460

Permit # 30015

Harnett County Department of Public Health Site Sketch

MARY & RAUL CASTILLO

PROPERTY LOCATOR: WALKER RD

ISSUED TO: ~~NASHVILLE~~ TOLKSON

SUBDIVISION

LOT # 1


Authorized State Agent:

REMS (OLIVER TOLKSON)

Date: 3/22/18

REVISED 11/23/21
 REMS

- LINES
- L R 95'
 - L L 140'
 - L R 105'
 - L L 90'

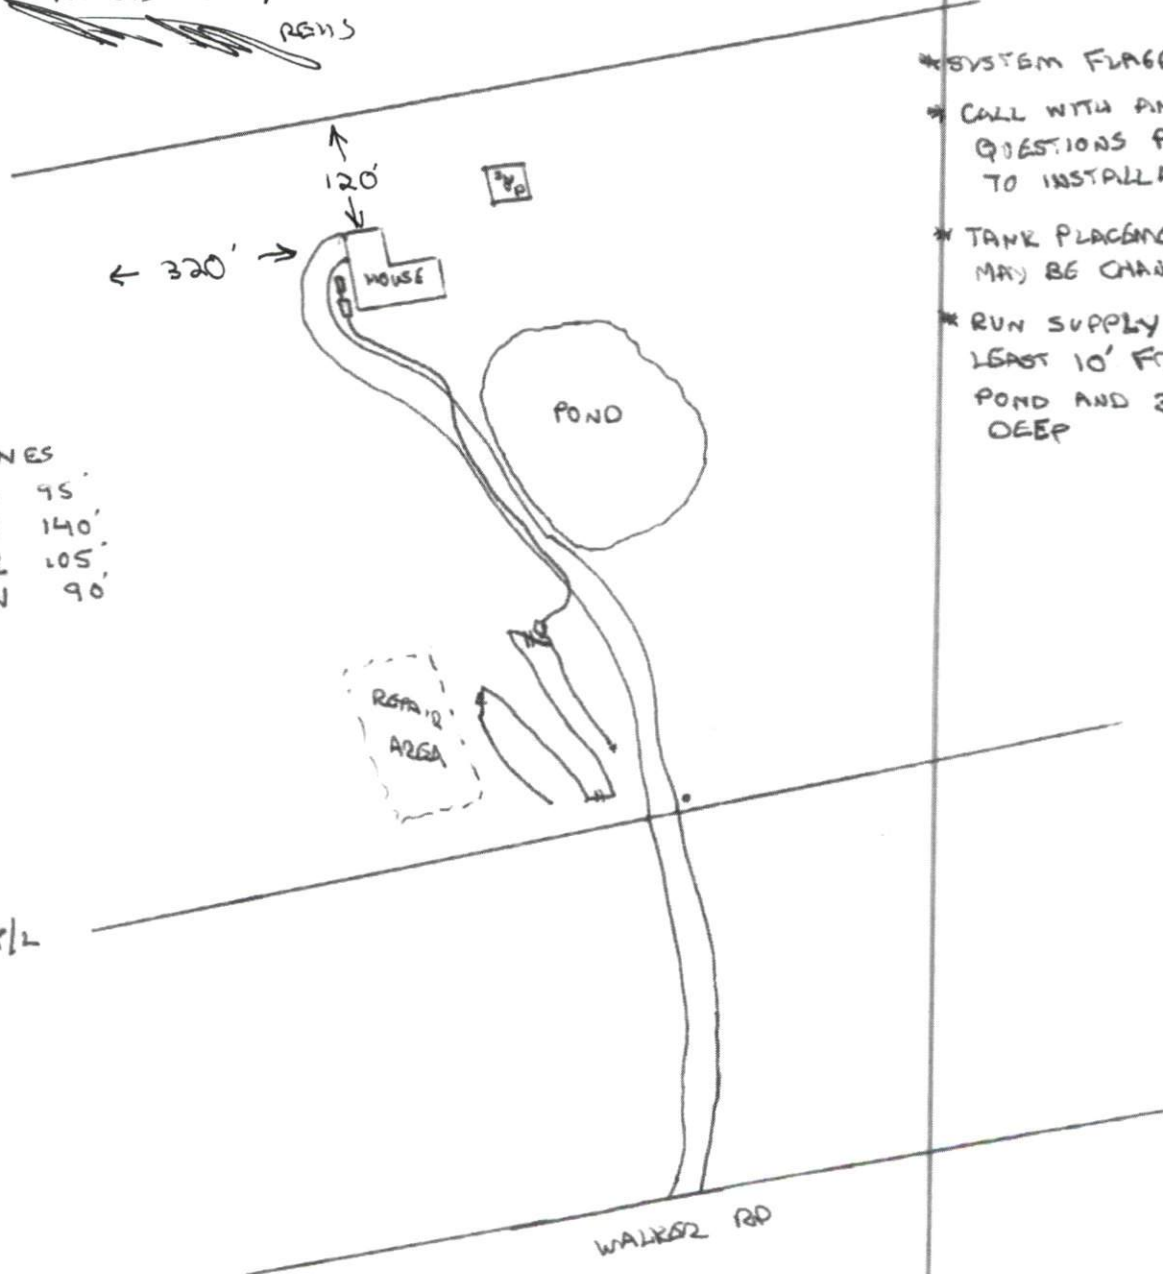

- * SYSTEM FLAGGED
- * CALL WITH ANY QUESTIONS PRIOR TO INSTALLATION
- * TANK PLACEMENT MAY BE CHANGED
- * RUN SUPPLY AT LEAST 10' FROM POND AND 30" DEEP

R/L

WALKER RD