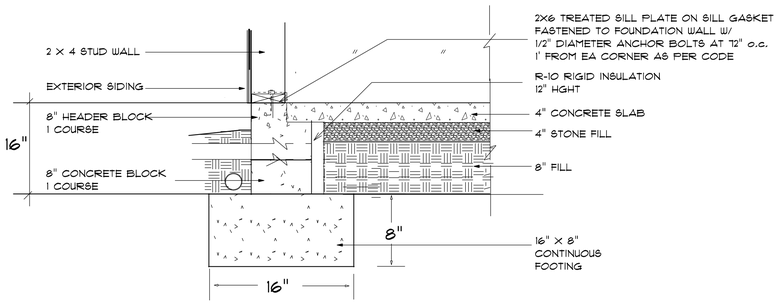

STEM WALL FOUNDATION Detail

not to scale

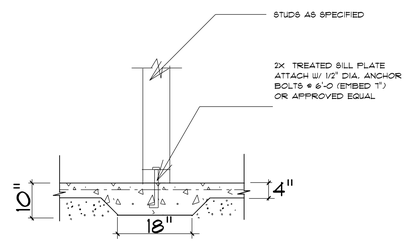

TYPICAL THICKENED SLAB

not to scale

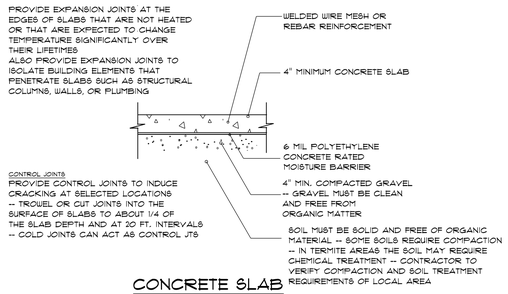

CONCRETE SLAB DETAILS / NOTES

not to scale

FOUNDATION NOTES:
ALL FOOTINGS SHALL BEAR ON ORIGINAL UNDISTURBED SOIL.
THE 28 DAY COMPRESSIVE STRENGTH OF ALL FOOTINGS IS 3000 PSI

PROVIDE WATER PROOFING AND PERIMETER DRAINS AS REQUIRED.

FOUNDATION CONCRETE MIX TO HAVE 1-1/2" MAX AGGREGATE SIZE. CONCRETE FILL MIX TO HAVE 1/2" MAX AGGREGATE SIZE.

FOOTING WIDTHS ARE BASED ON A LOAD-BEARING SOIL CAPACITY OF 2000 PSI.

PROVIDE 6 MIL POLY VAPOR BARRIER TO COVER GROUND SURFACE IN CRAWL SPACE

ALL ANCHOR BOLTS TO BE 12" LONG, 1/2" DIA. A36 UNO ANCHOR BOLTS SHALL BE SPACE AT A MAX OF 6' OC AND NO MORE THAN 1' FROM EA CORNER.

Termite Soil Treatment: Treat entire slab area soil or crawl space surface before vapor barrier is installed and slab is poured with a state approved termiticide. Termiticide should be applied by a licensed and certified pest control professional by the state of North Carolina.

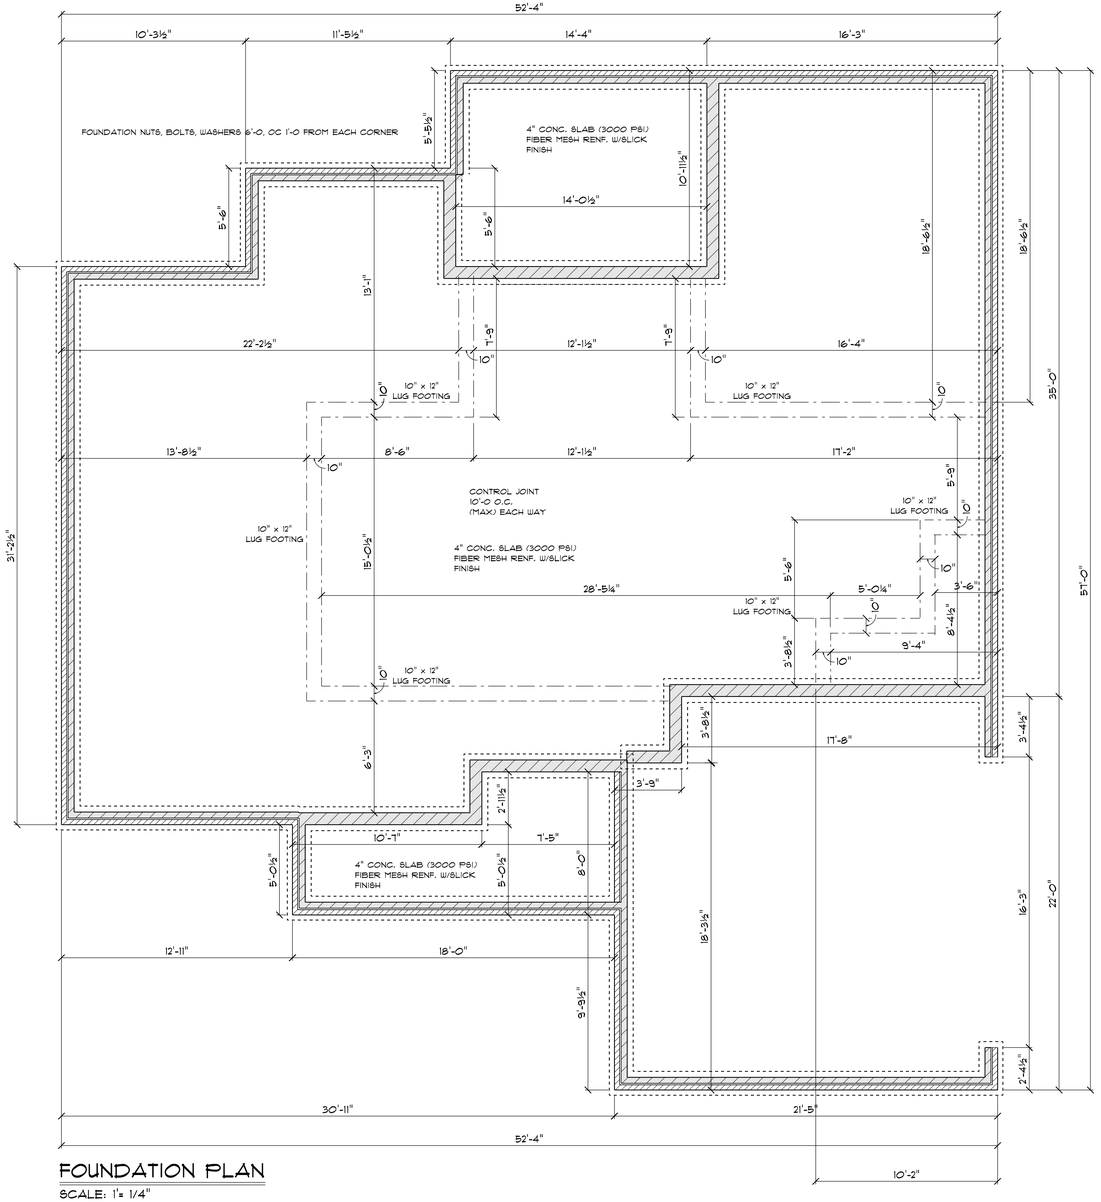

FOUNDATION PLAN

SCALE: 1"= 1/4"

Diane Rives Designs
6205 Mockingbird Lane
Sanford, N.C. 27332
919-770-0393
golfcoast@charter.net

DRD

3A
PAGE #:

SCALE: 1"= 1/4"

DRAWN BY:

DATE: 1/11/2022

CLEAR VIEW BUILDERS
PO BOX 1133
BROADWAY NC 27505

THE TUSCANY
RIGHT GARAGE

STEM WALL
FOUNDATION
PLAN