


Harnett County Department of Public Health

Improvement Permit

A building permit cannot be issued with only an Improvement Permit


ISSUED TO: DUDLEY HUNT PROPERTY LOCATION: 664 MANOR HILLS
 SUBDIVISION: MANOR HILLS LOT # _____
 NEW REPAIR EXPANSION
 Type of Structure: SFD (72'x39')
 Proposed Wastewater System Type: 25% REDUCTION SYS
 Projected Daily Flow: 240 GPD
 Number of bedrooms: 2 Number of Occupants: 4 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well _____ feet
 Permit conditions: _____ Permit valid for: Five years No expiration
 Authorized State Agent:  RGHS Date: 12/16/21 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)


The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: DUDLEY HUNT PROPERTY LOCATION: 664 MANOR HILLS
 SUBDIVISION: MANOR HILLS LOT # _____
 Facility Type: SFD (72'x39') New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 25% REDUCTION SYSTEM (Initial) Wastewater Flow: 240 GPD
 (See note below, if applicable
25% RED. SYS. (Repair)
 Installation Requirements/Conditions
 Septic Tank Size 1000 gallons Exact length of each trench 60 feet Trench Spacing: 9 Feet on Center
 Pump Tank Size _____ gallons Trenches shall be installed on contour at a Soil Cover: 6 inches
 Maximum Trench Depth of: 18 inches (Maximum soil cover shall not exceed 36" above the trench bottom)
 (Trench bottoms shall be level to +/- 1/4" in all directions)
 Pump Requirements: _____ ft. TDH vs. _____ GPM 
 Conditions: SEE CONDITIONS ON SITE SKETCH Aggregate Depth: _____ inches below pipe _____ inches above pipe _____ inches total

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
 NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.
 Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent:  RGHS Date: 12/16/21
 Construction Authorization Expiration Date: 12/16/25

Application # SFD2111-0038

Harnett County Department of Public Health Site Sketch

Property Location: 664 MANOR HILLS


Issued To: DUDLEY HUNT Subdivision MANOR HILLS Lot # _____

Authorized State Agent: REMS (OLIVER TOLKSOOP) Date: 12/16/21

* SLEEVE SUPPLY LINE AS
REQUIRED UNDER DRIVE

* USE A LARGE D-BOX
TO SLOW FLOW INTO
DRAIN LINES

* DIVERT ALL SURFACE
WATER AROUND DRAIN
FIELD

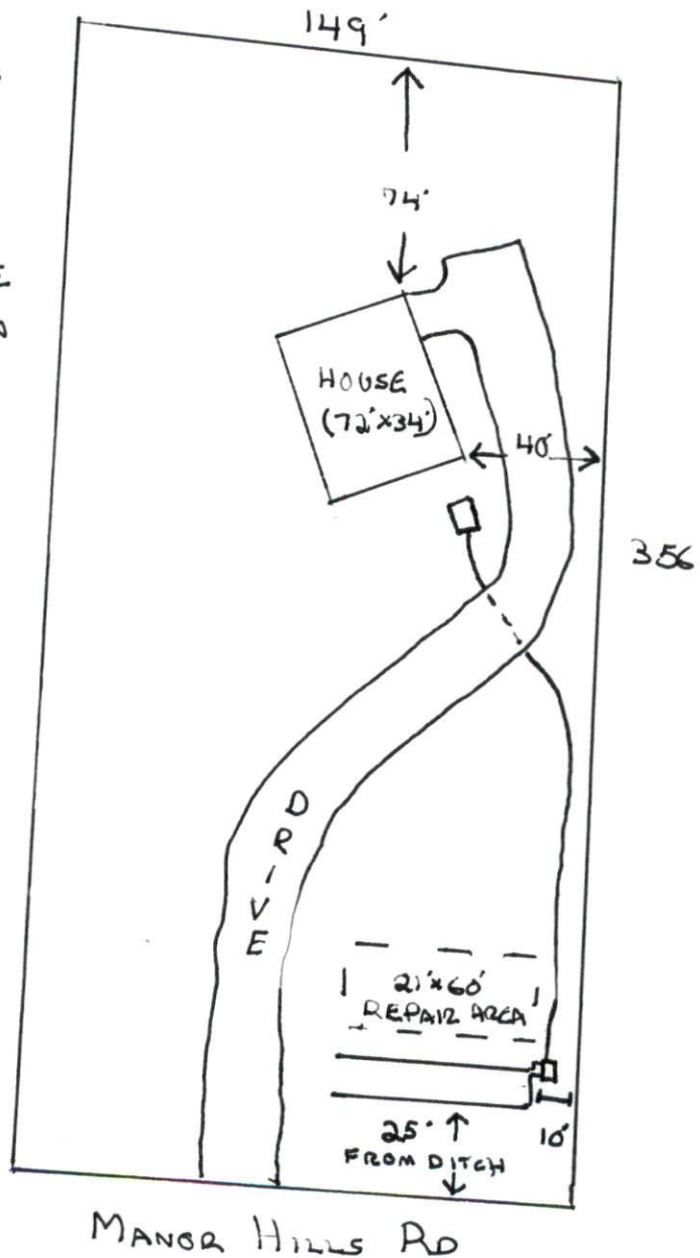

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.