


- NOT ALL TRUSSES ARE SYMMETRICAL AND MAY NOT PERFORM CORRECTLY IF INSTALLED BACKWARDS. PLEASE REFER TO SEALS WHILE SETTING TRUSSES TO ENSURE TRUSSES ARE ORIENTED CORRECTLY

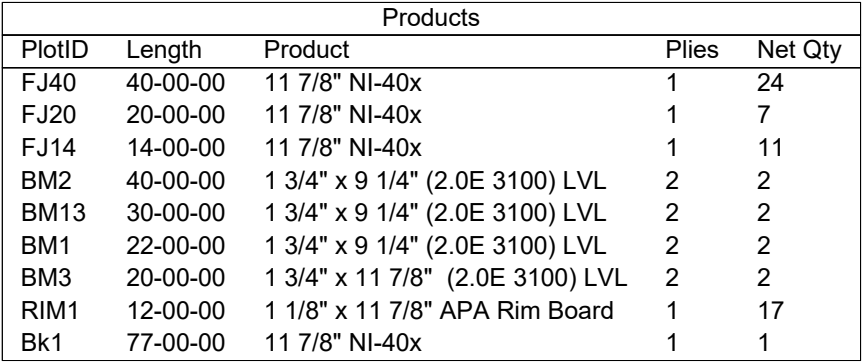

THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See individual design sheets for each truss design. The building designer is responsible for temporary and permanent bracing of the roof and floor system and for the overall structure. The design of the truss support structure including headers, beams, walls, columns, and foundation shall be the responsibility of the building designer. For general guidance regarding sufficient blocking in floor cavity under point loads see the Truss Plate Institute, 983 D'Onofrio Drive Madison, WI 53719. For more information contact the manufacturer or consult "Bracing of Wood Trusses" available from the Truss Plate Institute.

REVIEWED BY:

APPROVED BY:

DATE: _____

Hanger Conversion Chart

Client: **MATTAMY HOMES**

Simpson

Job Name: **CASCADE - CRAFTSMAN**

LUS26

Model: **EWP 1ST FLOOR**

070011
JH11S26-2


Lot #:	78	Subdivision:	SEAGRASS
--------	----	--------------	----------

THJA26

Order #:

Sales Rep:	Designer:
------------	-----------

Date: 6/18/2025



RIVERSIDE ROOF TRUSS, LLC

Roof Surface Area: 0 Sq. Ft.

Floor Surface Area: 1882 Sq. Ft.