


Walker Grove 4-Bedroom Septic Proposal True Homes - Lot #9

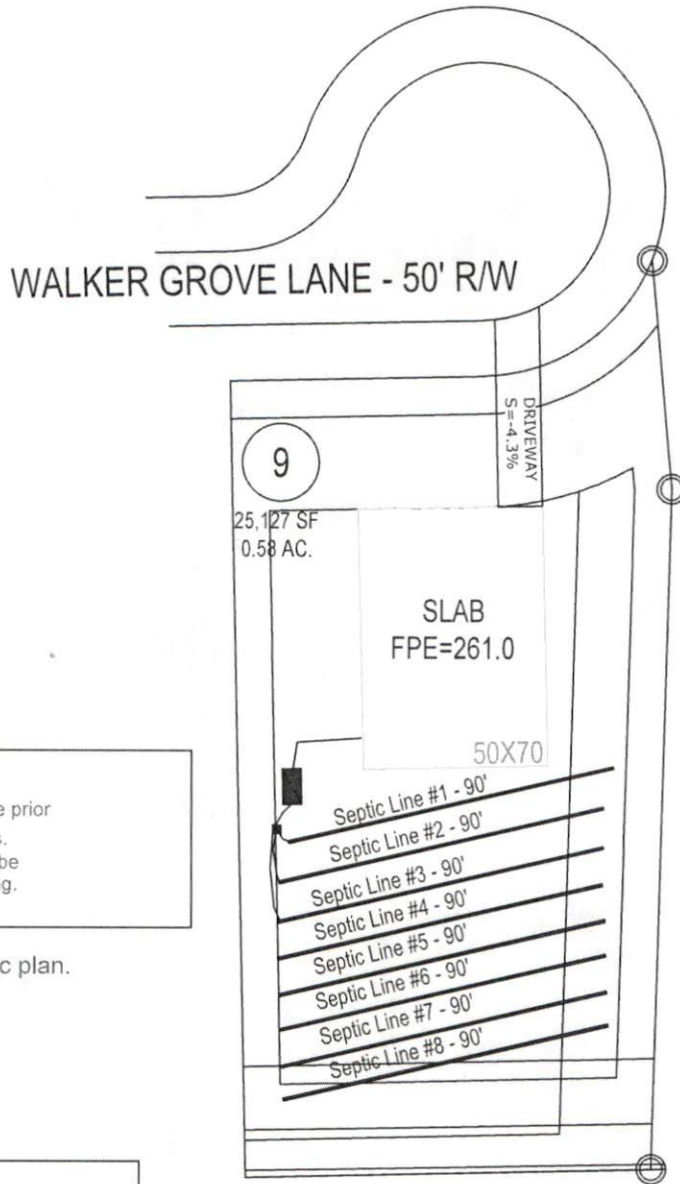

This drawing represents a preliminary septic plan made prior to final construction activities. A revised plan may need to be reworked at time of permitting.

*Not a Permit or a final septic plan.

System: Gravity D-Box
 Lines: 1-4 (340')
 0.35 LTAR
 18" Trench Bottom
 Accepted Status System
 Repair: Gravity to D-Box
 Lines: 4-8 (340')
 0.35 LTAR
 18" Trench Bottom
 Accepted Status System

GRAPHIC SCALE
 1" = 50'



Adams
 Soil Consulting
 919-414-6761
 Job #860