




^{1A} FRAMER MUST REFER TO PLANS WHILE SETTING COMPONENTS. ^{1B} DAMAGED COMPONENTS SHOULD NOT BE INSTALLED UNLESS TOLD TO BY THE COMPONENT PLANT. ^{1C} ALL BEARING POINTS MUST BE INSTALLED PRIOR TO SETTING ANY COMPONENTS.

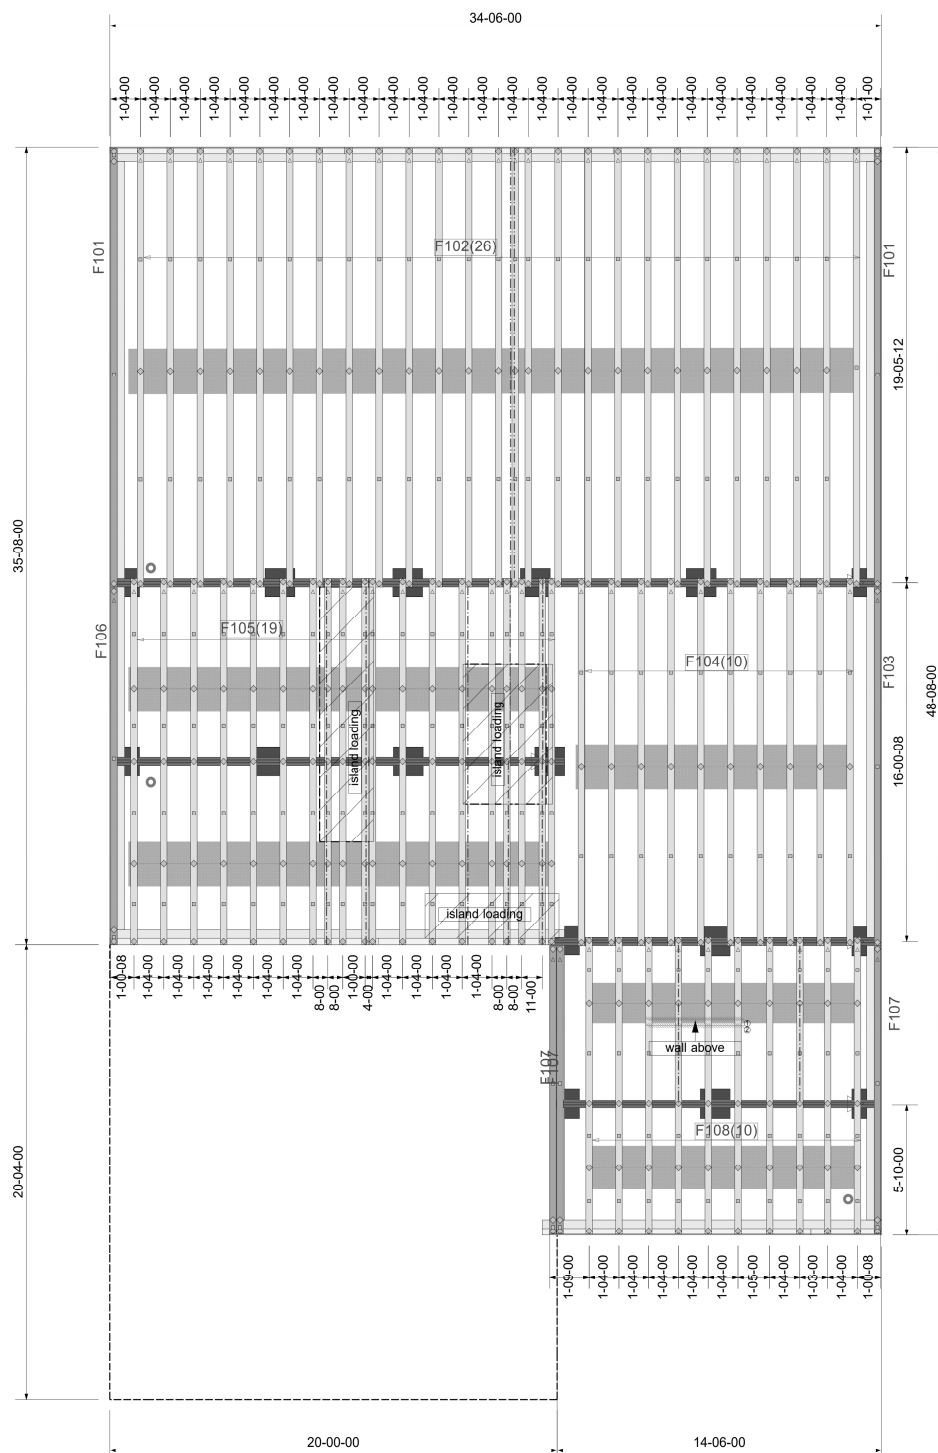

Truss Drawing Left
End Indicator

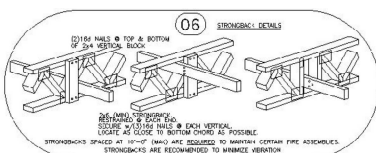

** GIRDERS MUST BE FULLY CONNECTED TOGETHER PRIOR TO ADDING ANY LOADS

** DIMENSIONS ARE READ AS FOOT-INCH-SIXTEENTH

TRUSS TO TRUSS CONNECTIONS ARE TOE-NAILED, UNLESS NOTED OTHERWISE

Revisions	
00/00/00	Name
00/00/00	Name
00/00/00	Name
00/00/00	Name
00/00/00	Name

Scale: **NTS**

Date: **8/25/2025**

Designer: **Geoff Weston**

Project Number: **25080114-A**

Sheet Number: **1/1**

HH Hunt Homes Raleigh Durham

Install Lot 55 Magnolia Acres
Crawl-Taylor FA FL GLH

FLOOR PLACEMENT PLAN

CARTER
Lumber

THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual components to be incorporated into the building design at the specification of the building designer. See individual design sheets for each truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the roof and floor systems and for the overall structure. The design of the truss support structure including headers, beams, walls, and columns is the responsibility of the building designer. For general guidance regarding the bracing consult "Bracing of Wood Trusses" available from the Truss Plate Institute, 583 D'Onofrio Drive: Madison, WI 53179.