BLACKBERRY 78



ELEVATION NOTES:
GRADE ELEVATIONS SHOWN DO NOT NECESSARILY REFER TO THIS OR ANY OTHER LOT. THEY ARE
FOR DIAGRAMMATIC PURPOSES ONLY AND MAY VARY. BUILDER IS RESPONSIBLE FOR ADAPTING THIS PLAN
TO SUIT THE EXISTING TOPOGRAPHY OF THE SITE.

ROOF VENTILATION TO BE DETERMINED BY BUILDER AS PER CODE.

ALL EGRESS OR RESCUE WINDOWS FROM SLEEPING ROOMS MUST HAVE A MIN.
NET CLEAR OPENING OF 4.0 SQ FT. THE MIN NET CLEAR OPENING HEIGHT
DIMENSION SHALL BE 22". THE MIN NET CLEAR OPENING WIDTH SHALL BE 20".

EACH EGRESS WINDOW FROM SLEEPING ROOMS MUST HAVE A SILL HIGHT OF
NO MORE THAN 44" FROM THE FLOOR. ALL WINDOW SIZES ARE NOMINAL AND
ARE TO BE VERIFIED WITH MANUFACTURER FOR AVAILABILITY AND CONFORMITY
TO STATE AND LOCAL CODE REQUIREMENTS.

PORCHES, BALCONIES, OR RAISED FLOOR SURFACES LOCATED MORE THAN 30"
ABOVE THE FLOOR OR GRADE BELOW SHALL HAVE GUARDRAILS NOT LESS THAN
32" IN HEIGHT.

I ASSUME NO RESPONSIBILITY FOR ANY DISTANCES AFTER START OF CONSTRUCTION.

CONTRACTOR/BUILDER SHALL CONSULT WITH HOME OWNER ON ALL INTERIOR AND EXTERIOR MOLDINGS, TRIMS, COLORS, FINISHES, CABINET LAYOUTS, AND MANUFACTORS BEFORE CONSTRUCTION BEGINS.


ALL BEAMS AND FRAMING MEMBERS ARE SIZED BY OTHERS.

1.1 This plan has been drawn to comply with the 2018 NC Building Code

1.2 Minimum Design Loads for Building and Other Structures ASCE 7-9B 2 Roof Dead Load 115 PSF 3 Roof Live Load 20 PSF 4 Typical Floor Dead Load 10 PSF 5 Floor Live Loads 5.1 Rooms other than sleeping rooms 5.2 Sleeping Rooms 30 PSF 5.3 Stairs 40 PSF 5.4 Decks 40 PSF 5.5 Exterior Balconies 60 PSF 6 Wind Loads 6.1 Ultimate Design Wind Speeds 15 MPH 6.2 Wind Importance Factor, IW 1.00 6.3 Exposure B 6.4 Walls (Component and Cladding) 25 PSF 6.5 Roofs (Component and Cladding) 6.5.1 Roof Slopes 2.25/12 to 7/12 34.8 PSF 6.5.2 Roof Slopes 7/12 to 12/12 21 PSF

It is the sole responsibility of the Contractor and/or Builder to conform to all standards, provisions, requirements, methods of construction and uses of materials provided in buildings and/or structures as required by NC Uniform Building Code, Local Agencies and in accordance with good engineering practices. Verify all dimensions prior to construction.

LAMCO CUSTOM BUILDERS/LAMCO HOMES RETAINS TITLE AND OWNERSHIP OF ALL PLANS. THESE PLANS CAN NOT BE COPIED OR REPRODUCED. THESE PLANS CAN NOT BE BUILT BY ANYONE OTHER THAN LAMCO CUSTOM BUILDERS/LAMCO HOMES

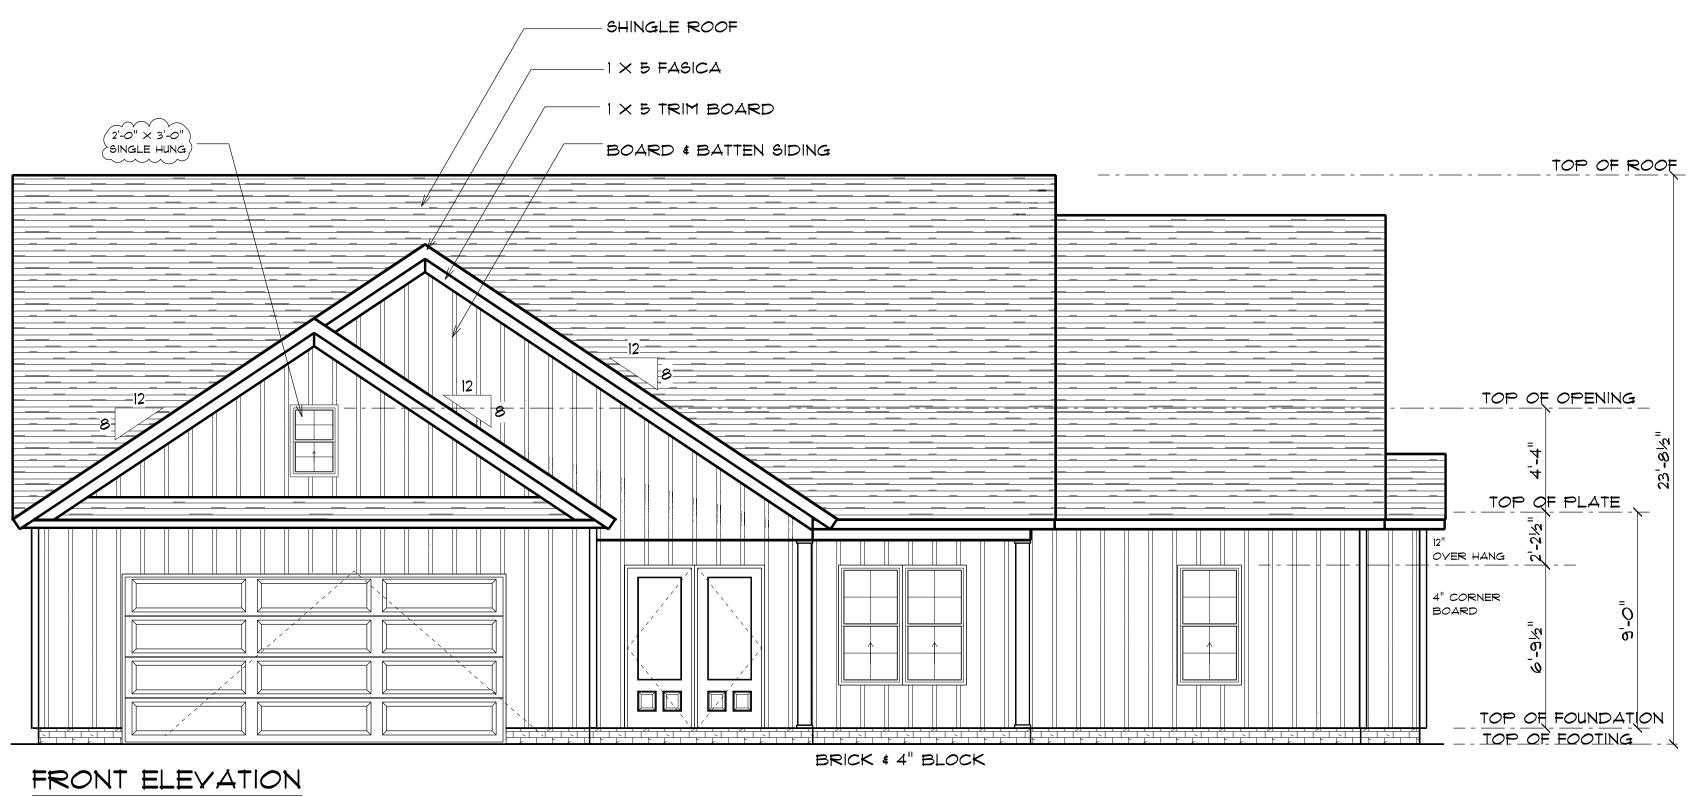

HORIZONTAL SIDING

TOP OF PLATE

TOP OF FOUNDATION

REAR ELEVATION

SCALE: 1'= 1/4"

SCALE: 1'= 1/4"

2

SCALE: 1'= 1/4"


Diame F

Diame F

DATE: 5/25/2023

SCALE: 1'= 1/4"


DIAME SCALE: 1'= 1/4"

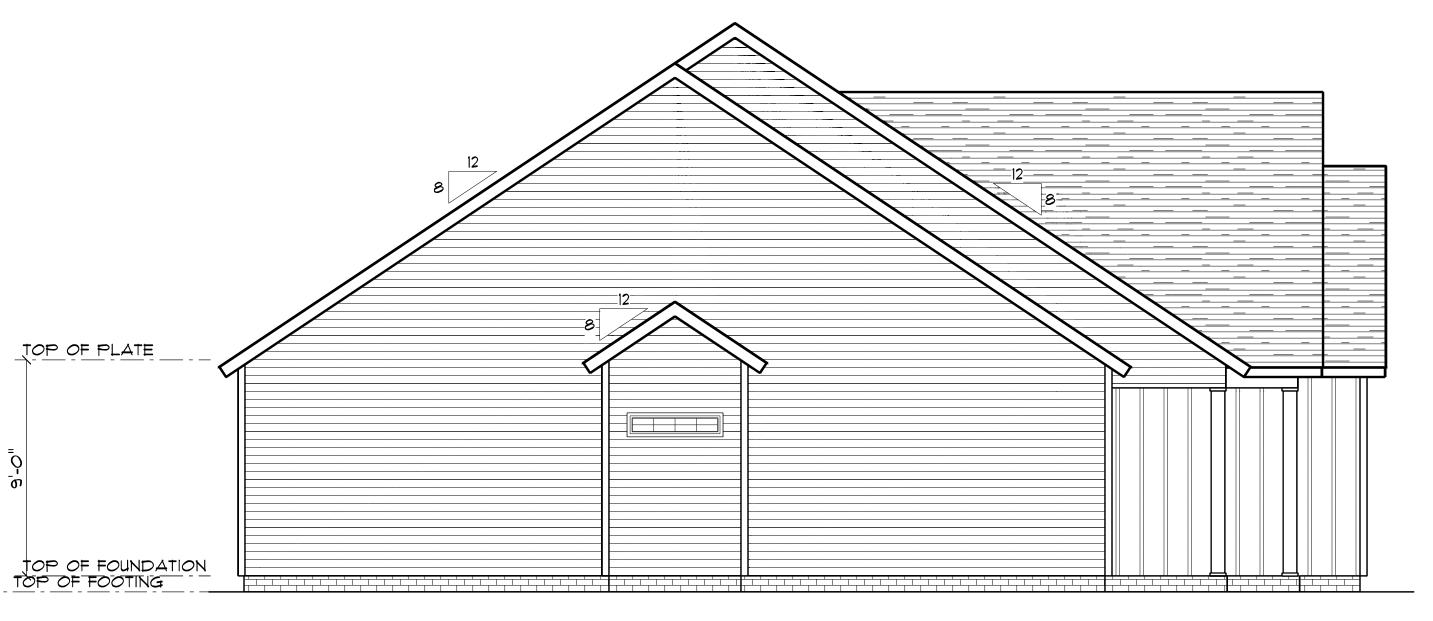

LEFT ELEVATION


SCALE: 1'= 1/4"

LAMCO CUSTOM BUILDERS/LAMCO HOMES RETAINS TITLE AND OWNERSHIP OF ALL PLANS. THESE PLANS CAN NOT BE COPIED OR REPRODUCED. THESE PLANS CAN NOT BE BUILT BY ANYONE OTHER THAN LAMCO CUSTOM BUILDERS/LAMCO HOMES

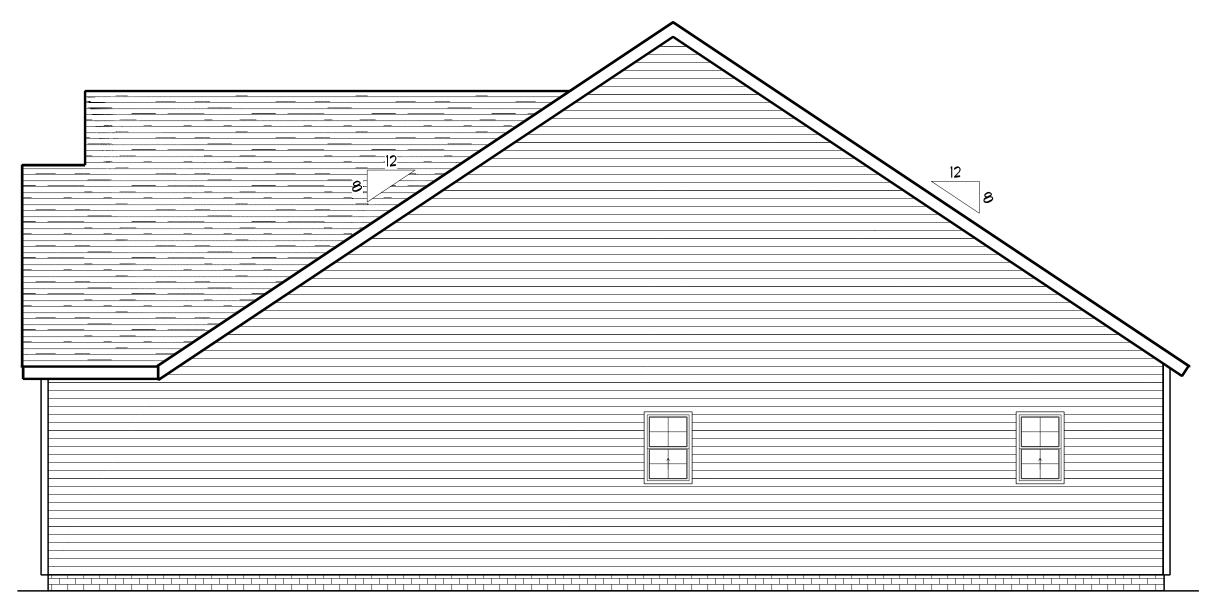


RIGHT ELEVATION


SCALE: 1'= 1/4"

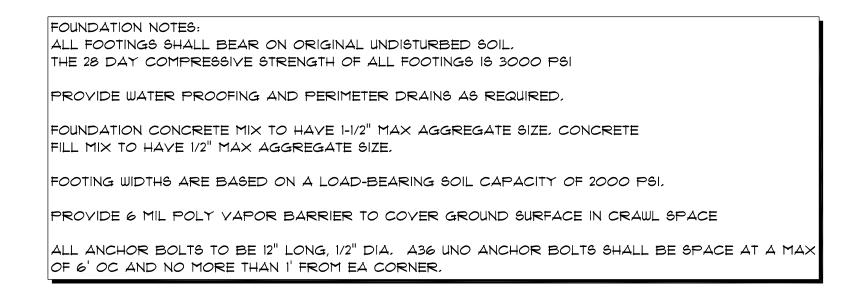


|Termite Soil Treatment: Treat entire slab area soil or crawl space surface before vapor barrier is installed and slab is poured with a state approved termiticide. Termiticide should be applied by a licensed and certified pest control professional by the state of North Carolina.

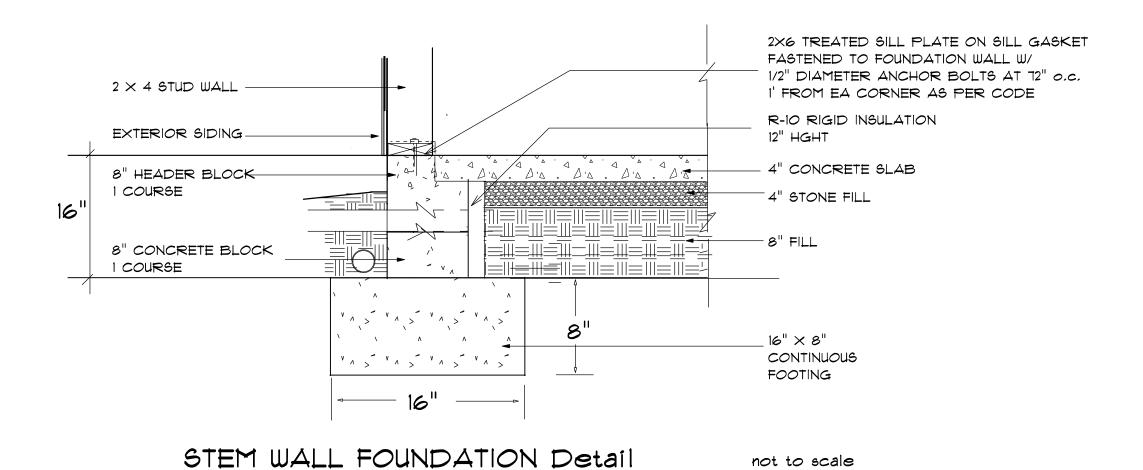

not to scale

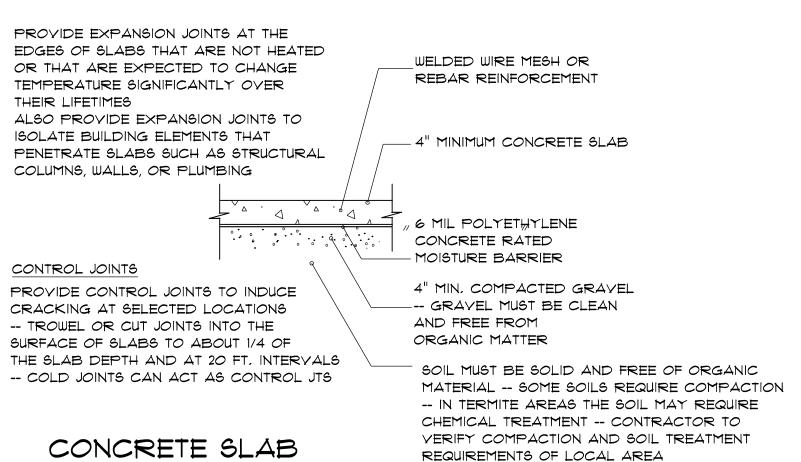


CONCRETE SLAB DETAILS / NOTES

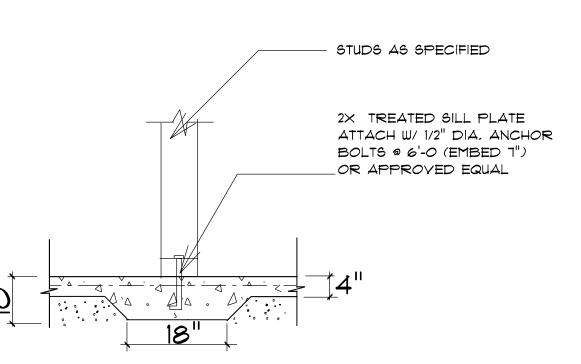

TYPICAL THICKENED SLAB


FOUNDATION NUTS, BOLTS, WASHERS 6'-0, OC 1'-0 FROM EACH CORNER

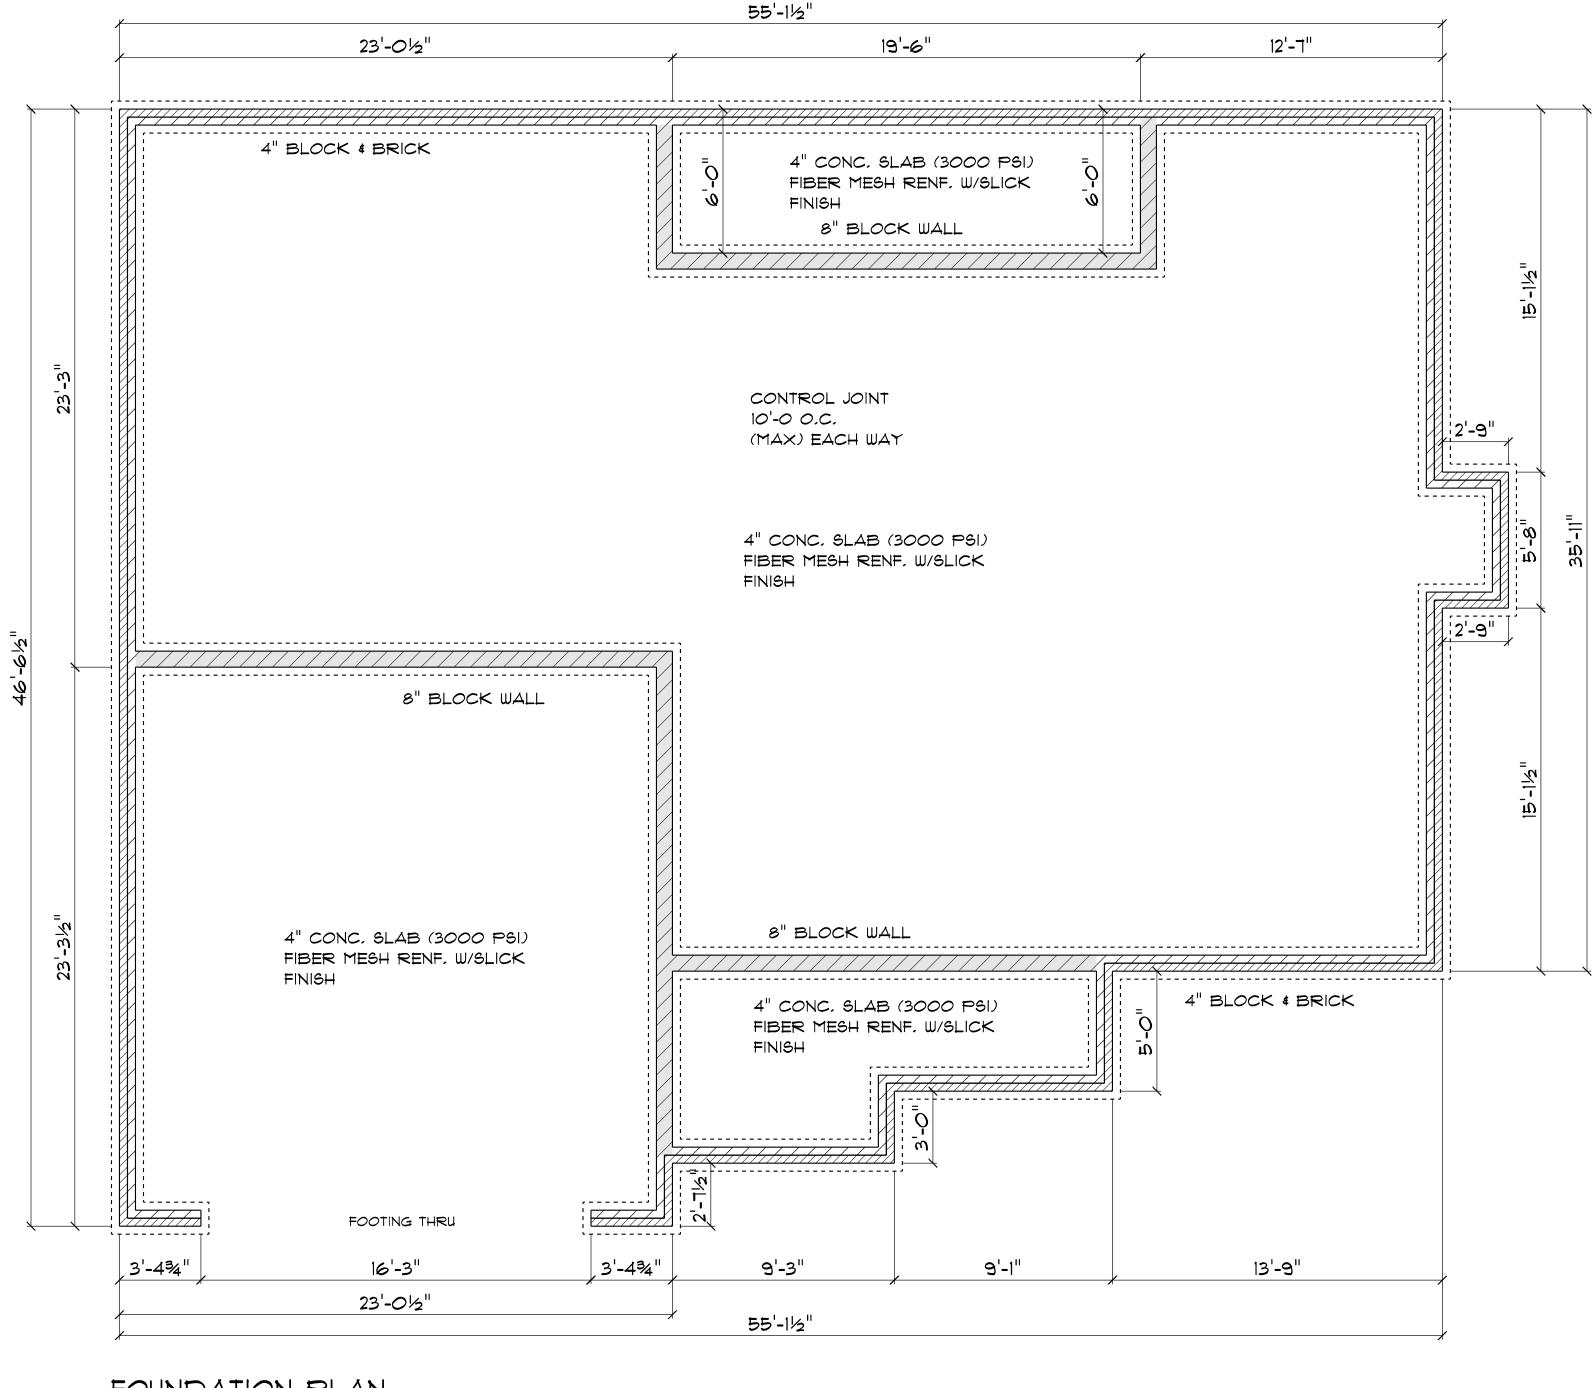

FOUNDATION PLAN

SCALE: 1'= 1/4"





(5				
	6205 Mockingbird Lane	Sanford, N.C. 21332	919-710-0353	golfwoman@charter.net	
		`	1		M

STEM WALL FOUNDATION

ALL LUMBER IN CONTACT WITH CONCRETE OR MASONRY SHALL BE PRESSURE TREATED

FRAMING LUMBER SHALL BE SYP *2 GRADE AND/OR SPRUCE PINE FIR *1 AND/OR *2, KILN DRIED.

WHERE PRE-ENGINEERED JOISTS ARE USED, JOIST MANUFACTURER SHALL PROVIDE SHOP DRAWINGS, WHICH BEAR SEAL OF A N.C. ENGINEER.

STUDS AND JOISTS SHALL NOT BE CUT TO INSTALL PLUMBING OR WIRING WITHOUT ADDING METAL OR WOOD SIDE PANELS TO STRENGTHEN THE MEMBER TO ITS ORIGINAL CAPACITY.

NAIL MULTIPLE MEMBERS WITH 2 ROWS OF 16d NAILS STAGGERED 32" OC AN USE 3-16d NAILS 2" IN AT EACH END. DOUBLE ALL STUDS UNDER ROOF POST DOWNS UNO.

NAIL FLOOR JOISTS TO SILL PLATE WITH 8d TOE NAILS.

ALL EXPOSED FRAMING ON PORCHES AND DECKS SHALL BE PRESSURE TREATED.

PROVIDE WATERPROOFING AND DRAINS AS REQUIRED.

ALL FRAMING TO BE 16" OC UNO. WALL FRAMING DIMENSIONS ARE BASED ON 2 X 4 STUDS UNO. DOUBLE STUDS UNDER ALL HEADERS.


LVL'S AND TJI'S TO BE SIZED BY OTHERS

EXTERIOR WALLS IN LIVING AREAS ARE 2 × 4

WINDOW SCHEDULE								
SIZE	COUNT	LIBRARY NAME	R.O. WIDTH	R.O. HEIGHT				
2'-0" x 3'-0"	3	Window\Single Hung	24"	36"				
2'-8" x 5'-0" Twin	1	Window\Single Hung	64"	60-1/2"				
2'-8" x 5'-0"	5	Window\Single Hung	32"	60-1/2"				
2'-8" x 3'-0"	1	Window\Single Hung	32"	36"				
4'-0" x 1'-0"	1	Glass Block\Transom	48"	12"				

LAMCO CUSTOM BUILDERS/LAMCO HOMES RETAINS TITLE AND OWNERSHIP OF ALL PLANS. THESE PLANS CAN NOT BE COPIED


OR REPRODUCED. THESE PLANS CAN NOT BE BUILT BY ANYONE OTHER THAN LAMCO CUSTOM BUILDERS/LAMCO HOMES

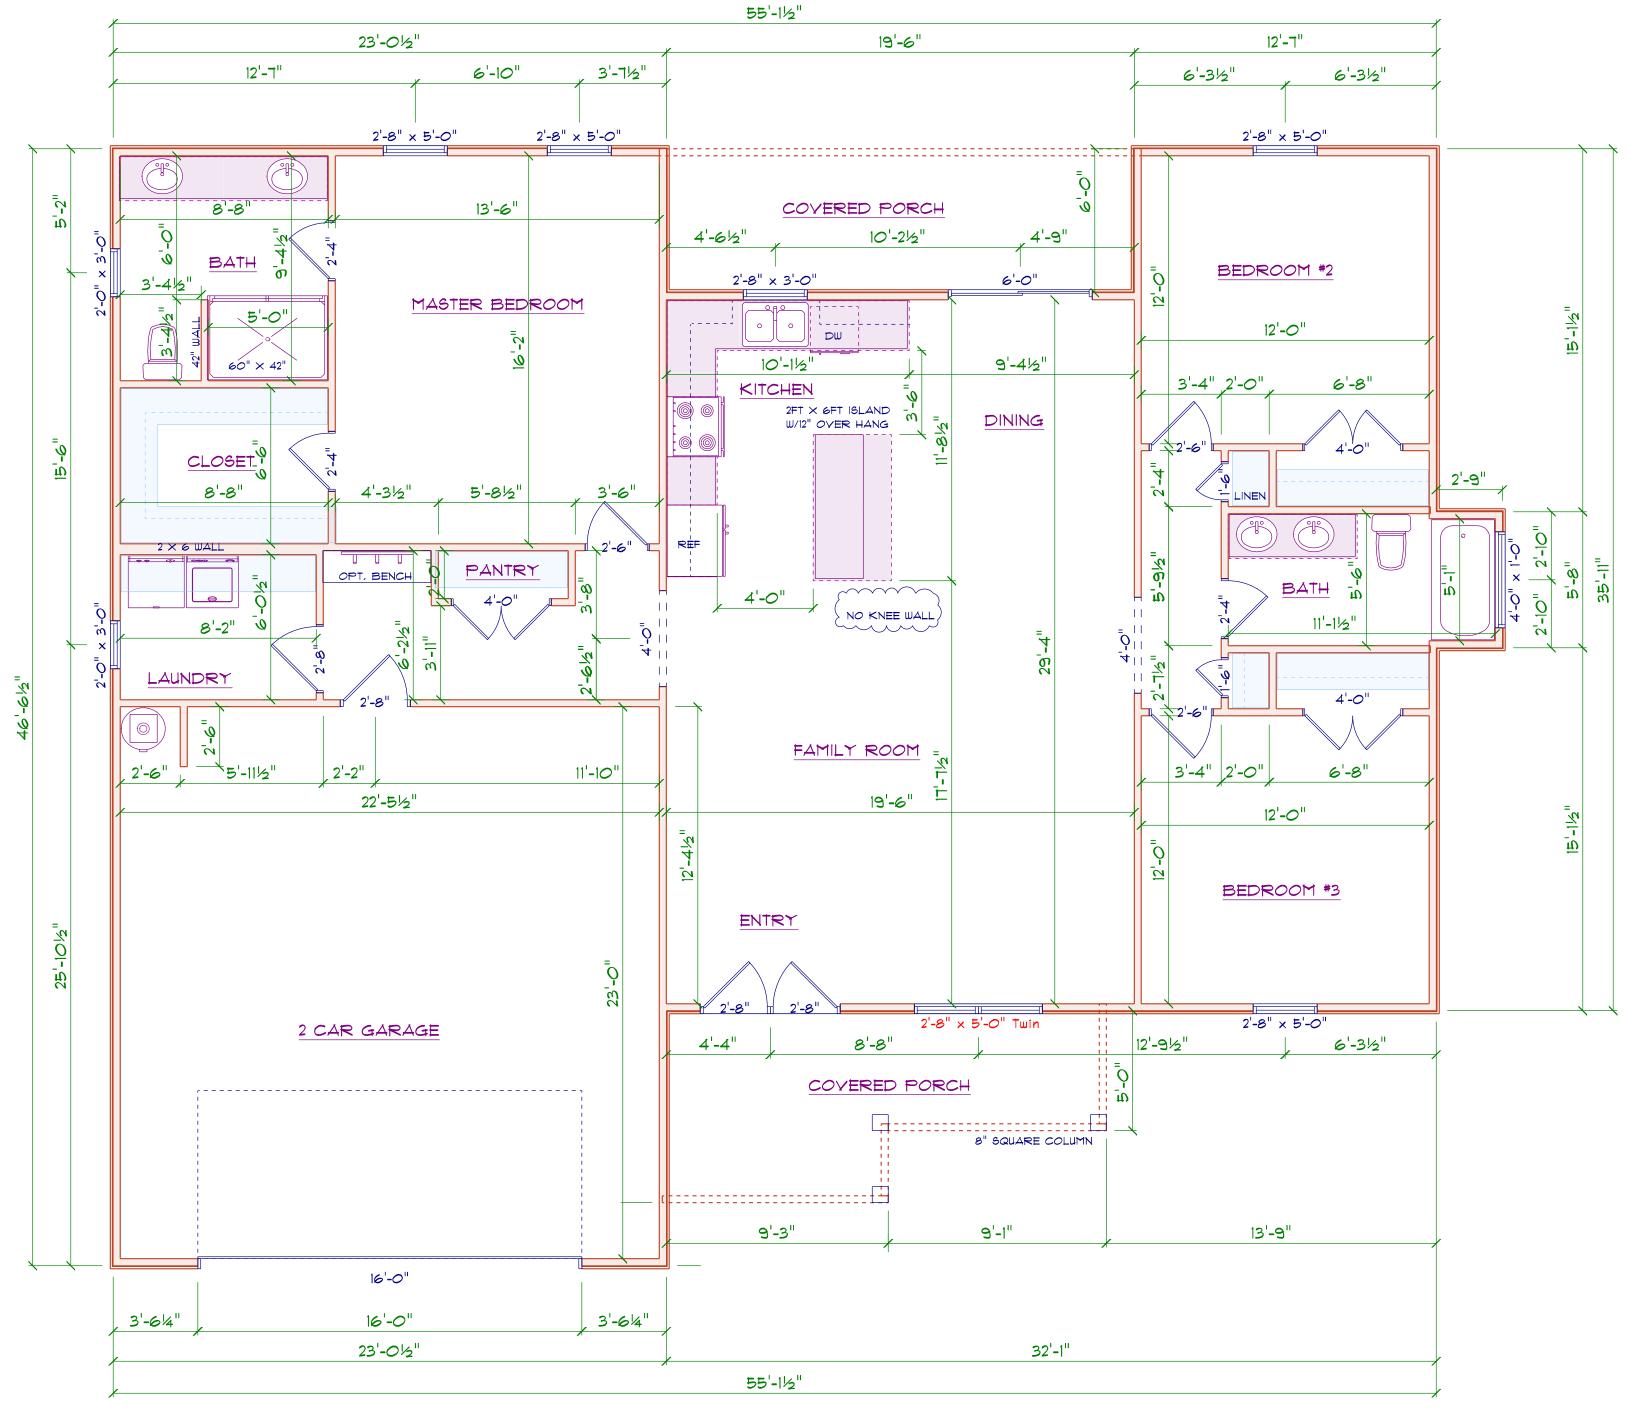

FLOOR PLAN

SCALE: 1'= 1/4"

AREA SCHEDULE				
NAME	AREA			
Heated	1612 sq ft.			
Covered Front Porch	119 sq ft.			
Covered Rear Porch	117 sq ft.			
Garage	551 sq ft.			

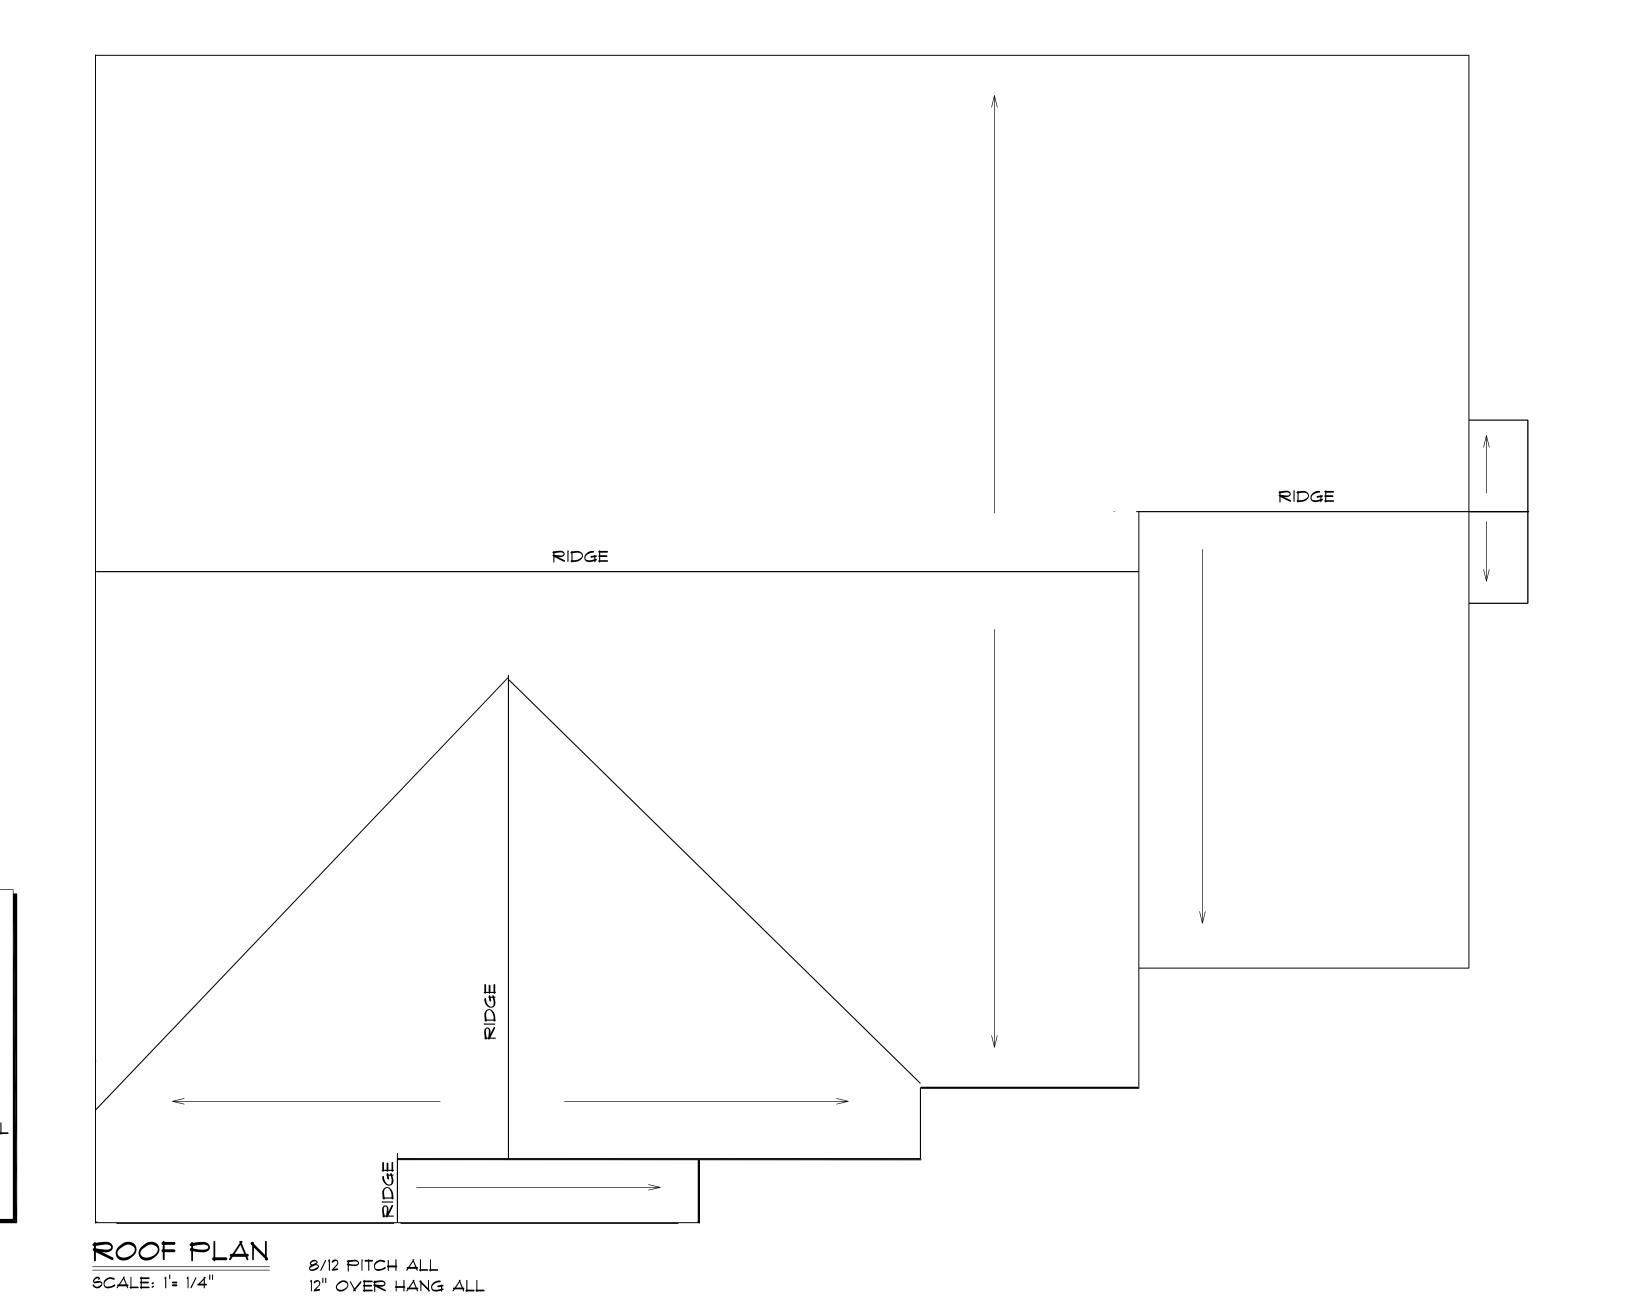


ROOF NOTES:

TRUSSES, BRACINGS, BRIDGING AND CONNECTORS ARE TO BE DESIGNED BY THE TRUSS MANUFACTURER.


IDENTIFY LUMBER BY OFFICIAL GRADE MARKINGS.

DO NOT CUT OR REMOVE CHORDS OR OTHER TRUSS MEMBERS. DO NOT NOTCH OR DRILL TRUSS MEMBERS.


WHERE PRE-ENGINEERED ROOF TRUSSES ARE USED, TRUSS MANUFACTURER SHALL PROVIDE SHOP DRAWINGS, WHICH BEAR SEAL OF A N. C. REGISTERED ENGINEER.

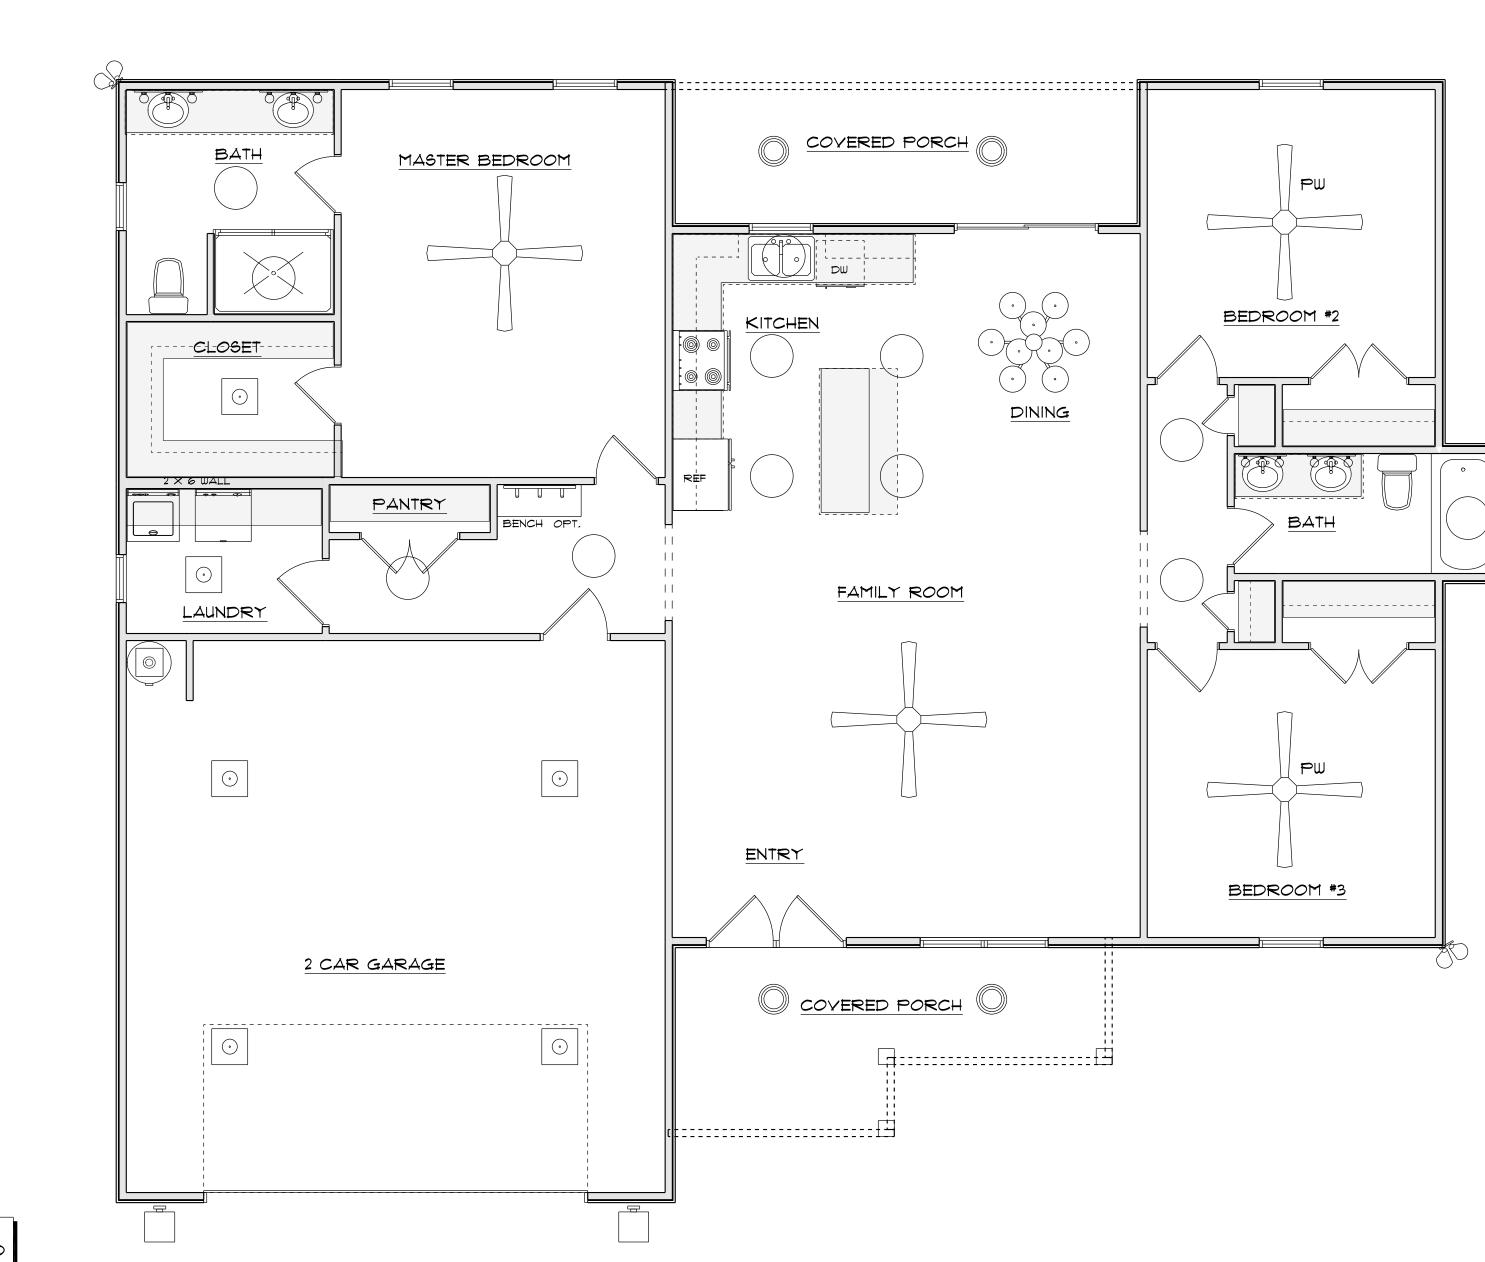

THE TRINITY I FRONT GARAGE

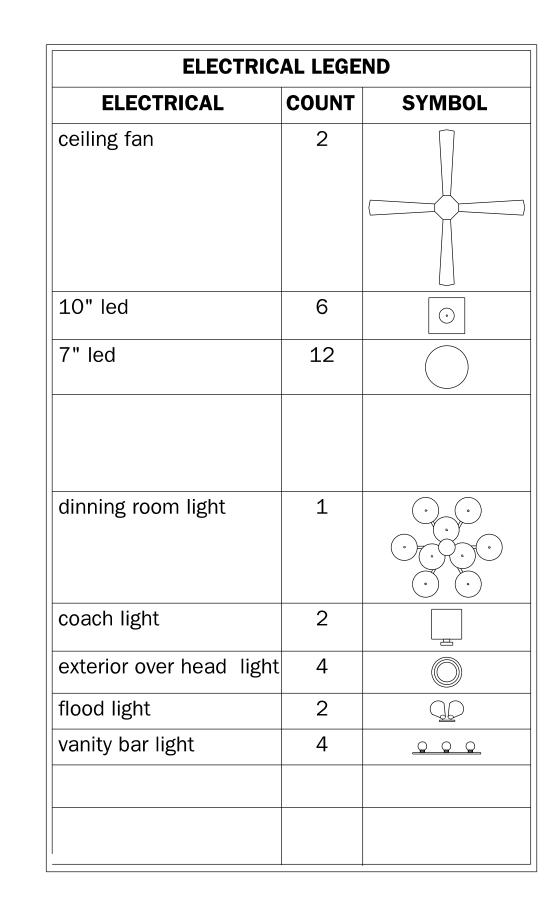


LAMCO CUSTOM BUILDERS/LAMCO HOMES RETAINS TITLE AND OWNERSHIP OF ALL PLANS. THESE PLANS CAN NOT BE COPIED OR REPRODUCED. THESE PLANS CAN NOT BE BUILT BY ANYONE OTHER THAN LAMCO CUSTOM BUILDERS/LAMCO HOMES

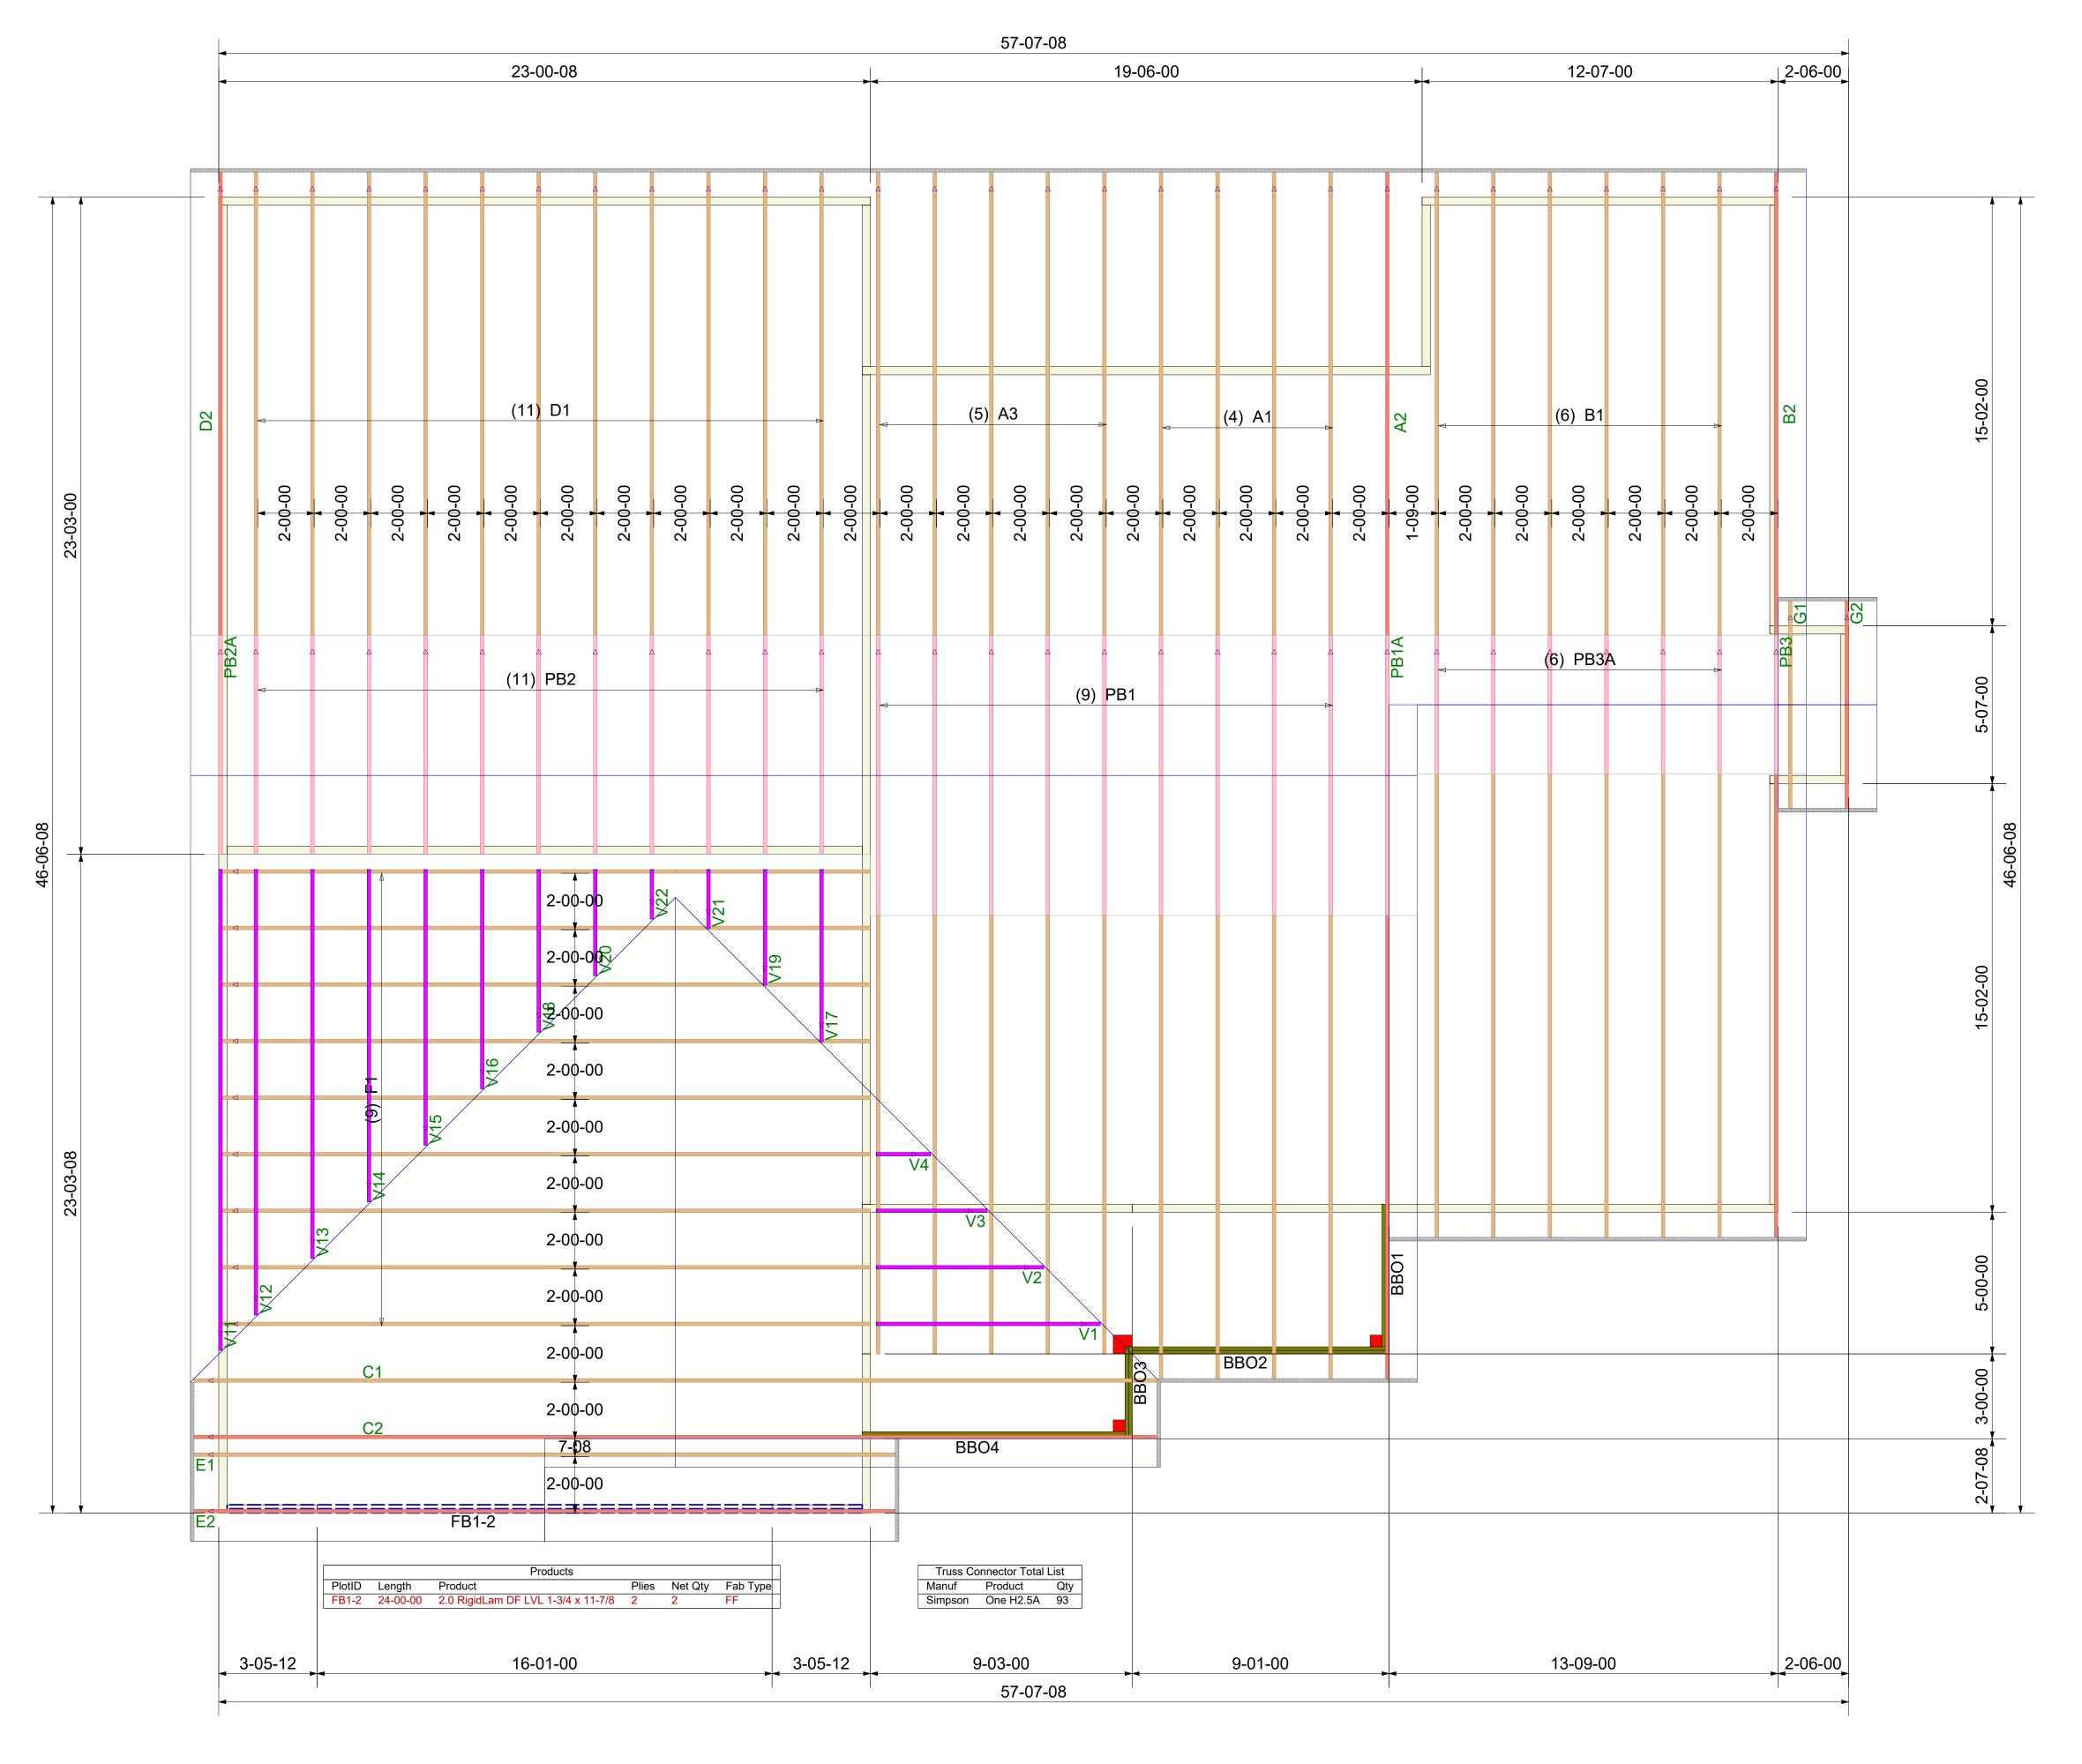

ROOF TRUSS FRAMING

DRAWING SCALE: NTS

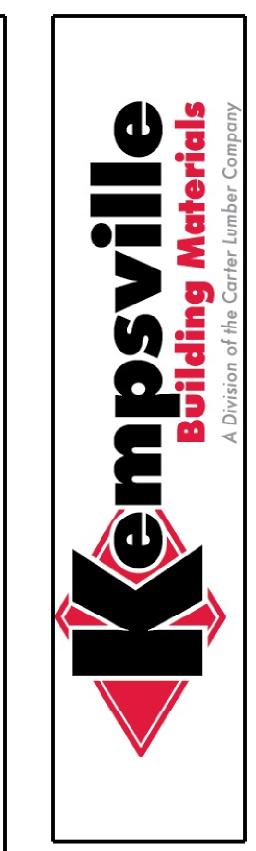

TRINITY PLAN ADDRESS

LAMCO

REVISIONS		
DATE	BY	
5-10-22	MF	
5-19-22	MF	

PROJECT NUMBER

XXXXXXXX

SHEET NUMBER

1/1