


- \*Keep tanks and drain lines 10' from property lines.
- \*Not a survey.
- \*Not a guarantee of a septic permit.
- \*Keep supply lines >5' from property lines.
- \*Some lines are flagged longer in the field than lengths indicate.
- \*No grading septic area.

System: Gravity to D-Box Lines: 7-10, (4x75'x3') Accepted Status System 0.35 Soil LTAR 18" Trench Bottom
Repair: Gravity to Serial Dist. Lines: 1-6, (320') Accepted Status System 0.35 Soil LTAR 18" Trench Bottom

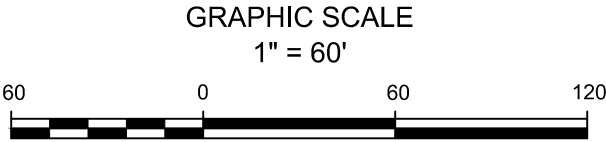

Central Carolina Soil Consulting, PLLC  
 1900 South Main Street, Suite 110  
 Wake Forest, North Carolina 27587  
 Phone (919)569-6704 Fax (919)569-6703

4-Bedroom Septic Layout  
 Engineered Flow Reduction  
 90gal/BR/Day  
 Lot 87, Birchwood Subdivision  
 Harnett County, North Carolina

Job# : 3753
Drawn By : LW
Date : 07/02/2021
Revision:04/26/2022