




- *Keep tanks and drain lines 10' from property lines.
- *Not a survey.
- *Not a guarantee of a septic permit.
- *Keep supply lines >5' from property lines.
- *Some lines are flagged longer in the field than lengths indicate.
- *No grading septic area.

System: Pump to Mani-Tee Lines: 2-5, (360') Accepted Status System 0.35 Soil LTAR 24" Trench Bottom
Repair: Pressure Manifold Lines: 1,6-9, (370') Accepted Status System 0.35 Soil LTAR

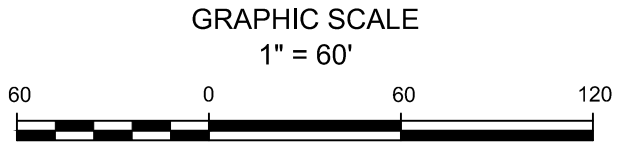

Central Carolina Soil Consulting, PLLC
 1900 South Main Street, Suite 110
 Wake Forest, North Carolina 27587
 Phone (919)569-6704 Fax (919)569-6703

5-Bedroom Septic Layout
 96gal/day/br Engineered Flow Reduction
 Lot 102, Birchwood Subdivision
 Harnett County, North Carolina

Job# : 3753
Drawn By : MB
Date : 09/22/2021
Revision: 06/02/2022