


Carolina Construction and Restoration, LLC  
 Lot #20 Morgan Farms  
 44 Sweet Home Ct.  
 4-Bedroom Septic Proposal

\*If plumbing is not sufficient then a seperate pump tank may be required to dose septic field.

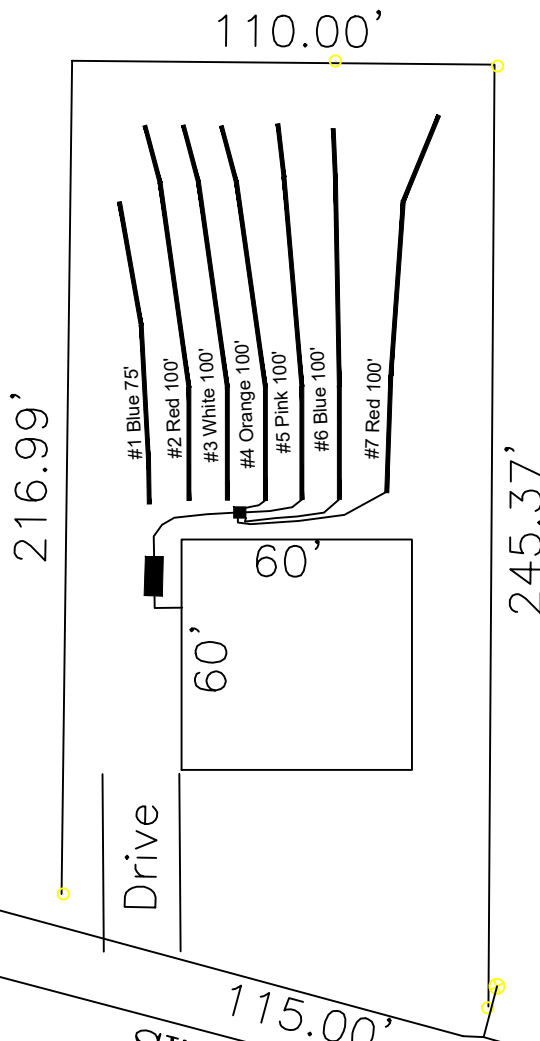

\*1000 Gallon Septic Tank

System: Gravity to D-Box  
 Lines: 4-7 (400')  
 0.3 LTAR  
 18" Trench Bottom  
 Accepted Status System  
 Repair: serial distribution  
 Lines: 1-3 (270')  
 0.3 LTAR  
 18" Trench Bottom  
 T&J Panel - 50% Reduction

SWEET HOME COURT  
 50' PUBLIC R/W & UTILITY

\*Do Not Cut, Fill, or Alter Drainfield or Repair Area  
 \*Comply with all setbacks

GRAPHIC SCALE  
 1" = 50'



Adams  
 Soil Consulting  
 919-414-6761  
 Job #1405