
## Harnett County Department of Public Health

## Improvement Permit

A building permit cannot be issued with only an Improvement Permit PROPERTY LOCATION: 139 Mithcell Manor Dr. (Mitchell Road - SR SUBDIVISION Mitchell Manor PH II ISSUED TO: Weaver Homes Inc. NEW X Site Improvements required prior to Construction Authorization Issuance: REPAIR Type of Structure: 51x63 sfd, 3 beds 3 baths Proposed Wastewater System Type: 25% Reduction Sys. Projected Daily Flow: 360 GPD Number of Occupants: 6 Number of bedrooms: 3 Basement Yes May be required based on final location and elevations of facilities Pump Required: Yes X No Type of Water Supply: Community Public Well Distance from well NA feet X Five years Permit valid for: No expiration Permit conditions: Authorized State Agent:: Date: 0+12+1262 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit. Construction Authorization (Required for Building Permit) The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout. ISSUED TO: Weaver Homes Inc. PROPERTY LOCATION: 139 Mithcell Manor Dr. (Mitchell Road -SUBDIVISION Mitchell Manor PH II LOT # 3 Facility Type: 51x63 sfd, 3 beds 3 baths New Expansion Repair Basement? Yes No Basement Fixtures? Yes No Type of Wastewater System\*\* 25% Reduction System (Initial) Wastewater Flow: 360 (See note below, if applicable X) 25% Reduction Sys. Number of trenches 1 Installation Requirements/Conditions Exact length of each trench 240 Trench Spacing: 9 Feet on Center Septic Tank Size 1000 gallons Trenches shall be installed on contour at a Soil Cover: 8 inches Pump Tank Size \_\_\_\_\_ gallons Maximum Trench Depth of: 20 (Maximum soil cover shall not exceed \_inches (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) NA \_\_ inches below pipe Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_ Aggregate Depth: NA inches above pipe NA inches total Conditions: WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. \*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit. Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This SEE ATTACHED SITE SKETCH Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. Date: 64/27/2022 Authorized State Agent: Construction Authorization Expiration Date: 64/27/2027 ANDREW WALL

## Harnett County Department of Public Health Site Sketch

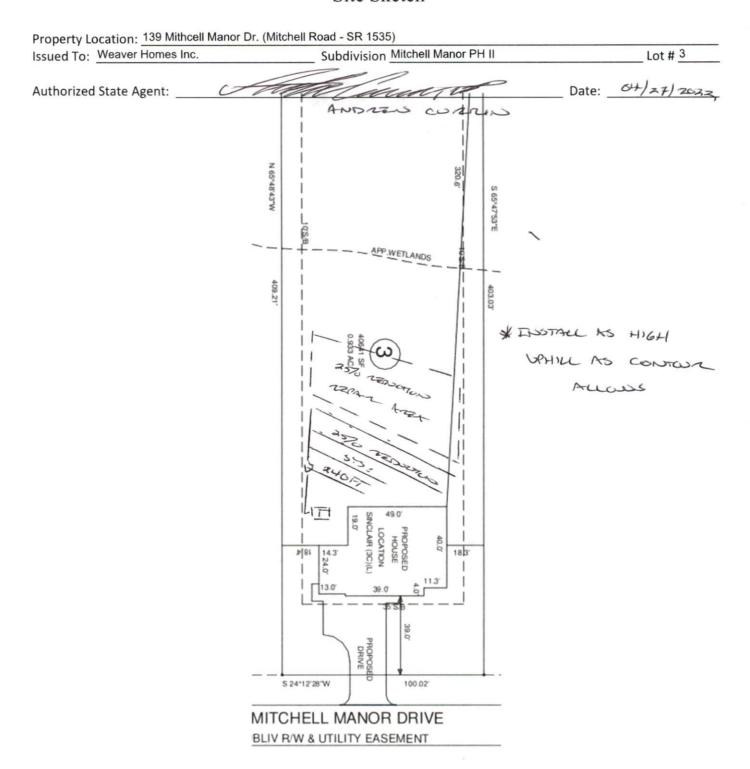

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.