




System:   
 Repair: 

- \*Keep tanks and drain lines 10' from property lines.
- \*Not a survey.
- \*Not a guarantee of a septic permit.
- \*Keep supply lines >5' from property lines.
- \*Some lines are flagged longer in the field than lengths indicate.
- \*No grading septic area.

System: Pump to Dbox.  
 Lines: 4-7, (4 x 75' x 3')  
 Accepted Status System  
 0.35 Soil LTAR

---

Repair: Pressure Manifold  
 Lines: 1-3, (200')  
 T&J Panel  
 0.35 Soil LTAR

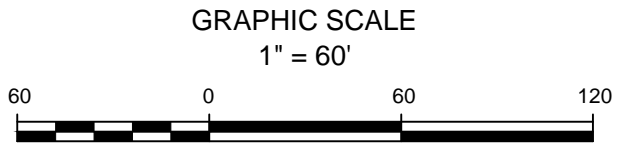

**Central Carolina Soil Consulting, PLLC**  
 1900 South Main Street, Suite 110  
 Wake Forest, North Carolina 27587  
 Phone (919)569-6704 Fax (919)569-6703

**4-Bedroom Septic Layout**  
 90gal/day/br Engineered Flow Reduction  
 Lot 16, Birchwood Subdivision  
 Harnett County, North Carolina

Job# : 3753
Drawn By : MB
Date : 04/04/2022
Revision:06/02/2022