



ELEVATION VIEW
SCALE 1/8" = 1'-0"



ISO VIEW OF FOOTING
NO SCALE

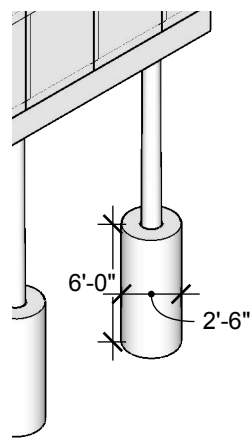

DESIGN CRITERIA 245-205



Elev 146 FT

MEANS OF COMPLIANCE
2015 International Building Code
ASCE 7-10
RISK CATEGORY II
WIND DESIGN

VULT 118 mph
VASD 90 mph

WIND EXPOSURE CATEGORY C
SEISMIC DESIGN
IMPORTANCE FACTOR 1
SOIL CLASS D

SDS 0.17 g
SD1 0.123 g


SEISMIC DESIGN CATEGORY B
SOIL CAPACITY 2500 psf

FLOOD ZONE - AREA OF MINIMAL FLOOD HAZARD

NOTES:
ALL WELDS 3/16 FILLET ALL-AROUND UNLESS NOTED
ALL BOLTS 3/4" A325N
CONCRETE 3000 PSI
PIPES ARE 50 KSI MIN YIELD STRENGTH

2X6 TREATED
TYP FOR
PERIMETER
AND INTERIOR

(2) 12' PCS
FOR 24' LGTH

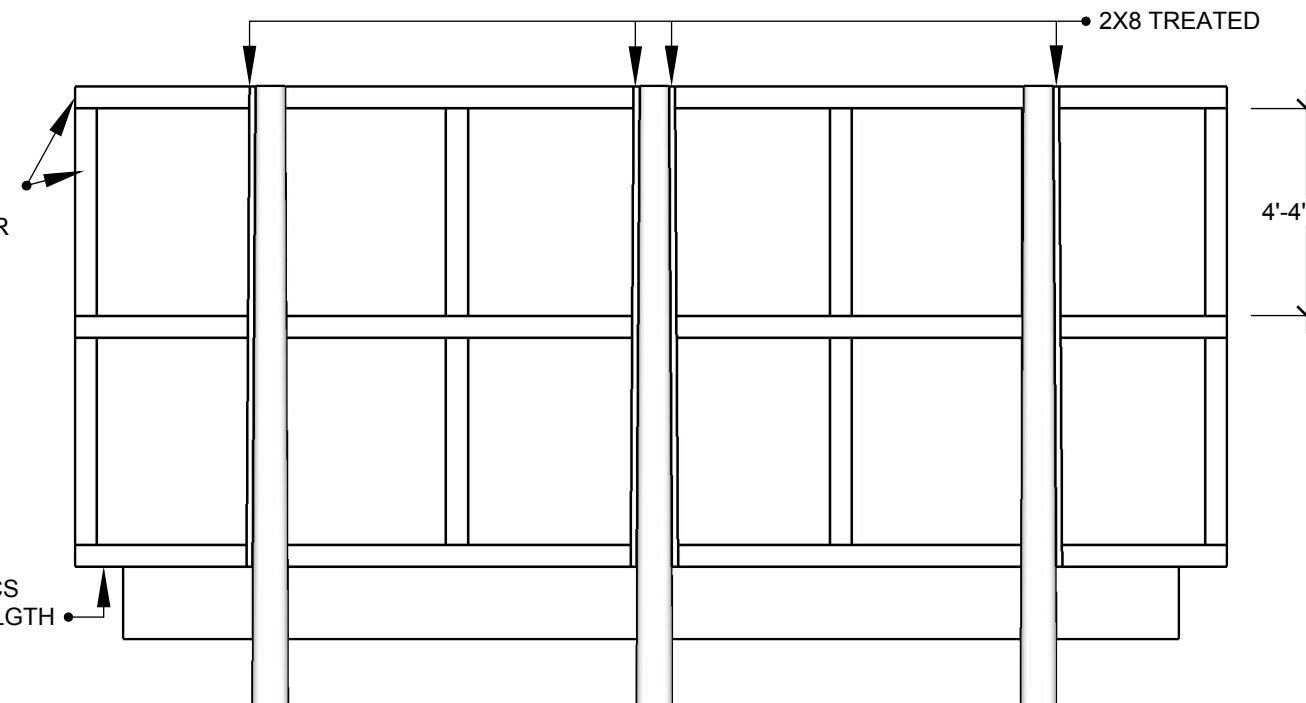

BACK VIEW
SCALE 1/4" = 1'-0"


2X8 TREATED
SCREW TO POST WITH
#8 X 3" (MIN) CONSTRUCTION
SCREWS (2) @ 2' (MAX) OC

3/8 DURAPLY EXTERIOR 4X10 SHEETS
ATTACH EDGES TO 2X6 PERIMETER AND INTERIOR
WITH #8 X 1.5" (MIN) CONSTRUCTION SCREW
@ 10" OC (MAX)

SCREW 2X6 TO 2X8
WITH (2) #8 X 2.5" (MIN)
CONSTRUCTION SCREW

SKIRT

SECTION A
SIDE VIEW
SCALE 1/4" = 1'-0"



WOODEN SIGN

CLIENT
InterState Outdoor, Inc.
212 North Raiford St
Selma, NC 27576

REVISION
0 ISSUE
6/24/22

DESCRIPTION
DETAILS

ENGINEER
Ronald L Knott, P.E.
801 Cricket Knoll Rd
Fuquay Varina, NC 27526
(919)417-1962



01