



- \*Keep tanks and drain lines 10' from property lines.
- \*Not a survey.
- \*Not a guarantee of a septic permit.
- \*Keep supply lines >5' from property lines.
- \*Some lines are flagged longer in the field than lengths indicate.
- \*No grading septic area.

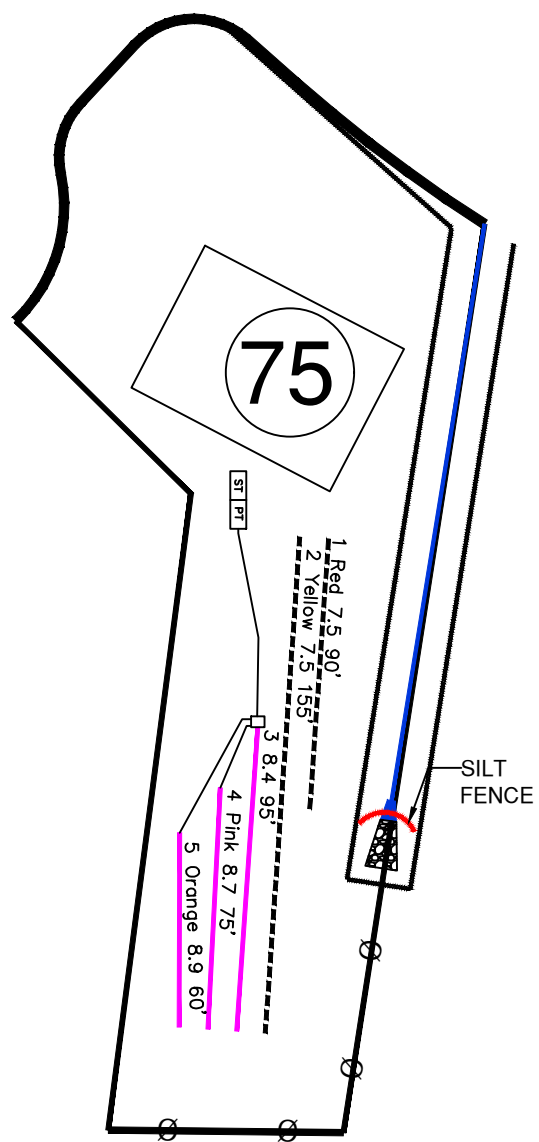

System: Pressure Manifold Lines: 3-5 (230') Accepted Status System 0.4 Soil LTAR 12" Trench Bottom At Grade
Repair: Pressure Manifold Lines: 1, 2 (245') T&J Panel Block 0.4 Soil LTAR 14" Trench Bottom At Grade

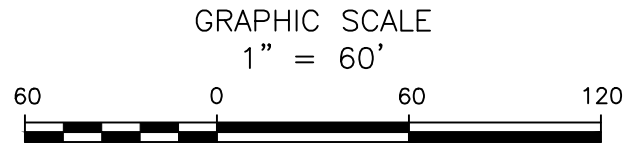

Central Carolina Soil Consulting, PLLC  
 1900 South Main Street, Suite 110  
 Wake Forest, North Carolina 27587  
 Phone (919)569-6704 Fax (919)569-6703

3-Bedroom Septic Layout  
 Lot 75, Birchwood Subdivision  
 Wake County, North Carolina

Job# : 3753
Drawn By : LW
Date : 05/02/2021
Revision: