SOUTHPORT Inventory Marked lot 15 Williams Farm



SHEET COVER

OMES

DATE: SEPTEMBER 16, 201 REV - ALIGUST 01, 2021 DRAWN BY-

NGINEERED BY:


SOUTHPORT **REVISION LIST - STRUCTURAL:**

- COMBINED WILMINGTON AND WILMINGTON II PLANS. (2-18)
- ADDED BRICK OPTION ON SECOND FLOOR. (2-18)
- CALLED OUT SERIES/SPACING OF LIOISTS ON BASEMENT. (2-18)
- 2018 NCRC UPDATE (6-19)
- 2018 SC IRC (2-15-20)
- ADDED ELEVATION A.2 (BRICK WATERTABLE W/SIDING ABOVE) & ELEVATION A.3 (STONE WATERTABLE W/SIDING ABOVE), (2-15-20)

SOUTHPORT **REVISION LIST - ARCHITECTURAL:**

- CREATED ELEVATIONS TO BE IN STANDARDS WITH OTHER PLANS (SEE SHEETS A-1 THROUGH A-3.5)
- CHANGED COLUMNS ON ELEVATIONS TO STANDARD COLUMNS
- CHANGED GARAGE DOORS TO REPRESENT STANDARD GARAGE DOOR FOR EACH ELEVATION
- FIXED COVERED PORCH TO KEEP COLUMNS FROM OVERLAPPING EDGE OF CONCRETE
- REMOVED GRIDS FROM TRANSOMS ABOVE FRONT DOOR
- ADDED NOTE FOR GARAGE DOOR "GARAGE DOOR PER SPECIFICATIONS AND GLASS INSERT (TOP PANEL ONLY)"
- MOVED ROOF PLANS TO SHEETS A-8 & A-8.1
- CREATED SLAB INTERFACE PLAN (SEE SHEET A4 THROUGH A4.2)
- MOVED ALL OPTIONS OFF BASE PLAN AND PLACED ON SEPARATE SHEET
- ADDED NOTE FOR FLUSH COUNTERTOP ON ISLAND
- CHANGED PATIO SIZE TO STANDARD 12'X10'
- ADDED OPTIONAL GAS LINE
- CHANGED KITCHEN LAYOUT
- ADDED 2ND HOSE BIB
- 15. CALLED OUT "45" WALL WITH CAP" AS STANDARD
- CHANGED ALL EXTERIOR WALLS FROM 2X6 TO 2X4 EXCEPT WHERE SHADED
- ADDED NOTE "OPT REF."
- REMOVED NUMBERS ON STAIRS
- ADDED NOTE "OPT. W/D"
- ADDED NOTE "WASHER ALWAYS TO BE LOCATED TO THE LEFT OF DRYER
- VERIFIED VENTILATION AND LIGHT REQUIREMENTS AT OWNER'S BEDROOM MEETS CODE (11-01-20)
- SQUARE FOOTAGES ARE UPDATED AND CHANGED DUE TO MOVEMENT OF WALLS FROM 2X6 TO 2X, TO KEEP JOGS IN ROOMS, EXTERIOR WALL MOVED MEANING ROOF LINES HAVE CHANGED
- SQUARE FOOTAGE OF COVERED PORCH CHANGED DUE TO KEEPING COLUMNS FROM OVERLAPPING CONCRETE EDGE
- CREATED PARTIAL PLANS FOR B & C ELEVATIONS (FLOOR, SLAB, & ELECTRICAL)
- REMOVED ALL WALL OUTLETS
- REMOVED ALL PHONE OUTLETS
- REMOVED ALL TV OUTLETS
- PLACED STANDARD 3 BUILB LIGHT IN KITCHEN
- VERIFIED COACH LIGHT LOCATIONS (SEE ELEVS. FOR DIMS.)
- PLACED DASHED FANS WHERE APPLICABLE WITH NOTE "STD. LIGHT, OPT. FAN/LT PREWIRE"
- 31. LIPDATED ELECTRICAL KEY
- VERIFIED CO2 DETECTOR LOCATIONS
- SHOWED PENDANT LIGHTS AS OPTIONAL
- SHOWED CAN LIGHTS IN KITCHEN AND FAMILY ROOM AS "OPTIONAL CAN LIGHTS"
- PLACED OPTIONAL FLOOD LIGHTS
- PLACED OPTIONAL FLOOR OUTLET IN FAMILY ROOM
- PLACED CALCULATIONS FOR SOFFIT AND RIDGE VENT REQUIREMENTS
- UPDATED STAIR LAYOUT TO KEEP MAIN WALL AT KITCHEN FROM MOVING WHEN OPTIONAL BASEMENT SELECTED.



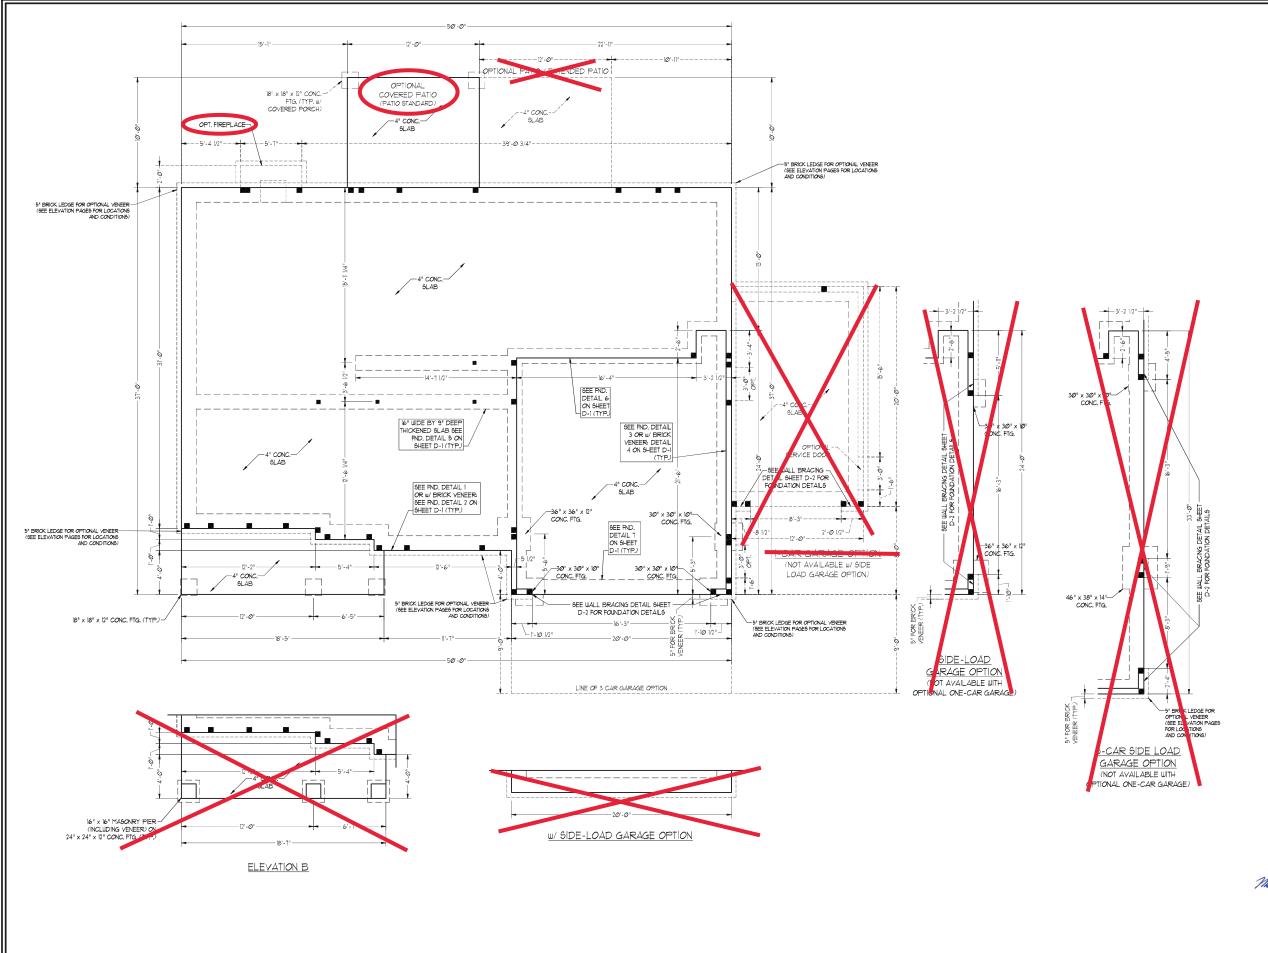

150 MPH ULTIMATE DESIGN WIND SPEED NOTES FOR LESS THAN 30' MEAN ROOF HEIGHT:

STEED NO.1ES PLAN 1839 IHAN
30 TEAN ROOF HEIGHT:

BY THE ROOF HE ROOF HEIGHT:

BY THE ROOF HE BY THE ROOF HEIGHT:

BY THE ROOF HEIGHT:

BY THE ROOF HEIGHT:

120 MPH ULTIMATE DESIGN WIND SPEED NOTES FOR LESS THAN 30' MEAN ROOF HEIGHT:

1. BIGNEER'S SEAL APPLIES ONLY 10
5 PRICINEAL COMPANIES INSENSERYS SEAL DOES NOT CERTIFY DIPENSIONAL ACQUARTOR ACCEPTION OF ARCHITECTURAL LAYOUT NELLIDING ROOF SYSTEM.

2. STRUCTURAL DESIGNEER NORTH CAROLINA RESIDENTIAL CODE, 2019 EDITION.

3. NISTALL IV. "ACCORD POLIT SIGN SON" OF AND UITHIN 1-0" FROM SHO OF EACH CONNER.

ANCIONE TO FROM SHO OF EACH CONNER.

ANCIONE SIGN SIGNED OF EACH CONNER.

ANCIONE SIGN SIGNED OF FLATE UITHIN THE ACCORDING SIGNED OF FLATE UITHIN THE ACCORDING SIGNED FOR MISS PER AD -30 PER FOR MISS PER AD -30 PER FOR MISS PER AD -30 PER FOR ROOF PITCHES 101 TO 107.

AND HAND SIGNED SIGNED FOR MISS PER AD -30 PER FOR ROOF PITCHES 102 TO 107.

AND HAND SIGNED SIGNED FOR MISS PER AD -30 PER FOR ROOF PITCHES 102 TO 107.

AND HAND SIGNED SIGNED FOR MISS PER AD -30 PER FOR ROOF PITCHES 102 TO 107.

AND HAND SIGNED SIGNED FOR MISS PER AD -30 PER FOR ROOF PITCHES 102 TO 107.

AND HAND SIGNED SIGNED FOR MISS PER AD -30 PER FOR ROOF PITCHES 102 TO 107.

AND HAND SIGNED SIGNED FOR MISS PER AD -30 PER FOR ROOF PITCHES 102 TO 107.

BEREY STRUCKES ON EACH SIGNED SIGNED

ENGINEERING, INC 606 WADE AVE, SUITE OF RALEIGH, NC 27605 PHONE; (919) 7899919 FAX, (919) 7899921 N.C. LICENSE NO.: C1733

SOUTHPORT H&H HOMES

DATE: NOVEMBER 2, 2021


SCALE: 1/4" = 1'-0"

DRAWN BY: H&H HOMES

ENGINEERED BY: WFB

SHEET: 2 OF: 9 S-1b MONO SLAB FOUNDATION PLAN

SEAL 33736

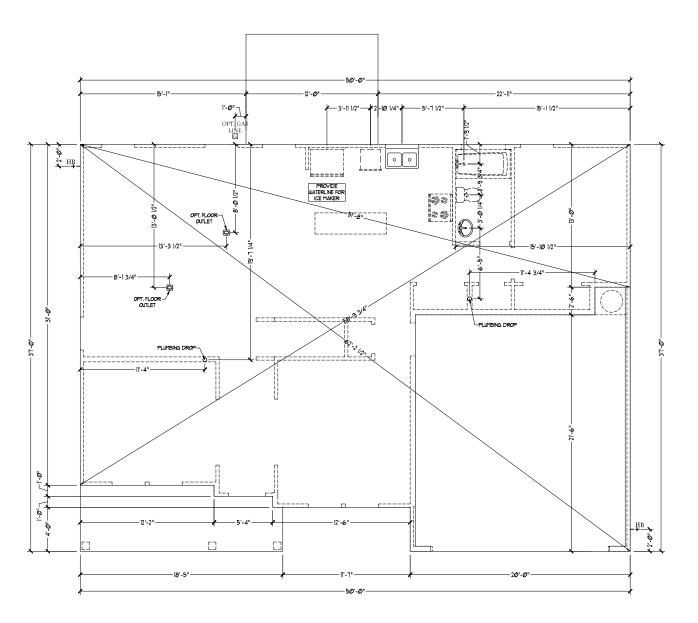

Slab Interface Plan

SCALE: 1/4"=1'-0" ON 22x34 AND 1/8"=1'-0" ON 11x17



TERIALS AND DIMENSIONS ARE SUBJECT TO CHANGE THOUT TONICE SOUMER CONTIGATE AND DIMENSINA ARE ESTIMATED AND MAY VARYIN ACTUAL WISTRUCTON. ACTUAL POSITION OF HOUSE ON LOT BE DETERMINED THE HEST ENDA MOD FOT PLAN, OF PLANS AND ELEVITRY REDUCENINGS ARE ARTEST WIGESTRONS. FLOOR PLANS ARE THE COPYRISHTED

H&H HOMES, INC SOUTHPORT

DATE: SEPTEMBER 16, 2019
REV.: AUGUST 01, 2021


SCALE: 1/4"=1'-0"


SCALE: 1/4"=1 DRAWN BY:

ENGINEERED BY:

REVIEWED BY:

SLAB INTERFACE PLAN

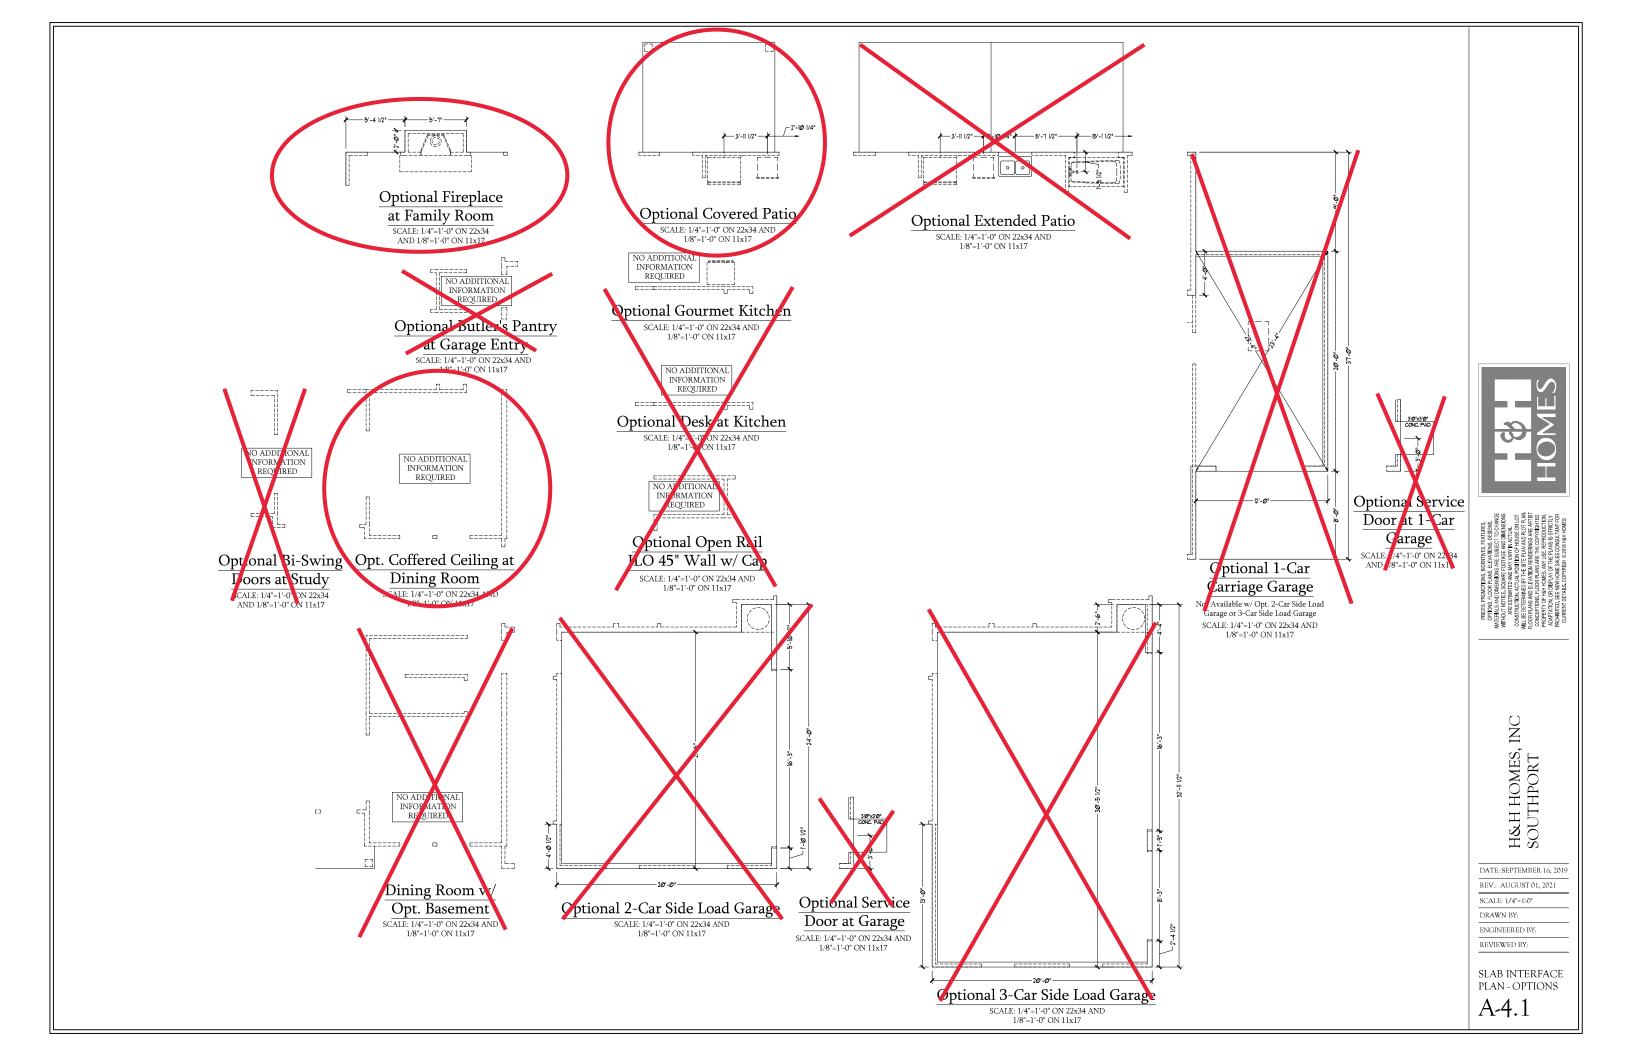

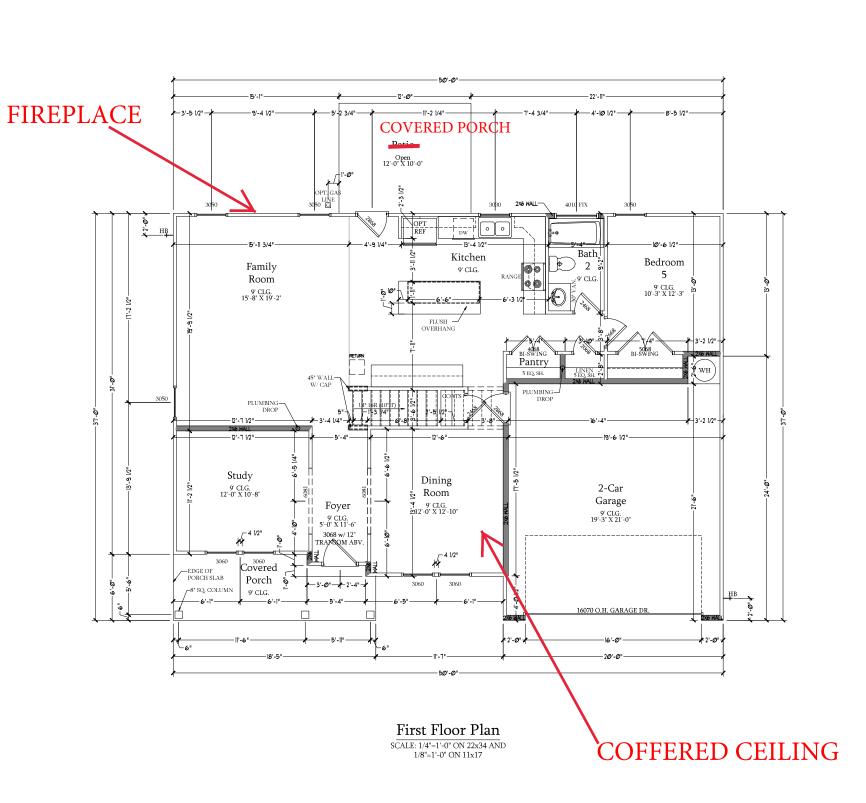

SQUARE FOOTAGE ist FLOOR: 2nd FLOOR: TOTAL: GARAGE: FRONT PORCH: PATIO: 1,317 5Q, FT. IST FLOOR OPTIONS
OPTIONAL FIREPLACE:
IST FLOOR W/ OPT, BASEMENT: 10 SQ. FT. 32 SQ. FT. 32 SQ. FT. UNIEATED OPTIONS OPT. 1-CAR GARAGE: OPT. 3-CAR GARAGE: OPT. COVERED PATIO: 240 9Q. FT. 609 9Q. FT. 120 9Q. FT. 120 9Q. FT.

OPT. EXTENDED PATIO:

SQUARE FOOTAGE W/ BRICK VENEER ist FLOOR: 2nd FLOOR: TOTAL: GARAGE: FRONT PORCH: PATIO: 1,317 5Q, FT. 25 SQ. FT. UNHEATED OPTIONS
OPT. I-CAR GARAGE:
OPT. 3-CAR GARAGE:
OPT. COVERED PATIO:
OPT. EXTENDED PATIO: 258 SQ. FT. 636 SQ. FT. 120 SQ. FT. 120 SQ. FT.



H&H HOMES, INC SOUTHPORT


DATE: SEPTEMBER 16, 2019 REV.: AUGUST 01, 2021


SCALE: 1/4"=1'-0"

DRAWN BY:

ENGINEERED BY: REVIEWED BY:

FIRST FLOOR PLAN

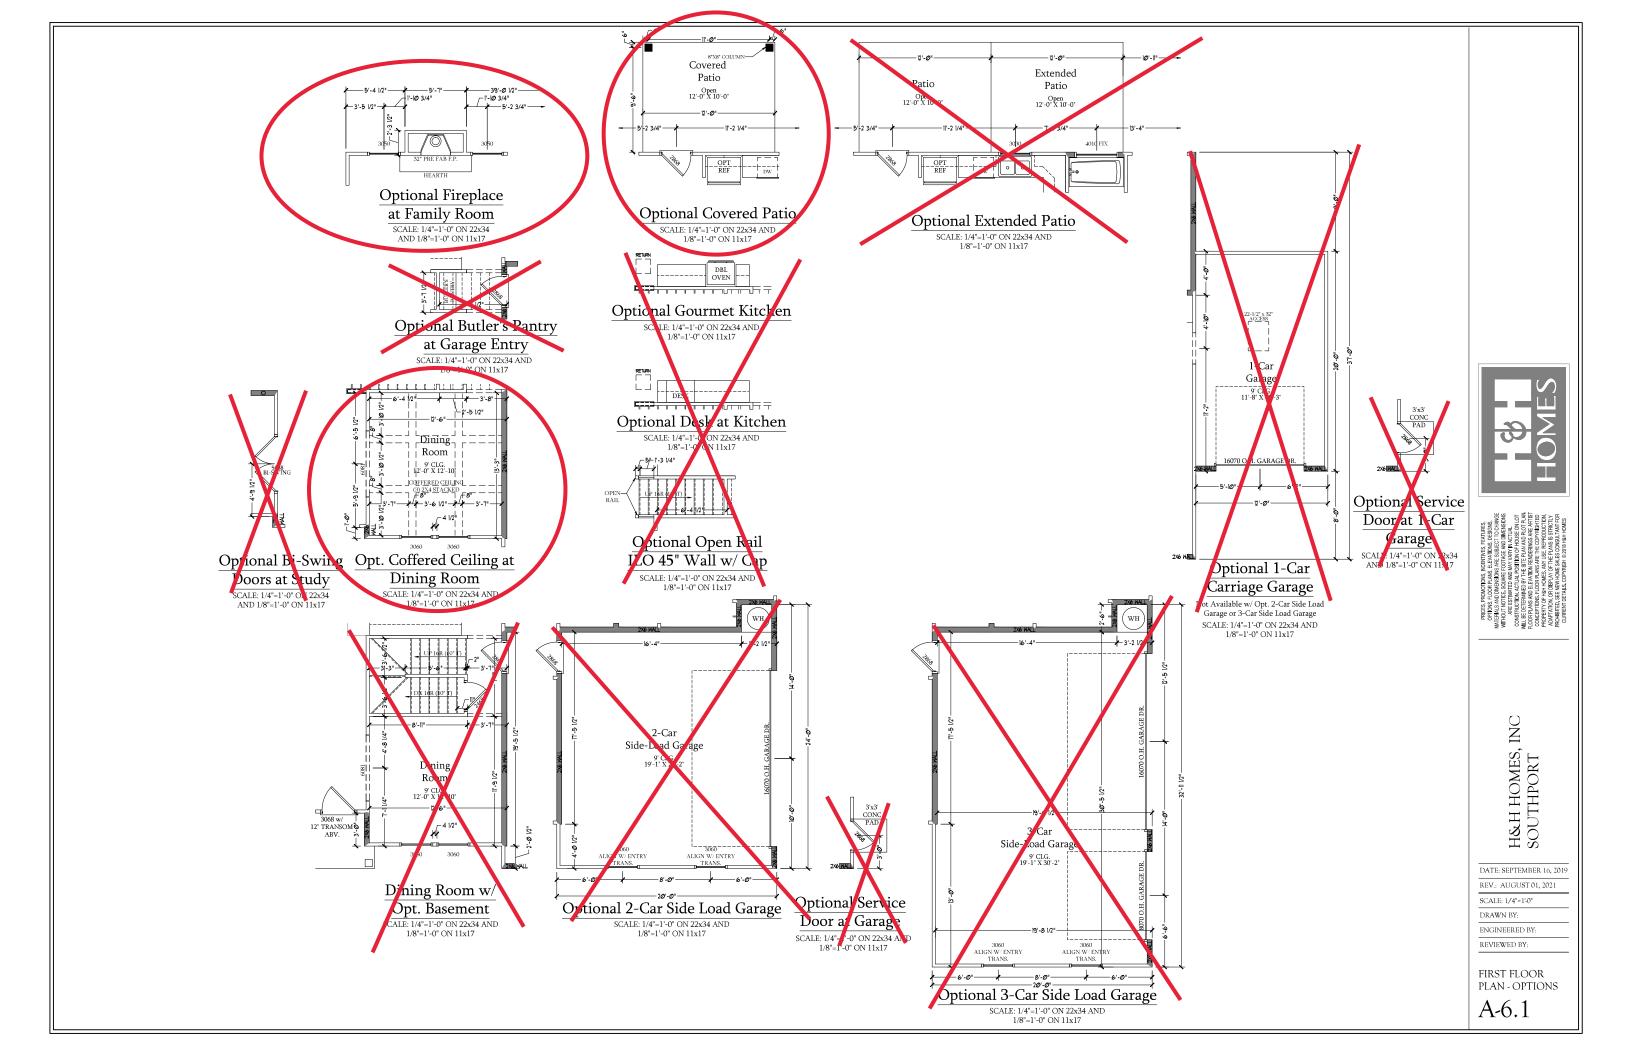

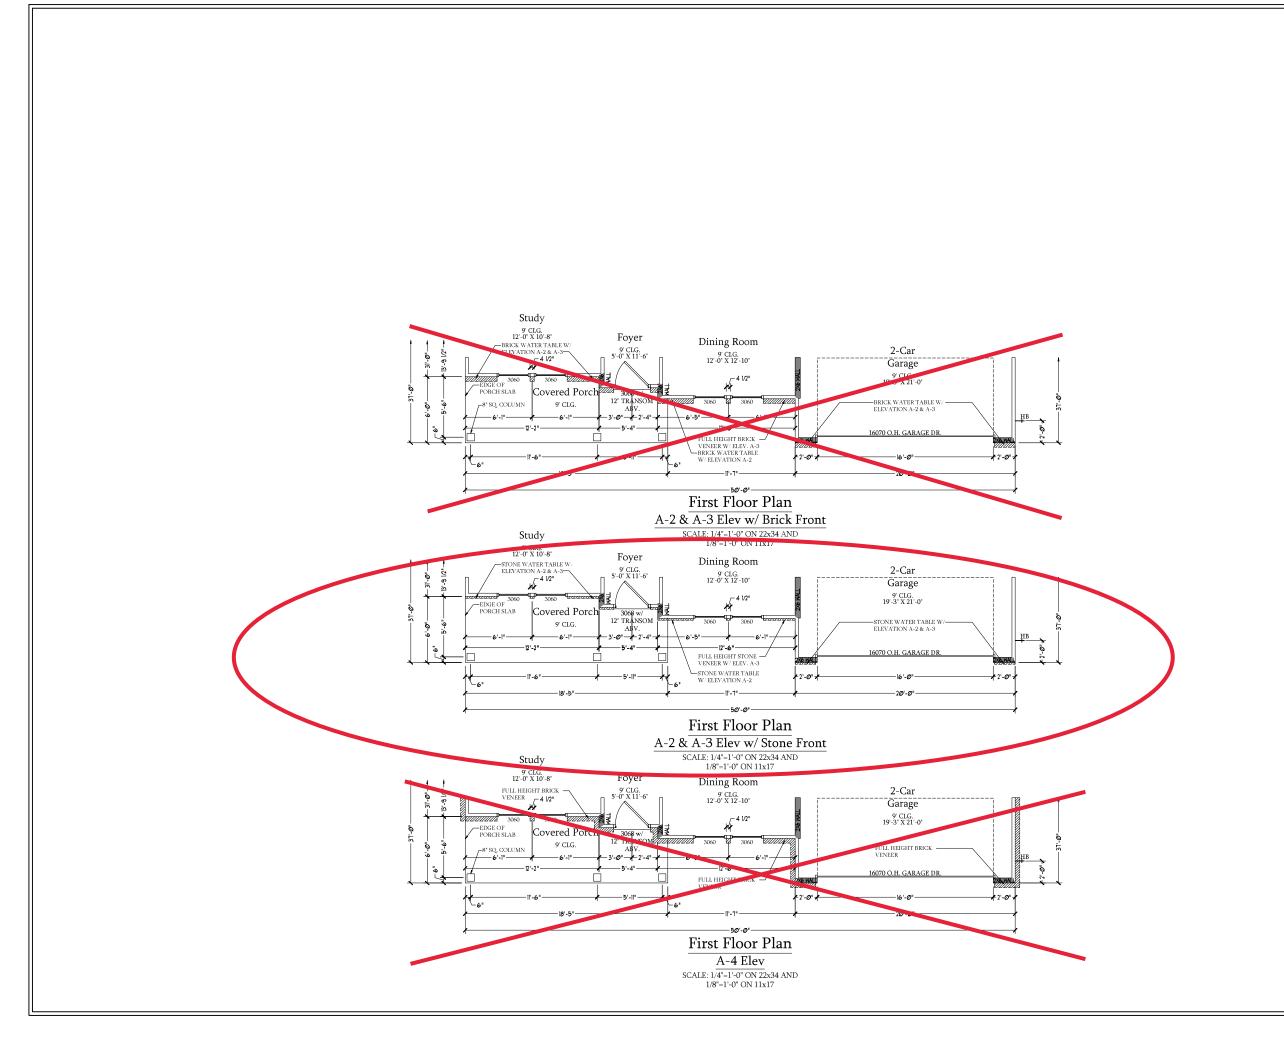



THE STATE OF THE S

H&H HOMES, INC SOUTHPORT

DATE: SEPTEMBER 16, 2019 REV.: AUGUST 01, 2021

SCALE: 1/4"=1'-0"

SCALE: 1/4"=1".


DRAWN BY:

ENGINEERED BY:

REVIEWED BY:

A ELEVATION FIRST FLOOR

PARTIAL PLANS
A-6.2

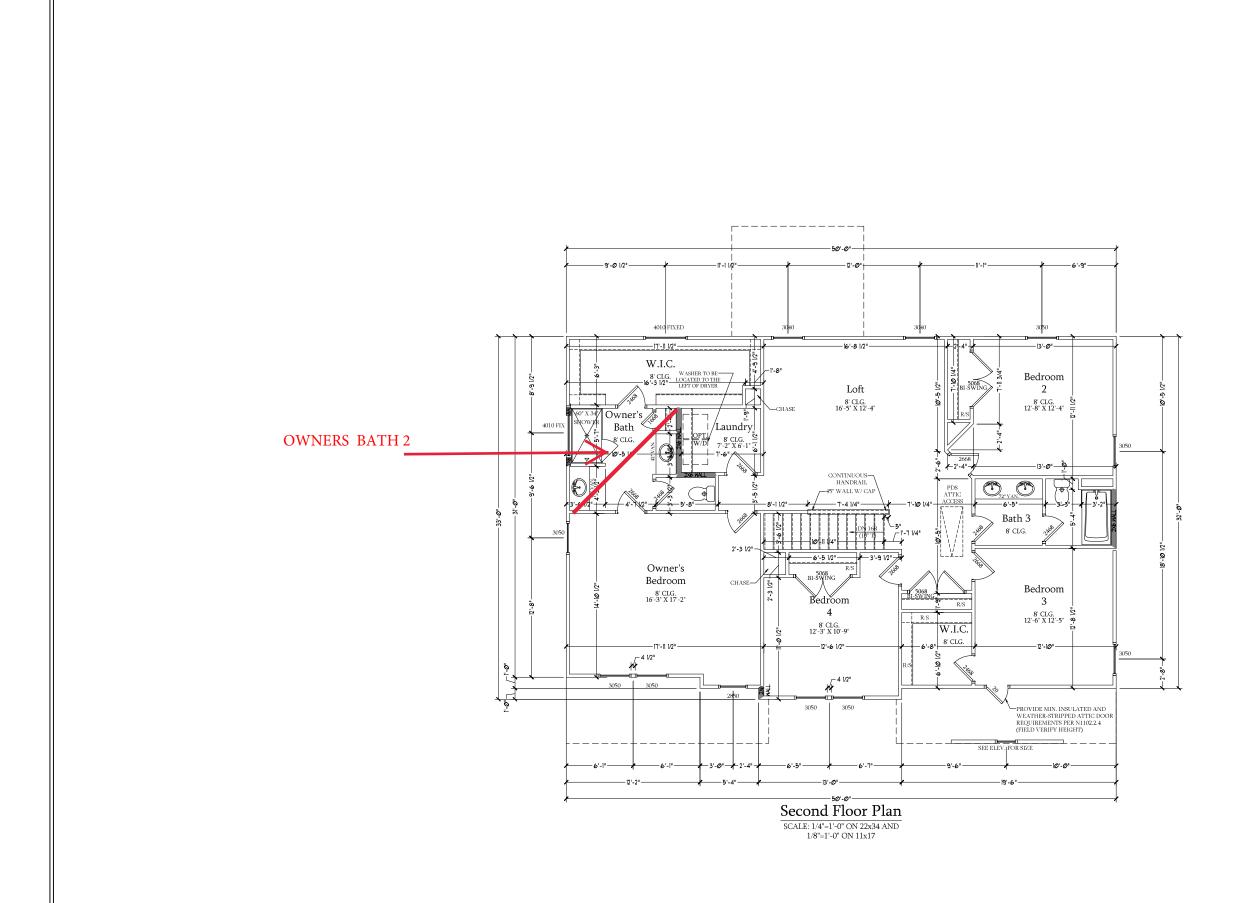



H&H HOMES, INC SOUTHPORT


DATE: SEPTEMBER 16, 2019 REV.: AUGUST 01, 2021


SCALE: 1/4"=1'-0"


DRAWN BY: ENGINEERED BY:

REVIEWED BY:

SECOND FLOOR PLAN

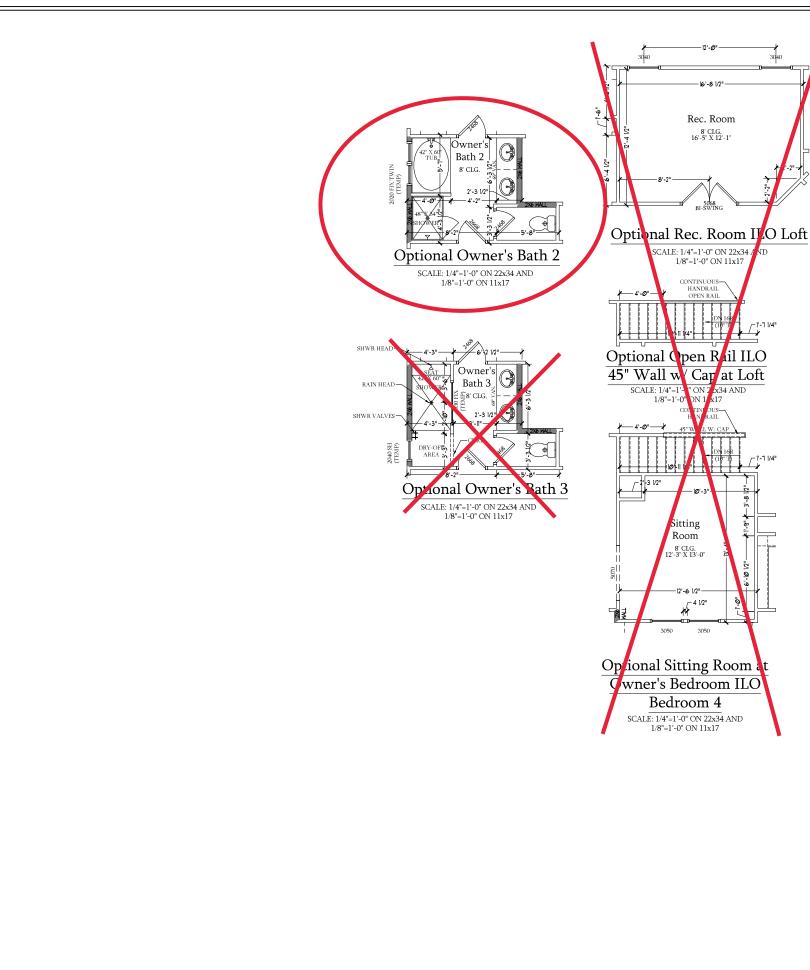







Optional Open Rail ILC 45" Wall w/ Cap at Loft w/ Opt. Basement

CALE: 1/4"=1'-0" ON 22x3 1/8"=1'-0" ON 11x17




Bedroom 4 w/ Opt.

Basement

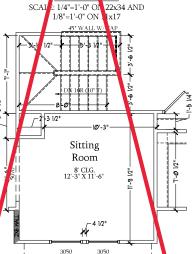

Optional Sitting Room at Owner's Bedroom ILO Bedroom 4 w/ Opt Basement


SCALE: 1/4"=1'-0" ON 22x34 AND 1/8"=1'-0" ON 11x17

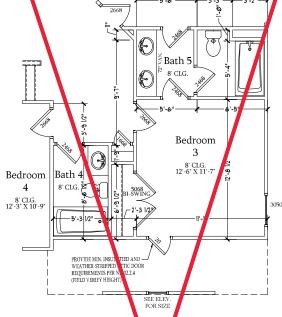

Opt. Bath w/Bedroom 3

& Bath 4

SCALE: 1/4"=1 0 ON 22x34 AND 1/8"=1'-0 ON 11x17

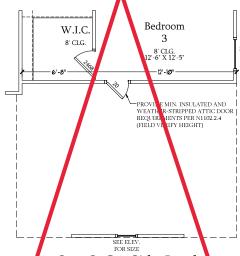

Opt. 3-Car Side-Load Garage

SCALE: 1/4"=1'-0" ON 22x34 AND 1/8"=1'-0" ON 11x17



H&H HOMES, INC SOUTHPORT

DATE: SEPTEMBER 16, 2019 REV.: AUGUST 01, 2021


SCALE: 1/4"=1'-0"


DRAWN BY: ENGINEERED BY:

REVIEWED BY:

SECOND FLOOR PLAN - OPTIONS

A-7.1

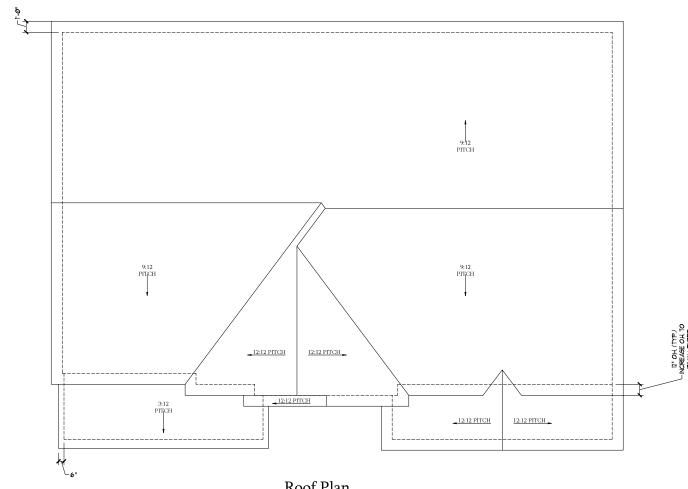

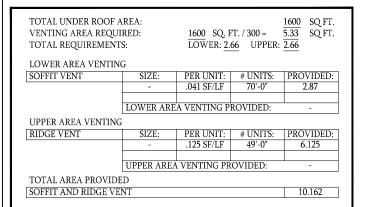

Roof Plan Elevation A & B SCALE: 1/4"=1"-0" ON 22x34 AND 1/8"=1"-0" ON 11x17



THEN AS AND UNDERSTORA AGE AND UNDERSTORA AND UNDERSTORATIONAL AND UNDERSTORATION

H&H HOMES, INC SOUTHPORT

DATE: SEPTEMBER 16, 2019 REV.: AUGUST 01, 2021

REV.: AUGUS


SCALE: 1/4"=1'-0"

DRAWN BY:

ENGINEERED BY:

REVIEWED BY:

ELEVATIONS A & B ROOF PLAN

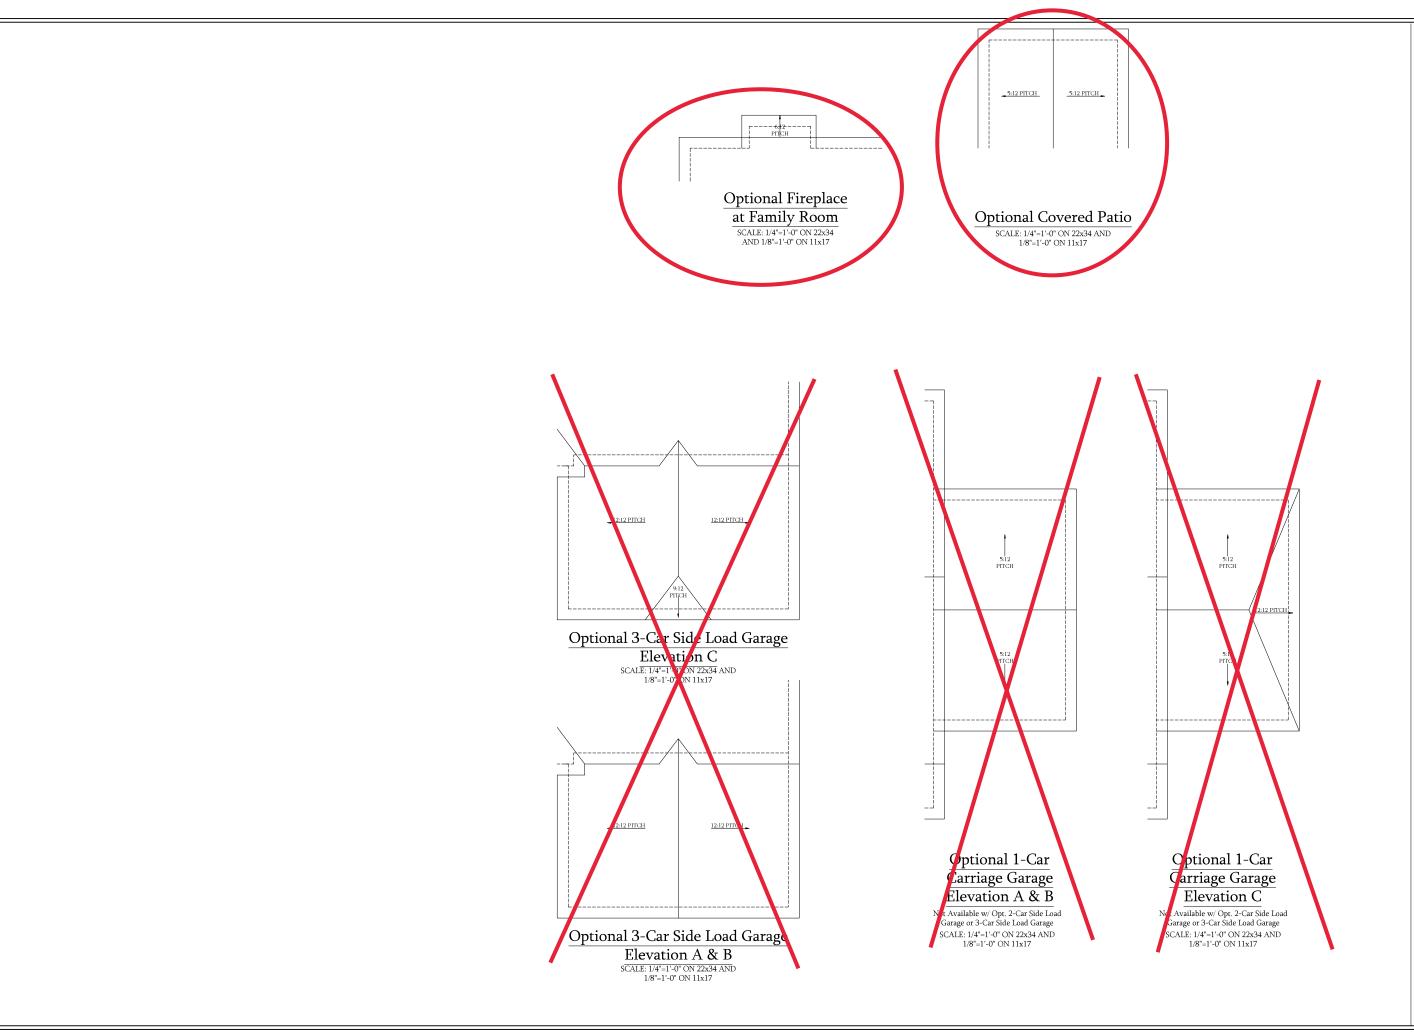



H&H HOMES, INC SOUTHPORT

DATE: SEPTEMBER 16, 2019 REV.: AUGUST 01, 2021


SCALE: 1/4"=1'-0"

DRAWN BY:

ENGINEERED BY: REVIEWED BY:

ROOF PLAN OPTIONS

A-8.2

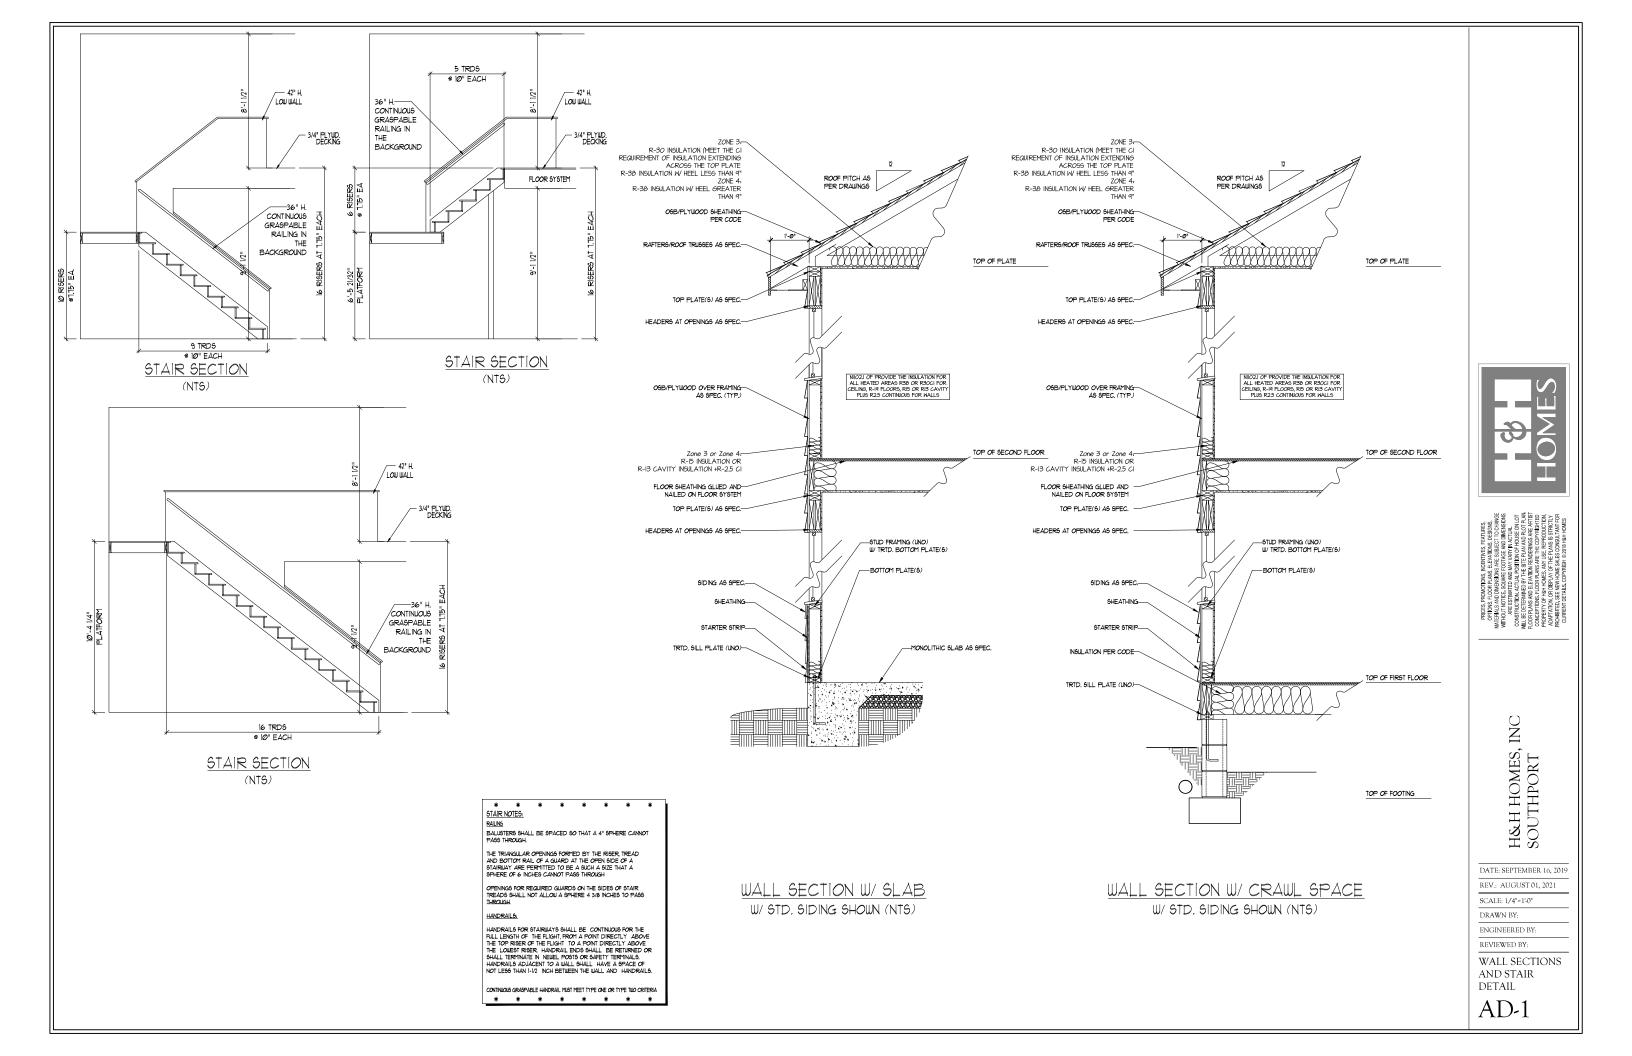


□ 120V OUTLET **★** 120V GFI OUTLET 120V BASEBOARD OUTLET -**₩** FLOOR MOUNTED 120V FLOOR MOUNTED 120V GFI WEATHERPROOF 120V DEDICATED CIRCUIT 220V DEDICATED GIRCUIT SPECIAL PURPOSE (240 V, ETC.) \triangle WALL MOUNT LIGHT \Diamond CEILING MOUNT LIGHT Ф PENDANT LIGHT \Diamond RECESSED CAN LIGHT \bigcirc MINI CAN LIGHT \bigcirc EYEBALL LIGHT FLUORESCENT LIGHT UNDERCABINET LIGHT FLOOD LIGHT SWITCH 3-WAY SWITCH 4-WAY SWITCH TELEPHONE TV-CD-CONDUIT FOR COMPONENT WIRING 6P SPEAKER COMBO SMOKE CARBON MONOXIDE DETECTOR (SID) 110 V SMOKE DETECTOR EXHAUST FAN LOW VOLTAGE PANEL

ELECTRICAL LEGEND

ELECTRICAL NOTES:

- PROVIDE AND INSTALL GROUND FAULT
 CIRCUIT-INTERRUPTERS (G.F.L) AS INDICATED
 ON PLANS OR AS ITEM NO. 4 AND 5 BELOW
 INDICATES.
- 3. ALL SMOKE DETECTORS SHALL BE HARDWIRED INTO AN ELECTRICAL POWER SOURCE AND SHALL BE EQUIPPED WITH A MONITORED BATTERY BACKUP, PROVIDE AND INSTALL LOCALLY CERTIFIED SMOKE DETECTORS.
- 4. ALL 15A AND 20A RECEPTACLES IN SLEEPING ROOMS, FAMILY ROOMS, DINING ROOMS, LIVING ROOMS, PARLORS, LIBRARIES, DENS, SUNROOMS, RECREATION ROOMS, CLOSETS, HALLWAYS, AND SIMILAR AREAS WILL REQUIRE A COMBINATION TYPE A.E.C. DEVICE AND TAMPER-PROOF RECEPTACLES.
- 5. ALL 15A AND 20A 120V RECEPTACLES LOCATED IN THE GARAGE AND UTILITY ROOMS SHALL BE G.F.C.I. PROTECTED (G.F.I).
- 6. IT IS THE RESPONSIBILITY OF THE LICENSED ELECTRICIAN TO ENSURE THAT ALL ELECTRICAL WORK IS IN FULL COMPLIANCE WITH ALL APPLICABLE LOCAL STANDARDS, CODES, AND ORDINANCES.
- 7. EVERY BUILDING HAVING A FOSSIL-FUEL-BURNING HEATER OR APPLIANCE, FIREPLACE, OR AN ATTACHED GARAGE SHALL HAVE AN OPERATIONAL CABBON MONOXIDE DETECTOR INSTALLED WITHIN 10 FEET OF EACH ROOM USED FOR SLEEPING PURPOSES.
- FOR SELECTION FUNCIONS.

 8. ALARMS SHALL RECEIVE THEIR PRIMARY POWER
 FROM THE BUILDING WIRING WHEN SUCH
 WIRING IS SERVED FROM THE LOCAL FOWER
 UTILITY, SUCH ALARMS SHALL HAVE BATTERY
 BACKLIP, COMBINATION SHOKE CARBON
 MONOXIDE ALARMS SHALL BE LISTED OR LABELED
 BY A NATIONALLY RECOGNIZED TESTING
 LABORATORY.

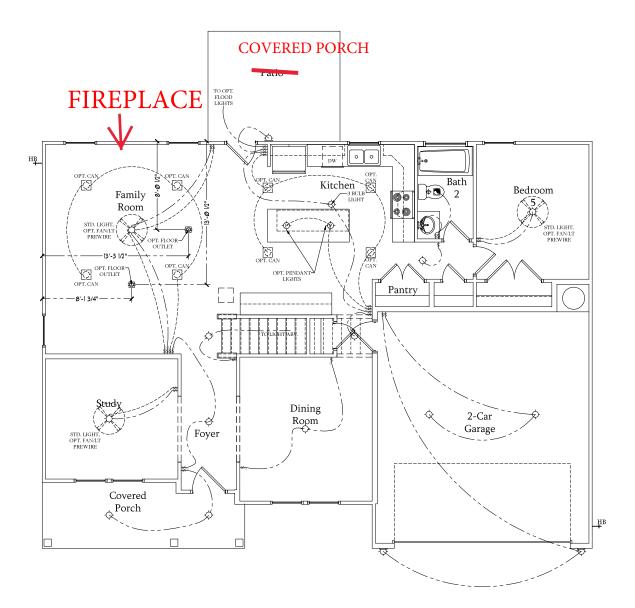

First Floor Plan
SCALE: 1/4"=1'-0" ON 22x34 AND
1/8"=1'-0" ON 11x17



FOUT NOTICE, SQUARE FOOTAGE AND DMENSIONS
ARE ESTINATED AND WAY WATH MACUNA
STRUCTION, ACTUAL POSITION OF HOUSE ON UN
SEDETERMINED BY THE SITE PLAN AND PLOT PLAN
R PLANS AND ELEN/TIN PROBERBINGS ARE ARTIST
CEPTIONS, FLOOR PLANS ARE THE COPPRISHTED
PERTY OF HAM HOMES, ANY USE, REPRODUCTION.

H&H HOMES, INC SOUTHPORT

DATE: SEPTEMBER 16, 2019 REV.: AUGUST 01, 2021

SCALE: 1/4"=1'-0"


SCALE: 1/4"=1 DRAWN BY:

ENGINEERED BY:

REVIEWED BY:

FIRST FLOOR ELECTRICAL PLAN

E-1

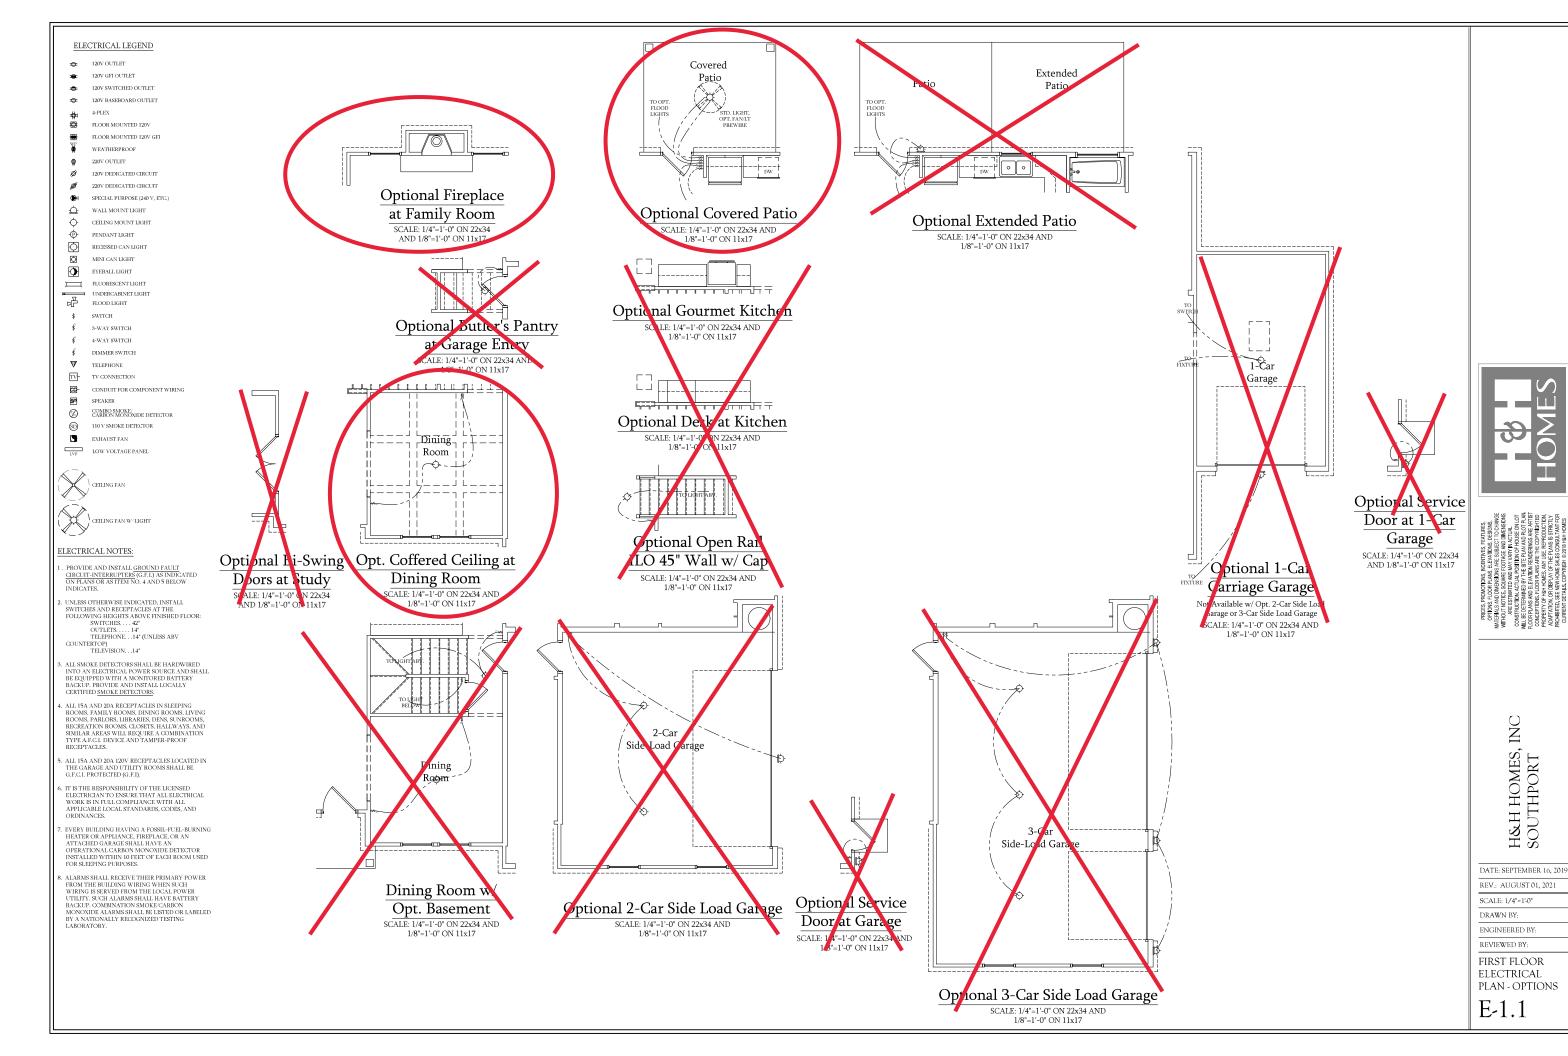


H&H HOMES, INC SOUTHPORT



ELECTRICAL NOTES:

- PROVIDE AND INSTALL GROUND FAULT
 CIRCUIT-INTERRUPTERS (G.F.L) AS INDICATED
 ON PLANS OR AS ITEM NO. 4 AND 5 BELOW
 INDICATES.
- 3. ALL SMOKE DETECTORS SHALL BE HARDWIRED INTO AN ELECTRICAL POWER SOURCE AND SHALL BE EQUIPPED WITH A MONITORED BATTERY BACKUP, PROVIDE AND INSTALL LOCALLY CERTIFIED SMOKE DETECTORS.
- 4. ALL 15A AND 20A RECEPT ACLES IN SLEEPING ROOMS, FAMILY ROOMS, DINING ROOMS, LIVING ROOMS, PARLORS, LIBRARIES, DENS, SUNROOMS, RECREATION ROOMS, CLOSETS, HALLWAYS, AND SIMILAR AREAS WILL REQUIRE A COMBINATION TYPE A.F.C.I. DEVICE AND TAMPER-PROOF RECEPTACLES.
- 5. ALL 15A AND 20A 120V RECEPTACLES LOGATED IN THE GARAGE AND UTILITY ROOMS SHALL BE G.F.C.I. PROTECTED (G.F.I).
- 6. IT IS THE RESPONSIBILITY OF THE LICENSED ELECTRICIAN TO ENSURE THAT ALL ELECTRICAL WORK IS IN FULL COMPLIANCE WITH ALL APPLICABLE LOCAL STANDARDS, CODES, AND ORDINANCES.
- 7. EVERY BUILDING HAVING A FOSSIL-FUEL-BURNING HEATER OR APPLIANCE, FIREPLACE, OR AN ATTACHED GARAGE SHALL HAVE AN OPERATIONAL CARBON MONOXIDE DETECTOR INSTALLED WITHIN 10 FEET OF EACH ROOM USED FOR SLEEPING PURPOSE.
- 8. ALARNIS SHALL RECEIVE THEIR PRIMARY POWER FROM THE BUILDING WIRING WHEN SUCH WIRING IS SERVED FROM THE LOCAL POWER UTILITY. SUCH ALARNIS SHALL HAVE BATTERY BACKUP, COMBINATION SMOKE/CARRON MONOXIDE ALARMS SHALL BE LISTED OR LABELED BY A NATIONALLY RECOGNIZED TESTING LABORATORY.

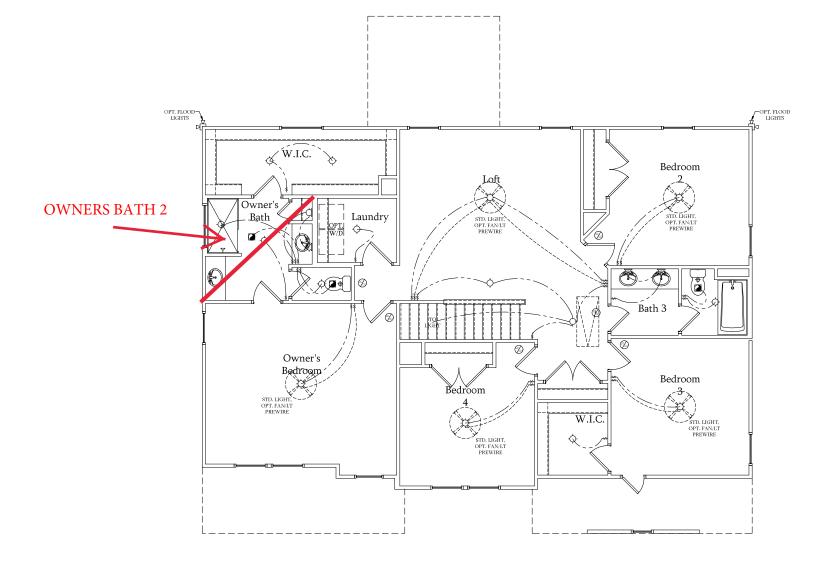

Second Floor Plan

SCALE: 1/4"=1'-0" ON 22x34 AND 1/8"=1'-0" ON 11x17



ITHOUT NOTICE, SOUME FOOTAGE, AND DMENSIONS
AFRE SEINATED AND UNIVARIEN MOTULA.
AFRE SEINATED AND UNIVARIEN MOTULA.
BUL BE DETERMINED BY THE SITE PLAN AND PLOT PLAN
CORP. HANN AND CENTURINE NEUDERINGS, REGISTE
ONDERTOUS, FLOOR PLANS ARE THE COPPRIGHTED
ROPERTY OF HAN HOMES, ANY USE, REPRODUCTION.

H&H HOMES, INC SOUTHPORT

DATE: SEPTEMBER 16, 2019 REV.: AUGUST 01, 2021

SCALE: 1/4"=1'-0"

SCALE: 1/4"=1'-0" DRAWN BY:

ENGINEERED BY:

REVIEWED BY:

SECOND FLOOR ELECTRICAL PLAN

E-2



- -
- 120V GFI OUTLET
- 120V BASEBOARD OUTLET
- - 1 FLOOR MOUNTED 120V
- FLOOR MOUNTED 120V GFI
- WEATHERPROOF
- 120V DEDICATED CIRCUIT
- 220V DEDIGATED CIRCUIT
- SPECIAL PURPOSE (240 V, ETC.)
- ሷ WALL MOUNT LIGHT
- \Diamond CEILING MOUNT LIGHT
- PENDANT LIGHT
- Ф
- \Diamond RECESSED CAN LIGHT
- \odot MINI CAN LIGHT
- EYEBALL LIGHT FLUORESCENT LIGHT
- UNDERCABINET LIGHT
 FLOOD LIGHT
- SWITCH
- 3-WAY SWITCH
- 4-WAY SWITCH
- TELEPHONE
- TV-CD-CONDUIT FOR COMPONENT WIRING
- SP SPEAKER
- COMBO SMOKE/ CARBON MONOXIDE DETECTOR \oslash
- (SID) 110 V SMOKE DETECTOR
- EXHAUST FAN
- LOW VOLTAGE PANEL



ELECTRICAL NOTES:


- PROVIDE AND INSTALL GROUND FAULT CIRCUIT-INTERRUPTERS (G.F.L.) AS INDICATED ON PLANS OR AS ITEM NO. 4 AND 5 BELOW

- . ALL SMOKE DETECTORS SHALL BE HARDWIRED INTO AN ELECTRICAL POWER SOURCE AND SHALL BE EQUIPPED WITH A MONTFORED BATTERY BACKUP, PROVIDE AND INSTALL LOCALLY CERTIFIED $\underline{\text{SMOKE DETECTORS}}.$
- ALL 15A AND 20A RECEPTACLES IN SLEEPING ALL 15A AND 20A RICEPTACLES IN SLEEPING ROOMS, FAMILY ROOMS, DINING ROOMS, FUND ROOMS, PARLORS, LIBRARIES, DENS, SUNROOMS, RECREATION ROOMS, CLOSETS, HALLWAYS, AND SIMILAR AREAS WILL REQUIRE A COMBINATION TYPE A F.C. L DEVICE AND TAMPER-PROOF RECEPTACLES.
- ALL 15A AND 20A 120V RECEPTACLES LOCATED IN THE GARAGE AND UTILITY ROOMS SHALL BE G.F.C.I. PROTECTED (G.F.I).
- I. IT IS THE RESPONSIBILITY OF THE LICENSED ELECTRICIAN TO ENSURE THAT ALL ELECTRICAL WORK IS IN FULL COMPLIANCE WITH ALL APPLICABLE LOCAL STANDARDS, CODES, AND ORDINANCES.
- EVERY BUILDING HAVING A FOSSIL-FUEL-BURNING EVERT BUILDING HAVING A POSSIL-PUEL-BURNI HEATER OR APPLIANCE, FIREPLACE, OR AN ATTACHED GARAGE SHALL HAVE AN OPERATIONAL CARBON MONOXIDE DETECTOR INSTALLED WITHIN 10 FEET OF EACH ROOM USED FOR SLEEPING PURPOSES.
- ALARMS SHALL RECEIVE THEIR PRIMARY POWER ALARMS SHALL RELEAVE I HERE PRIMARY FOW ER FROM THE BUILDING WIRING WHEN SECH WIRING IS SERVED FROM THE LOCAL FOWER UTILITY, SECH ALARMS SHALL HAVE BATTERY BACKLY COMBINATION SMOKE CARBOON MONOXIDE ALARMS SHALL BE LISTED OR LABELED BY A NATIONALLY RECOGNIZED TESTING LABORATORS.





1/8"=1'-0" ON 11x17




Optional Rec. Room

LE: 1/4"=1'-0" ON 22x34 1/8"=1'-0" ON 11x17




45" Wall w/ Car at Loft SCALE: 1/4"=1'-0" O. 72x34 AND 1/8"=1'-0" ON




Optional Sitting Room at Owner's Bedroom ILO Bedroom 4 SCALE: 1/4"=1'-0" ON 22x34 AND

1/8"=1'-0" ON 11x17




Optional Open Rail II/O 45" Wall w/ Cap at Loft w/ Opt. Basement

ALE: 1/4"=1'-0" ON 22 34 AND




Bed oom 4 w/Opt. Basement

E: 1/4"=1'-0" ON 22x34 1/8"=1'-0" ON 11x17




Optional Sitting Room at Owner's Bedroom ILO Bedroom 4 w/ Opt Basement

SCALE: 1/4"=1'-0" ON 22x34 AND 1/8"=1'-0" ON 11x17

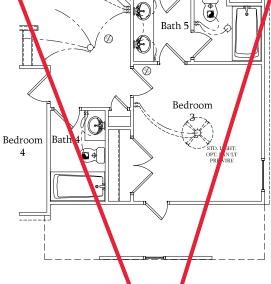

Opt. Bath 5 w/ Bedroom 3 & Bath 4

SCALE: 1/4"= 1-0" Of 22x34 AND

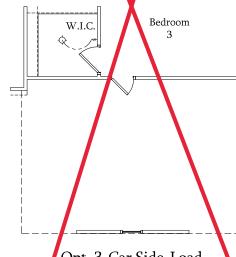

Opt. 3-Car Side-Load Garage

SCALE: 1/4"=1'-0" ON 22x34 AND 1/8"=1'-0" ON 11x17

H&H HOMES, INC SOUTHPORT

DATE: SEPTEMBER 16, 2019 REV.: AUGUST 01, 2021


SCALE: 1/4"=1'-0"

DRAWN BY:

ENGINEERED BY: REVIEWED BY:

SECOND FLOOR ELECTRICAL PLAN - OPTIONS

E-2.1

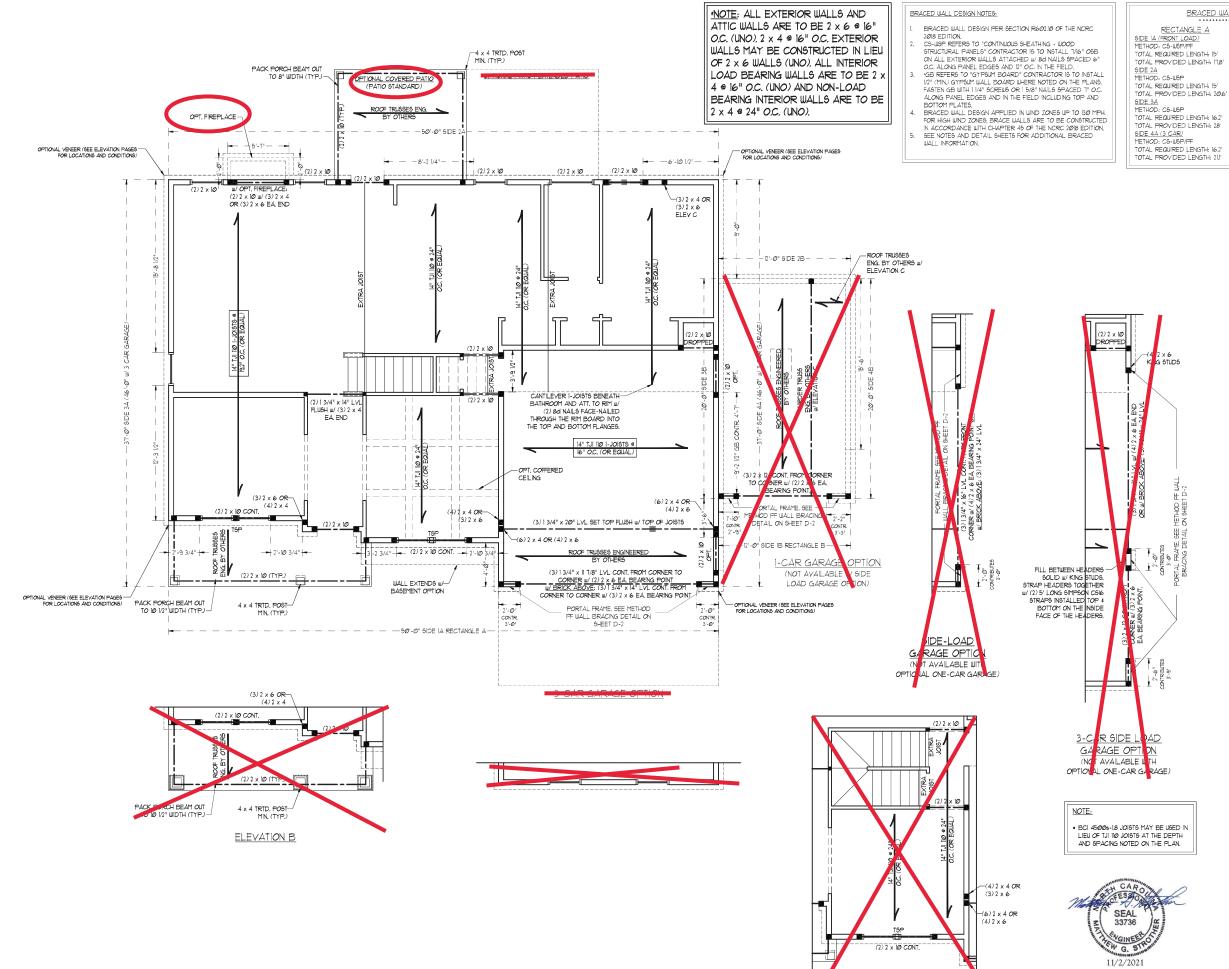

DIVING ROOM W/ OPTIONAL BASEMEN

BRACED WALL DESIGN

RECTANGLE B

TOTAL PROVIDED LENGTH: 1181

TOTAL PROVIDED LENGTH: 28' TOTAL PROVIDED LENGTH: 15,58'

METHOD: PF/C5-WSP TOTAL REQUIRED LENGTH: 2.85 TOTAL PROVIDED LENGTH: 61 METHOD: CS-WSP

TOTAL REQUIRED LENGTH: 2,85" TOTAL PROVIDED LENGTH: 121 SIDE 3B / SIDE 4A CUMULATIVE METHOD: C6-U6P/GB TOTAL REQUIRED LENGTH: 1831 TOTAL PROVIDED LENGTH: 21,11 SIDE 4B METHOD: CS-WSP TOTAL REQUIRED LENGTH: 2,1'



27605 27605 » NC

ഗ **D** 0 5 RIN RALEI 104 RALEI 109 FAX: (9) ISE NO.: C-17 五四 NG WADE.

VШ

SOUTHPORT H&H HOMES

8 AND GREATER BRICK SUPPORT NOTES:

LENGTH (FT.)

UP TO 4 FT

4-8

LINTEL SCHEDULE APPLIES TO ALL OPENINGS IN BRICK VENEER (UNO), SEE ARCH DUGS, FOR SIZE AND LOCATION OF OPENINGS.

LINTEL SCHEDULE FOR

SIZE OF LINTEL

1 3 1/2 x 3 1/2 x 1/4

L 5 x 3 l/2 x 5/l6 LLV

L 6 x 4 x 5/16 LLV

BRICKNATURAL STONE SUPPORT

- OPENINGS.
 (LLV) = LONG LEG VERTICAL
 LENGTH = CLEAR OPENING
 EMBED ALL ANGLE IRONS MIN. 4" EACH
 SIDE INTO VENEER TO PROVIDE BEARING. FOR ALL HEADERS 8'-0" AND GREATER IN LENGTH, ATTACH STEEL ANGLE TO
- IN LENGTH, ATTACH STEEL ANGLE TO HEADER W/ 1/2" LAG SCREWS ® 12" O.C. STAGGERED. FOR ALL BRICK SUPPORT ® ROOF LINES, FASTEN (2) 2 x 10 BLOCKING BETWEEN
- STUDS w/ (4) 12d NAILS PER PLY, FASTEN Δ 6" x 4" x 5/16" STEEL ΔNGLE TO (2) 2 x A 6" X 4" X 5716" 51EEL ANGLE 10 (27 Z X 10 BLOCKING W (2) I/2" LAG SCREWS = 12" O.C. STAGGERED, SEE SECTION R103.82.1 OF THE 2018 NCRC FOR ADDITIONAL BRICK SUPPORT INFORMATION.
- PRECAST REINFORCED CONCRETE LINTELS ENGINEERED BY OTHERS MAY BE USED IN LIEU OF STEEL LINTELS.

STRUCTURAL NOTES:

- ALL FRAMING LUMBER TO BE SPF 12 (UNO.). ALL TREATED LUMBER TO BE SYP 12 (UNO.). ALL LOAD BEARING HEADERS TO BE (2) 2 x 6
- WINDOW AND DOOR HEADERS TO BE SUPPORTED W/ (1) JACK STUD AND (1) KING STUD EA. END (UNO.). SEE TABLE R602.15 FOR
- ADDITIONAL KING STUD REQUIREMENTS.
 SQUARES DENOTE POINT LOADS WHICH REQUIRE
 SOLID BLOCKING TO GIRDER OR FOUNDATION. ALL SQUARES TO BE (2) STUDS (UNO.)
- FOR HIGH WIND ZONES, ALL EXTERIOR WALLS TO BE SHEATHED WITH 1/6" 09B SHEATHING WITH JOINTS BLOCKED AND SECURED WITH 80 NAILS AT 3" O.C. ALONG EDGES AND 6" O.C. IN THE FIELD. FOR HIGH WIND ZONES, SECURE ALL EXTERIOR
- WALL SHEATHING PANELS TO DOUBLE TOP PLATES, BANDS, JOISTS, AND GIRDERS WITH (2) ROWS OF 8d NAILS STAGGERED AT 3" O.C. PANELS SHALL EXTEND 12" BEYOND CONSTRUCTION JOINTS AND SHALL OVERLAF GIRDERS AND DOUBLE SILL PLATES THEIR FULL DEPTH.
 ALL 4 x 4 POSTS SHALL BE ANCHORED TO
- SLABS w/ SIMPSON ABU44 POST BASES (OR EQUAL) AND 6 x 6 POSTS W/ ABU66 POST BASES (OR EQUAL) (UNO). ALL 4 x 4 AND 6 x 6 POSTS TO BE INSTALLED WITH 100 LB CAPACITY UPLIFT CONNECTORS AT TOP (UNO.)
- FOR FIBERGLASS, ALUMINUM, OR COLUMN ENG. BY OTHERS, SECURE TO SLAB w/ (2) METAL ANGLES USING 2" CONC. SCREWS. FASTEN ANGLES TO COLUMNS W/ 1/4" THROUGH BOLTS W/ NUTS AND MASHES. LOCATE ANGLES ON OPPOSITE SIDES OF COLUMN. THROUGH BOLTS MUST BE INSTALLED PRIOR TO SETTING COLUMN.
- REFER TO NOTES AND DETAIL SHEETS FOR ADDITIONAL STRUCTURAL INFORMATION.

"TSP" INDICATES TRIPLE STUD POCKET BETWEEN WINDOW UNITS.

TABLE R60215 MINIMUM NUMBER OF FULL HEIGHT STUDS AT EACH END OF HEADERS IN EXTERIOR WA


ALL THOU TIES OF LITTABLISO IN EXITINGLY MATER					
MAXIMUM STUD SPACING (INCHES) (PER TABLE R602.3(5)					
16	24				
1	1				
2	1				
3	2				
5	3				
6	4				
	MAXIMUM STUD S (PER TABLE) 16 1 2 3 5				

ATE: NOVEMBER 2, 2021 CALE: 1/4" = 1'-0"

DRAWN BY: H&H HOMES NGINEERED BY: WFB

SHEET: 6 OF: 9

S-3 SECOND FLOOR FRAMING PLAN

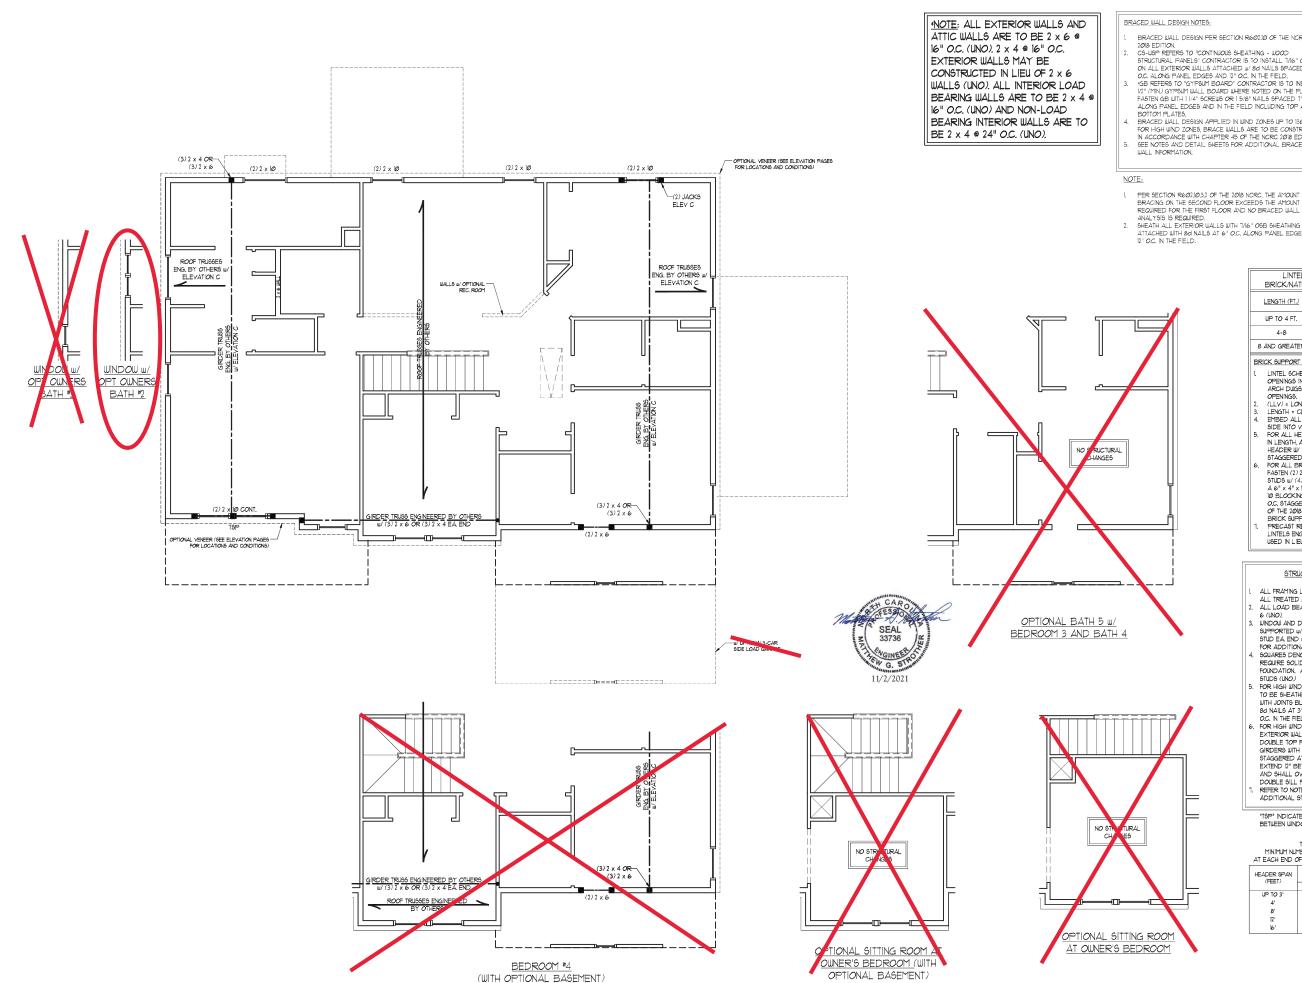

- BRACED WALL DESIGN PER SECTION R60210 OF THE NORC
- CS-LOP REPERS TO "CONTRACTOR IS TO INSTALL 17/6" OSB ON ALL EXTERIOR WALLS ATTACHED W 8d NAILS SPACED 6" OC. ALONG PANEL EDGES AND 2" OC. N. THE FIELD.

 GB REFERS TO "SYPSUM BOARD" CONTRACTOR IS TO INSTALL 1/2" ("INL) GYPSUM WALL BOARD WERE NOTED ON THE FLANS.
 FASTEN GB UTH 11/4" SCREIG OR 15/6" NAILS SPACED TO OC. ALONG PANEL EDGES AND IN THE FIELD INCLUDING TOP AND POOTTOM IS ATTACK.
- ALONG PANEL EDGES AND IN THE FIELD INCLUDING TOP AND BOTTOM PLATES.

 BRACED WALL DESIGN APPLIED IN WIND ZONES UP TO 130 MPH. FOR HIGH WIND ZONES, BRACE WALLS ARE TO BE CONSTRUCTED IN ACCORDANCE WITH CHAPTER 45 OF THE NORE 2018 EDITION.

 SEE NOTES AND DETAIL SHEETS FOR ADDITIONAL BRACED
- L PER SECTION R602,1032 OF THE 2010 NCRC, THE AMOUNT OF BRACING ON THE SECOND FLOOR EXCEEDS THE AMOUNT REQUIRED FOR THE FIRST FLOOR AND NO BRACED WALL
- ATTACHED WITH 8d NAILS AT 6" O.C. ALONG PANEL EDGES AND

LINTEL SCHEDULE FOR BRICKNATURAL STONE SUPPORT UP TO 4 FT. L 3 1/2 x 3 1/2 x 1/4 4-8 L 5 x 3 1/2 x 5/16 LLV 8 AND GREATER L 6 x 4 x 5/16 LLV

BRICK SUPPORT NOTES:

- LINTEL SCHEDULE APPLIES TO ALL LINIEL SCHEDULE APPLIES TO ALL
 OPENNAS IN DRICK VENEER (UND.) SEE
 ARCH DUIGS, FOR SIZE AND LOCATION OF
 OPENNAS.
 (ILLY) = LONG LEG VERTICAL
 LENGTH = CLEAR OPENNA
 EMBED ALL ANGLE IRONS MIN. 4° EACH
 SIDE INTO VENEER TO PROVIDE BEARING.

- FOR ALL HEADERS 8'-0" AND GREATER
 IN LENGTH, ATTACH STEEL ANGLE TO
 HEADER W/ 1/2" LAG SCREWS © 12" O.C. STAGGERED. FOR ALL BRICK SUPPORT @ ROOF LINES,
- FOR ALL BRICK SUPPORT © ROOF LINES, FASTEN (2) × 10 BLOCKING BETWEEN STUDS W/ (4) 12d NAILS PER PLY, FASTEN A 6 * x 4" x 5/16" 5 TEEL ANGLE TO (2) 2 x 0 BLOCKING W/ (2) 12" LAG SCREUS © 12" OC. \$14AGGERED. SEE SECTION R103.82.1 OF THE 2018 NORC FOR ADDITIONAL BRICK SUPPORT INFORMATION
- PRECAST REINFORCED CONCRETE
 LINTELS ENGINEERED BY OTHERS MAY BE
 USED IN LIEU OF STEEL LINTELS.

STRUCTURAL NOTES:

- ALL FRAMING LUMBER TO BE SPF 12 (UNO).
- ALL TREATED LUMBER TO BE \$179 % (UNO.) ALL LOAD BEARING HEADERS TO BE (2) 2 x 6 (UNO).
- WINDOW AND DOOR HEADERS TO BE SUPPORTED W/(I) JACK STUD AND (I) KING STUD EA, END (UNO.), SEE TABLE R602,15 FOR ADDITIONAL KING STUD REQUIREMENTS, SQUARES DENOTE POINT LOADS WHICH
- REQUIRE SOLID BLOCKING TO GIRDER OR FOUNDATION. ALL SQUARES TO BE (2) STUDS (UNO.)
- FOR HIGH WIND ZONES, ALL EXTERIOR WALLS TO BE SHEATHED WITH TIGE OSB SHEATHING WITH JOINTS BLOCKED AND SECURED WITH 8d NAILS AT 3" O.C. ALONG EDGES AND 6" O.C. IN THE FIELD,
- FOR HIGH WIND ZONES, SECURE ALL EXTERIOR WALL SHEATHING PANELS TO DOUBLE TOP PLATES, BANDS, JOISTS, AND GIRDERS WITH (2) ROUS OF 8d NAILS STAGGERED AT 3" OC. PANELS SHALL EXTEND 12" BEYOND CONSTRUCTION JOINTS AND SHALL OVERLAP GIRDERS AND DOUBLE SILL PLATES THEIR FULL DEPTH.
- ADDITIONAL STRUCTURAL INFORMATION.

"TSP" INDICATES TRIPLE STUD POCKET

TABLE R602.15 MINIMUM NUMBER OF FULL HEIGHT STUDS AT EACH END OF HEADERS IN EXTERIOR WALLS

HEADER SPAN (FEET)	MAXIMUM STUD SPACING (INCHES. (PER TABLE R602.3(5)					
	16	24				
UP TO 31	1	1				
4'	2	1				
8'	3	2				
12'	5	3				
16'	6	4				

DATE: NOVEMBER 2, 2021 CALE: 1/4" = 1'-0" DRAWN BY: H&H HOMES

SOUTHPORT H&H HOMES

ENGINEERING,


soe WADE AVE. SUTE BY AAK (919) 789NC. LICENSE NO.: C. 1733
NC. LICENSE NO.: C. 1733

 \rightarrow


NGINEERED BY: WFB

SHEET: 7 OF: 9 CEILING FRAMING



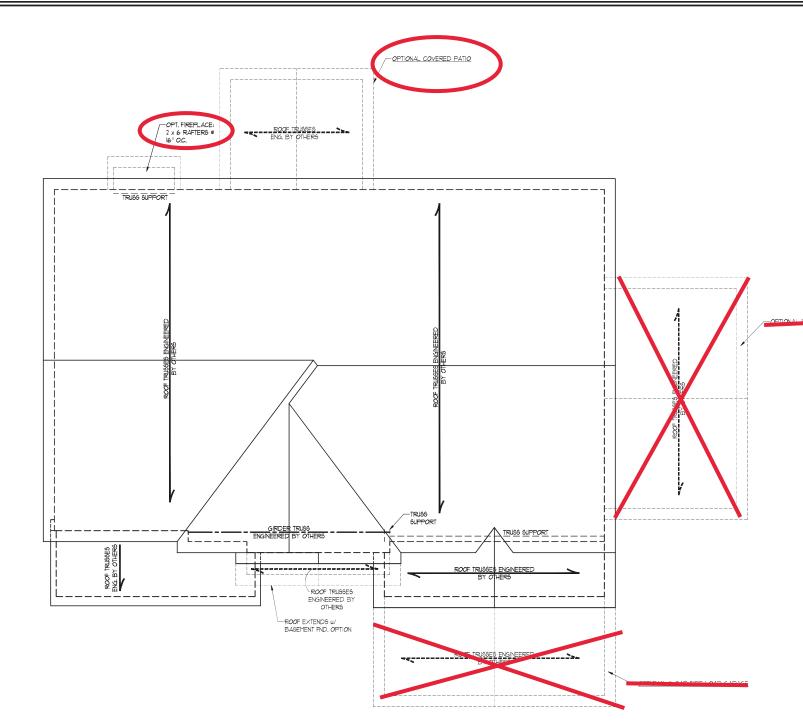

ELEVATIONS A & B



I.S. THOMPSON
ENGINEERING, INC
606 WADE AVE. SUTE 104 RALEIGH, NC 27605
PHONE, (919) 789-9921
N.C. LICENSE NO.: C.1733

BRICK SUPPORT NOTE:

- FASTEN (2) 2 × 10 BLOCKING BETWEEN WALL
 STUDS W (4) 12d NAILS FER PLY, FASTEN A
 6' x 4' x 5/16' STEEL ANGLE TO (2) 2 x 10
 BLOCKING W (2) 12' 12d SOCEBUS 6 12' 0.C.
 STAGERED. SEE SECTION R103321. OF
 THE 2018 NORF FOR ADDITIONAL BRICK
 SUPPORT INFORMATION.
 WHEER ROOF SLOPES EXCEED 1-12, NSTALL
 3" x 3" x 14" STEEL PLATE STOPS AT 24"
 O.C. PER SECTION R103221 OF THE NORTH
 CAROLINA RESIDENTIAL CODE, 2018
 EDITION.

STRUCTURAL NOTES:

- STRUCTURAL NOTES:

 STRUCTURAL NOTES:

 ALL FRAMING LUMBER TO BE *2

 FOR (NO).

 CIRCLES DENOTE (3) 2 x 4 POSTS
 FOR ROOF SUPPORT.

 FRAME DOR'TER WALLS ON TOP
 OF DOUBLE OR TRIPLE RAFTERS.

 HIP SPLICES ARE TO BE SPACED
 A MIN OF 8'-0", FASTEN
 MEMBERS WITH THREE ROUS OF
 IZO NAILS & 16" OC. (17"P)

 STICK FRAME OVER-FRAMED
 ROOF SECTIONS W 2 x 8 RIDGES,
 2 x 6 RAFTERS ® 16" OC. AND
 FLAT 2 x 0" VALLET'S OR USE
 VALLET YRISSES.

 FASTEN FLAT VALLET'S TO
 RAFTERS OR TRISSES WITH
 SIMPSON H25A BURRICANE
 TIES THROUGH NOTCH IN ROOF
 SHEATHING. EACH RAFTER IS TO
 BE FASTEND TO THE FLAT
 VALLET WITH A MIN. OF (6) 12d
 TOE NAILS.

 REFER TO SECTION RAPOLIT OF THE
 2018 NORCE FOR REQUISIO OF THE
 2018 NORCE FOR REQUISIO OF THE
 RESISTANCE AT RAFTERS AND
 TRISSES.

 REFER TO NOTES AND DETAIL
- RESISTANCE AT RAFTERS AND TRUSSES.
 REFER TO NOTES AND DETAIL SHEETS FOR ADDITIONAL STRUCTURAL INFORMATION.

SOUTHPORT H&H HOMES

DATE: NOVEMBER 2, 2021

SCALE: 1/4" = 1'-0" DRAWN BY: H&H HOMES


ENGINEERED BY: WFB


SHEET: 8 OF: 9


S-5a ROOF FRAMING PLAN




TYPICAL SLAB DETAIL

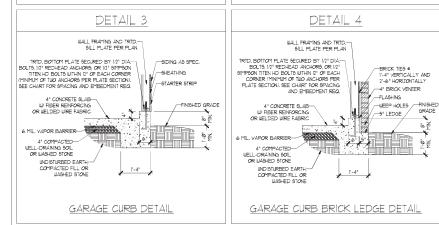

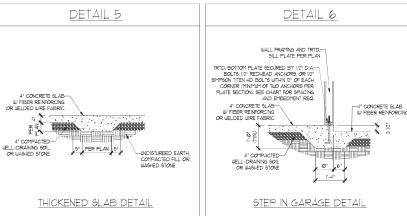



STEMWALL DETAILS

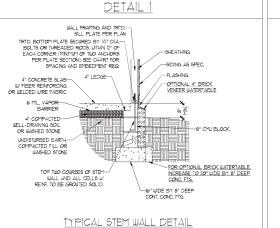

(W/ OPTIONAL WATERTABLE

WALL FRAMING AND TRTD.— SILL PLATE PER PLAN

4" LEDGE

SILL PLATE PER PLAN

FRID. BOTTOM PLATE SECURED BY 1/2" DIABOLTS OR THREADED RODS, WITHIN 12" OF
EACH CORRER (FININIUM OF TWO ANCHORS)
PER PLATE SECTION, SEE CHART FOR
SPACING AND EMBEDMENT REQ.


WALL AND ALL CELLS III.
REINF, TO BE GROUTED SOLID

W FIBER REINFORCING OR WELDED WIRE FABRIC

4" COMPACTED— WELL-DRAINING SOIL OR WASHED STONE

GRADE

BRICK VENEER DETAIL

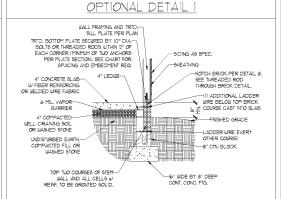

OPTIONAL STEM WALL DETAIL


SIDING AS SPEC

FNISHED GRADE

-8" CMU BLOCK

SHEATHING.

DETAIL 2 DETAIL 3




TYPICAL STEM WALL FND. DETAIL W/ CURB @ GARAGE

OPTIONAL DETAIL 3 2 x 6 WALL FRAMING AND TRTD.— SILL PLATE PER PLAN 2 × 6 MIN. TRTD. BOTTOM PLATE SECURED BY— 1/2" DIA BOLTS OR THREADED ROD WITHIN 12" OF EACH CORBER (MINIMUM OF TUO ANCHORS PER PLATE SECTION). SEE CHART FOR SPACING AND EMBEDMENT REQ. -SHEATHING NOTCH BRICK PER DETAIL 8, SEE THREADED ROD THROUGH BRICK DETAIL. 4" CONCRETE SLAB--(1) ADDITIONAL LADDER 6 MIL. VAPOR BARRIER -FNISHED GRADE 4" COMPACTED -WELL-DRAINING SOIL OR WASHED STONE LADDER WIRE EVERY OTHER COURSE UNDISTURBED EARTH, COMPACTED FILL OR WASHED STONE —e" cMJ BLOCK TOP THE COURSES OF STEM-WALL AND ALL CELLS W/ REINF, TO BE GROUTED SOLID.

OPTIONAL STEM WALL FND. DETAIL W/ CURB @ GARAGE

TYPICAL STEM WALL FND. W/ BRICK DETAIL

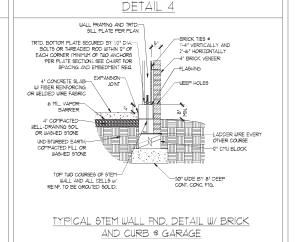

DETAIL 8 INSIDE EDGE OF 1/2" ANCHOR ROD MASONRY STEMWALL I ADDER WIRE BRICK MASONRY 000 000 000 OUTSIDE EDGE OF BRICK AND STICK FRAMED WALL ABOVE -ROD AND GROUT SOLID THREADED ROD THROUGH BRICK MASONRY

MASONRY STEMWALL SPECIFICATIONS MASONRY WALL TYPE WALL HEIGHT (FEET) 4" BRICK AND 4" 4" BRICK AND 8" 8" CMU 12" CMU 2 AND BELOW UNGROUTED GROUT SOLID UNGROUTED UNGROUTED UNGROUTED GROUT SOLID UNGROUTED UNGROUTED GROUT SOLID w/ *4 REBAR @ 48" O.C. GROUT SOLID w/ *4 REBAR @ 64" O.C. GROUT SOLID GROUT SOLID GROUT SOLID W/ *4 GROUT SOLID W/ *4 GROUT SOLID w/ #4 5 NOT APPLICABLE REBAR @ 36" O.C. NOT APPLICABLE GROUT SOLID W/ *4 GROUT SOLID W/ *4 REBAR @ 24* O.C. REBAR @ 64* O.C. GROUT SOLID w/ *4 REBAR @ 24" O.C. 6 1 AND GREATER ENGINEERED DESIGN BASED ON SITE CONDITIONS

STRUCTURAL NOTES:

- WALL HEIGHT MEASURED FROM TOP OF FOOTING TO TOP OF THE WALL.
 TIE MULTIPLE WITHES TOGETHER WITH LADDER WIRE AT 16" O.C. VERTICALLY.
 CHART APPLICABLE FOR HOUSE FOUNDATION ONLY, CONSULT ENGINEER FOR DESIGN OF GARAGE FOUNDATION NOT COMMON TO HOUSE.
- FOUNDATION NOT COMMON TO HOUSE.

 BACKFILL OF CLEAN 51 / 51 MASHED STONE 16 ALLOWABLE.

 BACKFILL OF WELL DRAINED OR SAND GRAVEL MIXTURE SOILS (45 PSP.FT BELOW GRADE)

 CLASSIFIED AS GROUP I ACCORDING TO INFIRED SOILS CLASSIFICATION SYSTEM IN ACCORDANCE

 WITH TABLE RADS OF THE 708 INTERNATIONAL RESIDENTIAL CODE ARE ALLOWABLE.

 PREP \$LAB PER RS0621 AND RS0622 BASE OF THE 2018 INTERNATIONAL RESIDENTIAL CODE.
- MINIMUM 24" LAP SPLICE LENGTH
- LOCATE REBAR IN CENTER GIF.

 LOCATE REBAR IN CENTER OF FOUNDATION WALL.

 WHERE REQUIRED, FILL BLOCK SOLID WITH TYPE "S" MORTAR OR 3000 PSI GROUT, USE OF "LOW LIFT GROUTING" METHOD REQUIRED WHEN FILLING WALLS WITH GROUT AT HEIGHTS OF 5" AND GREATER

ANCHOR SPACING AND EMBEDMENT				
WIND ZONE	12 <i>0</i> MPH	130 MPH		
5PACING:	6'-0" O.C.	4'-0" O.C.		
EMBEDMENT	7"	IS" INTO MASONRY T" INTO CONCRETE		

SPEED WIND MPH ULTIMATE DESIGN FOUNDATION DETAILS

ഗ

שַׁלַ טְּ

NEW PARTY NEW PA

世世

S. II. NGINE GGG WADE AVT PHONT

S CC

CALE: NTS GINEERED BY: JES

130]

120 MPH.


D-1 FOUNDATION DETAILS





- WALL BRACING DESIGNED IN ACCORDANCE WITH CHAPTER 6 OF THE 2018 NC RESIDENTIAL BUILDING CODE (NCRC). TABLES AND FIGURES REFERENCED ARE FROM THE 2018 NCRC. SEE THIS SHEET FOR GENERAL DETAILS. REFER TO THE 2018 NORG FOR ADDITIONAL INFORMATION AS NEEDED
- SEE STRUCTURAL SHEETS FOR BRACED WALL LOCATIONS, DIMENSIONS, HOLD DOUR TYPE AND LOCATIONS, BRACED WALL LINE KEY WITH WALL DESIGN SUMMARY OF REQUIRED/PROVIDED TOTALS FOR EACH WALL LINE AND ANY SPECIAL NOTES
- 4. ALL EXTERIOR WALLS ARE TO BE SHEATHED WITH CS-WSP IN ACCORDANCE WITH SECTION R602.10.3 UNLESS NOTED OTHERWISE.
- O HERWISE.


 ALL EXTERIOR AND INTERIOR WALLS TO HAVE 1/2" GYPSUM INSTALLED, WHEN NOT USING METHOD "GB", GYPSUM TO BE FASTENED PER TABLE RIGOLS, METHOD GB TO BE FASTENED PER TABLE REGOL/Ø]

 6. CS-WSP REFERS TO THE "CONTINUOUS SHEATHING. WOOD STRUCTURAL PANELS" WALL BRACING METHOD. TI/6" OSB SHEATHING IS TO BE NISTALLED ON ALL EXTERIOR WALLS ATTACHED W 6d COMMON NAILS OR 8d (2) 1/2" LONG X Ø]13" DIAMETER) NAILS SPACED 6" O.C. ALONG PANEL EDGES AND 12" O.C. IN THE FIELD (UN.O.).
- GB REFERS TO THE "GTPSM" BOARD" WALL BRACING METHOD. 12" (MIN) GYPSM" WALL BOARD IS TO BE INSTALLED ON BOTH SIDES OF THE BRACED WALL FASTENED WITH 114" SCREWS OR 15.0" NALLS SPACED T" OC. ALONG PARAL EDGES NICLUDING TOP AND BOTHOM PLATES AND INTERMEDIATE SUPPORTS (MIN). VERBY ALL FASTENED WITH STORY AND SOTOM PLATES AND INTERMEDIATE SUPPORTS (MIN). VERBY ALL FASTENED WITH STORY AND 5/8" GYPSM" FRIOR TO CONSTRUCTION. FOR INTERIOR FASTENER OPTIONS SEE TABLE RT0235. FOR EXTERIOR FASTENER OPTIONS SEE TABLE R6023(1). EXTERIOR GB TO BE INSTALLED VERTICALLY.
- REQUIRED BRACED WALL LENGTH FOR EACH SIDE OF THE CIRCUMSCRIBED RECTANGLE ARE INTERPOLATED PER TABLE R602, 103, METHOD CS-USP CONTRIBUTES ITS ACTUAL LENGTH, METHOD GB CONTRIBUTES 5 ITS ACTUAL LENGTH, AND METHOD PF CONTRIBUTES IS TIMES ITS ACTUAL LENGTH.

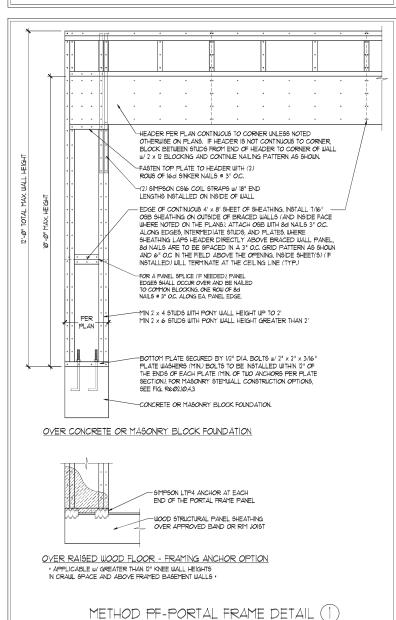


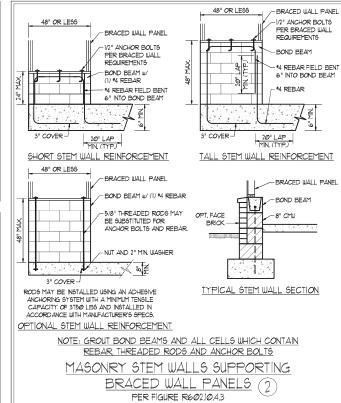

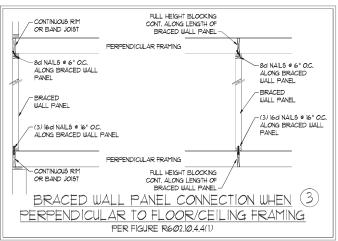


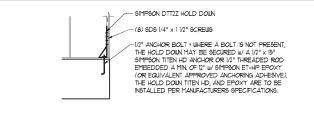



HOLD DOWN DETAIL FOR MASONRY FOUNDATION OR MONOLITHIC SLAB * APPLICABLE ONLY WHERE SPECIFIED ON PLAN

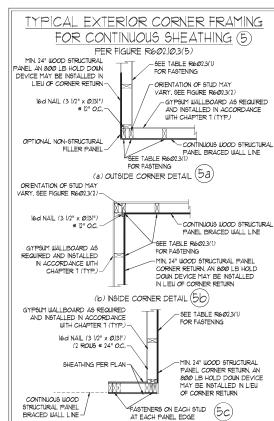


(c) GARAGE DOOR CORNER DETAIL (SEE PLAN FOR ADDITIONAL STRUCTURAL INFORMATION OR ALTERNATE CONFIGURATIONS)





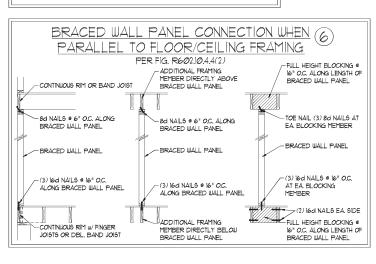



This sealed page is to be used in conjunction with a full plan set engineered by J.S. Thompson Engineering, Inc. only. Use of this individual sealed page within architectural pages or shop drawings by others is a punishable offense under N.C. Statute § 89C-23



a Z ഗ وَ الْمُ RIN RALE II W ٠ | أ ح ٠ ٥ ٠ S S JШ

> SPEED S DESIGN WIND S AND DETAILS MPH ULTIMATE I BRACING NOTES MPH - 130 N WALL E 120

DATE: NOVEMBER 14, 2018

CALE: 1/4" = 1'-0" DRAWN BY: IST

NGINEERED BY: IST

BRACED WALL NOTES AND DETAILS AND PF DETAIL

ഗ

GENERAL NOTES

- 1 ENGINEER'S SEAL APPLIES ONLY TO STRUCTURAL COMPONENTS INCLUDING ROOF RAFTERS HIPS VALLEYS RIDGES FLOORS WALLS BEAMS HEADERS, COLUMNS, CANTILEYERS, OFFSET LOAD BEARING WALLS, PIERS, GIRDER SYSTEM AND FOOTING. ENGINEER'S SEAL DOES NOT CERTIFY DIMENSIONAL ACCURACY OF ARCHITECTURAL LAYOUT INCLUDING ROOF, ENGINEER'S SEAL DOES NOT APPLY TO 1-JOIST OR FLOOR/ROOF TRUSS
- ALL CONSTRUCTION SHALL CONFORM TO THE LATEST REQUIREMENTS OF THE NORTH CAROLINA RESIDENTIAL CODE (NORC.), 2018 EDITION, PLUS
 ALL LOCAL CODES AND REGULATIONS. THE STRUCTURAL ENGINEER IS NOT RESPONSIBLE FOR, AND WILL NOT HAVE CONTROL OF, CONSTRUCTION MEANS METHODS TECHNIQUES SEQUENCES OR PROCEDURES OR SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE CONSTRUCTION WORK. NOR WILL THE ENGINEER BE RESPONSIBLE FOR THE CONTRACTORS FAILURE TO CARRY OUT THE CONSTRUCTION WORK IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.
- 3. STRUCTURAL DESIGN BASED ON THE PROVISIONS OF THE NCRC, 2018 EDITION (R3014 R3011)

DESIGN CRITERIA:	LIVE LOAD (PSF)	DEAD LOAD (PSF)	DEFLECTION (IN)
ATTIC WITH LIMITED STORAGE	20	10	L/240 (L/360 w/ BRITTLE FINISHES)
ATTIC WITHOUT STORAGE	10	10	L/36Ø
DECKS	40	10	L/360
EXTERIOR BALCONIES	40	10	L/36Ø
FIRE ESCAPES	40	10	L/36Ø
HANDRAILS/GUARDRAILS	200 LB OR 50 (PLF)	10	L/360
PASSENGER VEHICLE GARAGE	5Ø	10	L/360
ROOMS OTHER THAN SLEEPING ROOM	40	10	L/36Ø
SLEEPING ROOMS	3Ø	10	L/36Ø
STAIRS	40	10	L/360
WIND LOAD	(BASED ON TABLE R3Ø12(4) WIND ZONE AND EXPOSURE)		
GROUND SNOW LOAD: Pa	2Ø (PSF)		

- I-JOIST SYSTEMS DESIGNED WITH 12 PSF DEAD LOAD AND DEFLECTION (IN) OF L/480
- FLOOR TRUSS SYSTEMS DESIGNED WITH 15 PSF DEAD LOAD
- 4. FOR 115 AND 120 MPH WIND ZONES FOUNDATION ANCHORAGE IS TO COMPLY WITH SECTION R403.16 OF THE NCRC, 2018 EDITION, FOR 130 MPH, 140 MPH, AND 150 MPH WIND ZONES, FOUNDATION ANCHORAGE IS TO COMPLY WITH SECTION 4504 OF THE NCRC, 2018 EDITION.
- 5. ENERGY EFFICIENCY COMPLIANCE AND INSULATION VALUES OF THE BUILDING TO BE IN ACCORDANCE WITH CHAPTER II OF THE NCRC, 2018 EDITION.

FOOTING AND FOUNDATION NOTES

- 1. FOUNDATION DESIGN BASED ON A MINIMUM ALLOWABLE BEARNG CAPACITY OF 2000 PSF. CONTACT GEOTECHNICAL ENGINEER IF BEARNG CAPACITY IS NOT ACHIEVED.
- 2. FOR ALL CONCRETE SLABS AND FOOTINGS, THE AREA WITHIN THE PERIMETER OF THE BUILDING ENVELOPE SHALL HAVE ALL VEGETATION, TOP FOR ALL CORCNETE IS LABS AND FOOTINGS, THE AREA WITHIN THE PERITE ERY OF THE BUILDING ENVELOYE SHALL HAVE ALL YESTETATION OF THE SULPHIAN ENVELOYE SHALL HAVE ALL YESTETATION CONTROL THE FILL DEPTHS SHALL HAVE ALL YESTETATION CONTROL THE FILL DEPTHS SHALL NOT EXCEED 24" FOR CLEAN SAND OR GRAYEL. A 4" THICK BASED CONSISTING OF CLEAN GRADED SAND OR GRAYEL SHALL BE PLACED. A BASE COURSE FOR THE COURSE IS NOT REQUIRED WITHER A CONCRETE SLAB IS INSTALLED ON USELL-DRAINED OR SAND-GRAYEL WITHING SCHASPIED AS GROUP I, ACCORDING TO THE WITHER SOLD CLASSIFICATION SYSTEM IN ACCORDANCE WITH TABLE R4051 OF THE NORC, 2018 EDITION.
- 3. PROPERLY DEWATER EXCAVATION PRIOR TO POURING CONCRETE WHEN BOTTOM OF CONCRETE SLAB IS AT OR BELOW WATER TABLE. IF APPLICABLE, 3/4" - 1" DEEP CONTROL JOINTS ARE TO BE SAWED WITHIN 4 TO 12 HOURS OF CONCRETE FINISHING AND WALL LOCATIONS HAVE BEEN MARKED. ADJUST WHERE NECESSARY.
- 4. CONCRETE SHALL CONFORM TO SECTION R4022 OF THE NCRC, 2018 EDITION, CONCRETE REINFORCING STEEL TO BE ASTM A615 GRADE 60 WELDED WIRE FABRIC TO BE ASTM AIRS. MAINTAIN A MINIMUM CONCRETE COVER AROUND REINFORCING STEEL OF 3" IN FOOTINGS AND 1 1/2" IN SLABS, FOR POURED CONCRETE WALLS, CONCRETE COVER FOR REINFORCING STEEL MEASURED FROM THE INSIDE FACE OF THE WALL SHALL ONOT BE LESS THAN 3/4". CONCRETE COVER FOR REINFORCING STEEL MEASURED FROM THE OUTSIDE FACE OF THE WALL. SHALL NOT BE LESS THAN 11/2" FOR 15 BARS OR SMALLER, AND NOT LESS THAN 2" FOR 16 BARS OR LARGER.

This sealed page is to be used in conjunction with a full

architectural pages or shop drawings by others is a punishable offense under N.C. Statute § 89C-23

ered by J.S. Thompson Engineering, Inonly. Use of this individual sealed page within

- 5. MASONRY UNITS TO CONFORM TO ACE 530/ASCE 5/TMS 402. MORTAR SHALL COMFORM
- 6. THE UNSUPPORTED HEIGHT OF MASONRY PIERS SHALL NOT EXCEED FOUR TIMES THEIR LEAST DIMENSION FOR UNFILLED HOLLOW CONCRETE MASONRY UNITS AND TEN TIMES THEIR LEAST DIMENSION FOR SOLID OR SOLID FILLED PIERS. PERS MAY BE FILLED SOLID WITH CONCRETE OR TYPE M OR 5 MORTAR PIERS AND WALLS SHALL BE CAPPED WITH 8" OF SOLID MASONRY
- THE CENTER OF EACH OF THE PIERS SHALL BEAR IN THE MIDDLE THIRD OF ITS RESPECTIVE FOOTING, EACH GIRDER SHALL BEAR IN THE MIDDLE THIRD OF THE PIERS.
- 8. ALL CONCRETE AND MASONRY FOUNDATION WALLS ARE TO BE CONSTRUCTED IN ACCORDANCE WITH THE PROVISIONS OF SECTION RIPS OF INTENSIVE EDITION OR IN ACCORDANCE WITH ACI 318, ACI 332, NCM*I RISE-3 OR ACE 350/ASCE 5/1705 462. NASONRY FOUNDATION WALLS ARE TO BE REINFORCED FER TABLE RAPALINI), RAPALINI2), RAPALINI3), OR RAPALINI4) OF THE NCRC, 2018 EDITION. CONCRETE FOUNDATION WALLS ARE TO BE REINFORCED FER TABLE RAPALINIS) OF THE NCRC, 2018 EDITION. STEP CONCRETE FOUNDATION WALLS TO 2 x 6 FRAMED WALLS AT 16" O.C. WHERE GRADE PERMITS (UNO).

- LAMINATED VENEER LUMBER (LVL) SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES: Fo =2600 PSI, Fv = 285 PSI, E = 19000000 PSI. LAMINATED STRAND LUMBER (LSL) SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES; Fb = 2325 PSI, Fv = 310 PSI, E = 1550000 PSI,
- 3. STRUCTURAL STEEL SHALL CONFORM TO THE FOLLOWING ASTM SPECIFICATIONS

W AND WT SHAPES: CHANNELS AND ANGLES: ASTM A36 HOLLOW STRUCTURAL SECTIONS: ASTM A500 GRADE B ASTM A53, GRADE B, TYPE E OR S

4. STEEL BEAMS SHALL BE SUPPORTED AT EACH END WITH A MINIMUM BEARING LENGTH OF 3 1/2" AND FULL FLANGE WIDTH (UNO). PROVIDE SOLID BEARING FROM BEAM SUPPORT TO FOUNDATION. BEAMS SHALL BE ATTACHED AT THE BOTTOM FLANGE TO EACH SUPPORT AS FOLLOWS (UNO):

A. WOOD FRAMING (2) 1/2" DIA. x 4" LONG LAG SCREWS B. CONCRETE C. MASONRY (FULLY GROUTED) (2) 1/2" DIA. x 4" LONG SIMPSON TITEN HD ANCHORS

THE 2x NAILER 16 SECURED TO THE TOP OF THE STEEL BEAM w/ (2) ROUG OF SELF TAPPING SCREUG ® 16" O.C. OR (2) ROUG OF 1/2" DIAMETER BOLTS ® 16" O.C. IF 1/2" BOLTS ARE USED TO FASTEN THE NAILER, THE STEEL BEAM SHALL BE FABRICATED w/ (2) ROUG OF 9/6" DIAMETER

- $6. \quad \text{ALL LOAD BEARING HEADERS TO CONFORM TO TABLE R602.7(1) AND R602.7(2) OF THE NCRC, 2018 EDITION OR BE (2) 2 × 6 WITH (1) JACK } \\$ AND (1) KING STUD EACH END (UNO), WHICHEVER IS GREATER ALL HEADERS TO BE SECURED TO EACH JACK STUD WITH (4) 8d NAILS. ALL BEAMS TO BE SUPPORTED WITH (2) STUDS AT EACH BEARING POINT (UNO). INSTALL KING STUDS PER SECTION R602.1.5 OF THE NORTH
- JACKS OR STUDS NOTED. ALL BEAMS OR GIRDER TRUSSES PERPENDICULAR TO WALL AND SUPPORTED BY (3) STUDS OR LESS ARE TO HAVE I 1/2" MINIMUM BEARING (UNO). ALL BEAMS OR GIRDER TRUSSES PERPENDICULAR TO WALL AND SUPPORTED BY MORE THAN (3) STUDS OR OTHER NOTED COLUMN ARE TO BEAR FULLY ON SUPPORT COLUMN FOR ENTIRE WALL DEPTH (UNO). BEAM ENDS THAT BUTT INTO ONE ANOTHER ARE TO EACH BEAR EQUAL LENGTHS (UNO).
- OCATED AT 6" FROM EACH END (UNO)
- IØ. BRACED WALL PANELS SHALL BE CONSTRUCTED ACCORDING TO THE NORTH CAROLINA RESIDENTIAL CODE 2018 EDITION WALL BRACING CRITERIA, THE AMOUNT, LENGTH, AND LOCATION OF BRACING SHALL COMPLY WITH ALL APPLICABLE TABLES IN SECTION R602.10.
- PROVIDE DOUBLE JOIST UNDER ALL WALLS PARALLEL TO FLOOR JOISTS. PROVIDE SUPPORT UNDER ALL WALLS PARALLEL TO FLOOR TRUSSES OR 1-JOISTS PER MANUFACTURER'S SPECIFICATIONS. INSTALL BLOCKING BETWEEN JOISTS OR TRUSSES FOR POINT LOAD SUPPORT FOR ALL POINT LOADS ALONG OFFSET LOAD LINES.
- 12. FOR ALL HEADERS SUPPORTING BRICK VENEER THAT ARE LESS THAN 8'-0" IN LENGTH, REST A 6" x 4" x 5/6" STEEL ANGLE WITH 6" MINIMUM EMBEDMENT AT SIDES FOR BRICK SUPPORT (UN.O.). FOR ALL HEADERS 8'-Ø" AND GREATER IN LENGTH, BOLT A 6" x 4" x 5/16" STEEL ANGLE TO HEADER WITH 1/2" LAG SCREWS AT 12" O.C. STAGGERED FOR BRICK SUPPORT. FOR ALL BRICK SUPPORT AT ROOF LINES, BOLT A 6" x 4" x 5/16" STEEL ANGLE TO (2) 2 x 10 BLOCKING INSTALLED W/ (4) 12d NAILS EA, PLY BETWEEN WALL STUDS WITH (2) ROWS OF 1/2" LAG SCREWS AT
- 14. FOR TRUSSED ROOFS, FRAME DORMER WALLS ON TOP OF 2 x 4 LADDER FRAMING AT 24" O.C. BETWEEN ADJACENT ROOF TRUSSES, STICK FRAME OVER-FRAMED ROOF SECTIONS WITH 2 x 8 RIDGES, 2 x 6 RAFTERS AT 16" O.C. AND FLAT 2 x 10" VALLEYS (UNO).
- ALL 4 x 4 AND 6 x 6 POSTS TO BE INSTALLED WITH 100 LB CAPACITY UPLIFT CONNECTORS TOP AND BOTTOM (UNO.) POSTS MAY BE SECURED USING ONE SIMPSON H6 OR LTS12 UPLIFT CONNECTOR FASTENED TO THE BAND AT THE BOTTOM AND THE BEAM AT THE TOP OF STRAP IF DESIRED. FOR MASONRY OR CONCRETE FOUNDATION USE SIMPSON POST BASE.

FRAMING NOTES

ALL FRAMING LUMBER SHALL BE \$2 SPF MINIMUM (Fb = 815 PS) Fv = 315 PS) F = 16000000 PS)) UNLESS NOTED OTHERWISE (UNO) ALL TREATED LUMBER SHALL BE 1 2 SYP MINIMUM (Fb = 915 PSI, Fv =115 PSI, E = 1600000 PSI) UNLESS NOTED OTHERWISE (UNC

PARALLEL STRAND LUMBER (PSL.) UP TO 1" DEPTH SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES: Fo = 2500 FSI, E = 18000000 FSI, PARALLEL STRAND LUMBER (PSL.) MORE THAN 1" DEPTH SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES: Fo = 2900 FSI, E = 20000000 PSI. INSTALL ALL CONNECTIONS PER MANUFACTURER'S SPECIFICATIONS.

LATERAL SUPPORT IS CONSIDERED ADEQUATE PROVIDING THE JOISTS ARE TOE NAILED TO THE 2x NAILER ON TOP OF THE STEEL BEAM, AND

5. SQUARES DENOTE POINT LOADS WHICH REQUIRE SOLID BLOCKING TO GIRDER OR FOUNDATION, SHADED SQUARES DENOTE POINT LOADS

CAROLINA RESIDENTIAL CODE, 2018 EDITION. 1. ALL BEAMS, HEADERS, OR GIRDER TRUSSES PARALLEL TO WALL ARE TO BEAR FULLY ON (1) JACK OR (2) STUDS MINIMUM OR THE NUMBER OF

FLITCH BEAMS SHALL BE BOLTED TOGETHER USING 1/2" DIAMETER BOLTS (ASTM A3/01) WITH WASHERS PLACED AT THREADED END OF BOLT. BOLTS SHALL BE SPACED AT 24" CENTERS (MAXIMUM), AND STAGGERED AT TOP AND BOTTOM OF BEAM (2" EDGE DISTANCE), WITH (2) BOLTS

9. ALL I-JOIST OR TRUSS LAYOUTS ARE TO BE IN COMPLIANCE WITH THE OVERALL DESIGN SPECIFIED ON THE PLANS, ALL DEVIATIONS ARE TO BE BROUGHT TO THE ATTENTION OF THE ENGINEER OF RECORD PRIOR TO INSTALLATION.

- 12" O.C. STAGGERED AND IN ACCORDANCE WITH SECTION RT03.82.1 OF THE NCRC, 2018 EDITION.
- 13. FOR STICK FRAMED ROOFS: CIRCLES DENOTE (3) 2×4 POSTS FOR ROOF MEMBER SUPPORT. HIP SPLICES ARE TO BE SPACED A MINIMUM OF 8'-0". FASTEN MEMBERS WITH THREE ROWS OF 12d NAILS AT 16" O.C. FRAME DORMER WALLS ON TOP OF DOUBLE OR TRIPLE RAFTERS AS
- EACH POST. ONE 16" SECTION OF SIMPSON CS16 COIL STRAPPING WITH (8) 8d HDG NAILS AT EACH END MAY BE USED IN LIEU OF EACH TWIST

WIND · 130 MPH ULTIMATE DESIGN W STANDARD STRUCTURAL NOI MPH 120

DATE: NOVEMBER 14, 2018

CALE: 1/4" - 1'-0" DRAWN BY: IES NGINEERED BY: JST

S-0 STRUCTURAL NOTES

lw ' SPEED