

Harnett County Department of Public Health

Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Triple A Homes Inc PROPERTY LOCATION: SR 1412 Christian Light RD
 NEW REPAIR EXPANSION SUBDIVISION: PAINCA PLACE LOT # 63
 Type of Structure: Fix SFD Site Improvements required prior to Construction Authorization Issuance:
 Proposed Wastewater System Type: PPBS 50% REDUCTION
 Projected Daily Flow: 480 GPD
 Number of bedrooms: 4 Number of Occupants: 8 max
 Basement Yes No
 Pump Required: Yes No May be required based on final location and elevations of facilities
 Type of Water Supply: Community Public Well Distance from well _____ feet Permit valid for: Five years
 Permit conditions: _____ No expiration

Authorized State Agent: James E. Manhart REHS Date: 11-14-22 SEE ATTACHED SITE SKETCH
 The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Triple A Homes Inc PROPERTY LOCATION: SR 1412 Christian Light RD
 Facility Type: Fix SFD New Expansion Repair
 Basement? Yes No Basement Fixtures? Yes No
 Type of Wastewater System** 50% REDUCTION PPBS Horizontal (Initial) Wastewater Flow: 480 GPD
 (See note below, if applicable) 50% REDUCTION PPBS (Repair) Horizontal

Installation Requirements/Conditions

Septic Tank Size <u>1200</u> gallons	Number of trenches <u>5</u>	Exact length of each trench <u>54'</u> feet	Trench Spacing: _____ Feet on Center
Pump Tank Size _____ gallons	Trenches shall be installed on contour at a	Maximum Trench Depth of: <u>20-18</u> inches	Soil Cover: <u>6</u> inches
	(Trench bottoms shall be level to +/-1/4" in all directions)	(Maximum soil cover shall not exceed 36" above the trench bottom)	

Pump Requirements: _____ ft. TDH vs. _____ GPM _____ inches below pipe
 Aggregate Depth: _____ inches above pipe
 Conditions: Follow Consultants layout - NO Foundation Drains through system

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
 NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

**If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.
 Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH


Authorized State Agent: James E. Manhart REHS Date: 11-14-22
 Construction Authorization Expiration Date: 11-14-27

Application # SFD 2206-0071

Harnett County Department of Public Health Site Sketch

Property Location: 581412 Christian Light RD
Issued To: Triple A Homes Inc Subdivision PRINCE PLACE Lot # 63
Authorized State Agent: James E. Manhart III REHS Date: 11-14-22

* Follow Consultants layout * EXISTING NEW BUILT SFD
* NO FOUNDATION DRAINS RUN THROUGH SYSTEM

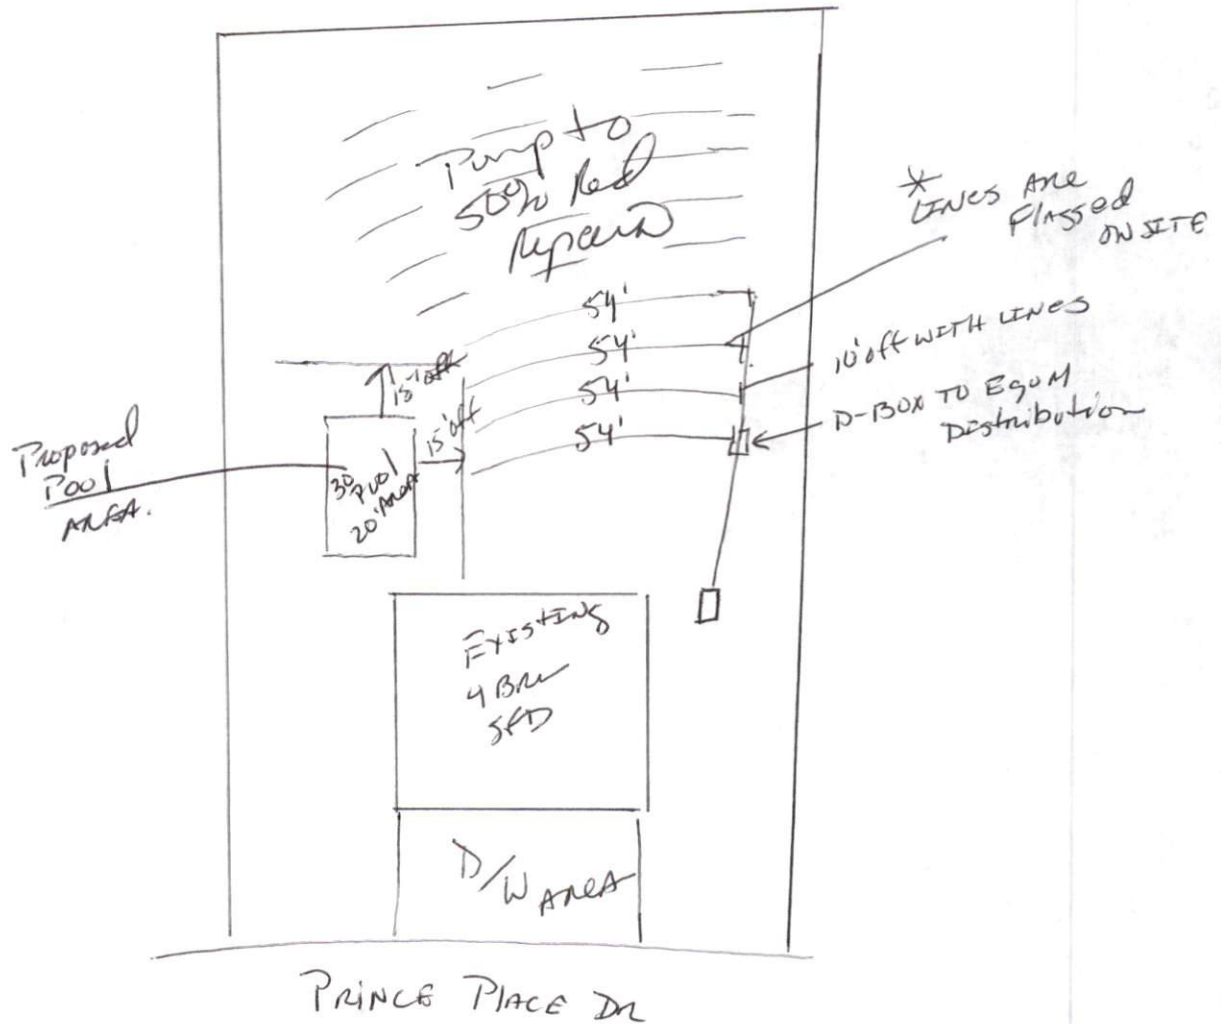

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.