

App# SPD 2206-0077

Harnett County Department of Public Health Improvement Permit

1000 Tim Warren RD
Revised Tank Location

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Sidney McLean PROPERTY LOCATION: SPD 2250 Tim Warren RD LOT # _____

NEW REPAIR EXPANSION SUBDIVISION _____

Type of Structure: 62'x67' SFD Site Improvements required prior to Construction Authorization Issuance: _____

Proposed Wastewater System Type: 25% reduction

Projected Daily Flow: 360 GPD

Number of bedrooms: 3 Number of Occupants: 6 max

Basement Yes No

Pump Required Yes No May be required based on final location and elevations of facilities

Type of Water Supply: Community Public Well Distance from well _____ feet

Permit valid for: Five years No expiration

Permit conditions: _____

Authorized State Agent: Moh H. REH Date: 10-5-22 SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules 1950, 1952, 1954, 1955, 1956, 1957, 1958 and 1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Sidney McLean PROPERTY LOCATION: SPD 2250 Tim Warren RD LOT # _____

Facility Type: 62'x67' SFD New Expansion Repair

Basement? Yes No Basement Fixtures? Yes No

Type of Wastewater System** _____ (Initial) Wastewater Flow: 360 GPD

(See note below, if applicable)

Installation Requirements/Conditions

Septic Tank Size: 1000 gallons

Pump Tank Size: _____ gallons

Number of trenches: 1 (Repair)

Exact length of each trench: 225 feet

Trenches shall be installed on contour at a Maximum Trench Depth of: 18-24 inches (Trench bottoms shall be level to +1-1/4" in all directions)

Trench Spacing: 9 Feet on Center

Soil Cover: 6 inches (Maximum soil cover shall not exceed 36" above the trench bottom)

Pump Requirements: _____ ft. TDH vs _____ GPM

Aggregate Depth: 6 inches below pipe, 2 inches above pipe, 17 inches total

Conditions: _____

WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.

**If applicable, I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: _____ Date: _____

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. This Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Law and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH


Authorized State Agent: Moh H. REH Date: 10-5-22

Construction Authorization Expiration Date: 10-5-27

Application # SP 2206-0077 R

Harnett County Department of Public Health Site Sketch

Property Location: SR 1750 Tim Currin Rd
Issued To: Selwyn McLean Subdivision _____ Lot # _____
Authorized State Agent: Moh R. R. H. Date: 10-5-22

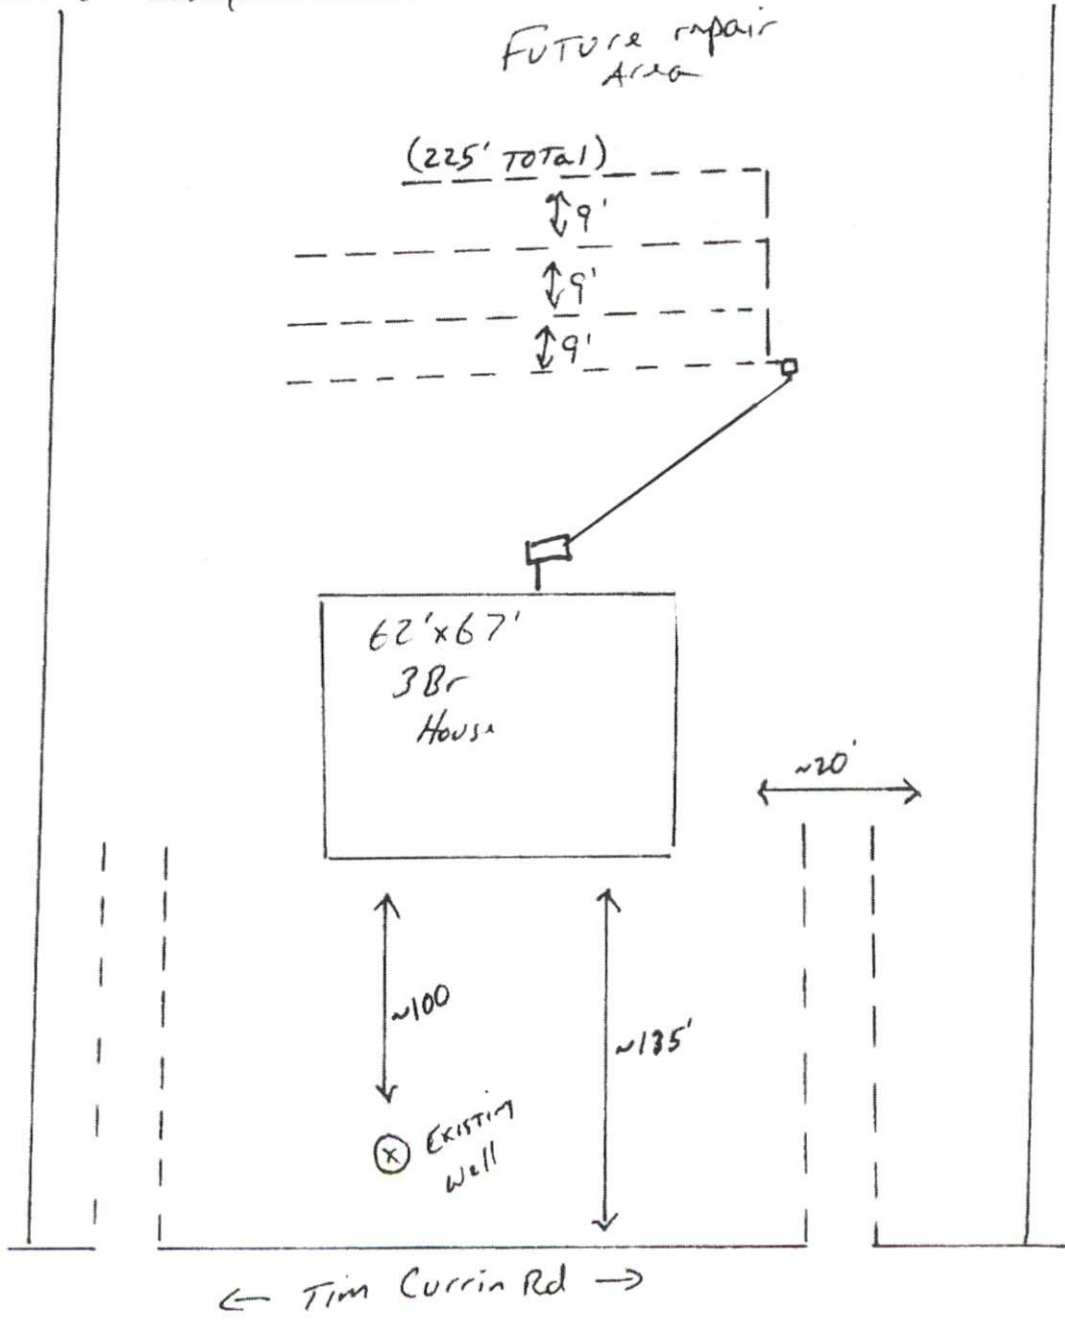

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.