## **PLANS FOR:**









HDBD

HORIZ

HTG

HVAC

INSUL

J-Box

JST

LAM

LT WT

LVI

LVR

MATL

MECH

MED

MEMB

MAX

LB

INV

CLG

CLO

CMU

CONC

CONT

CORR

CPB

CSMT

CT

CTR

CU FT

CWT

DIA

DIAG

DIM

DISP

DS

DTL

DWG

DWR

ELEV

EPB

**EMER** 

CU YD

CONST

CLG HT

Ceiling Height

Column

Concrete

Corridor

Carpet

Construction

Carpet Base

Ceramic Tile

Cubic Foot

Cubic Yard

Double Hung

Diameter

Diagonal

Dimension

Downspout

Detail

Drawing

Drawer

Each

Elevation

Emergency

Electric Panel Board

Ceramic Wall Tile

Garbage Disposal Double Joist

Concrete Masonry Unit

Continuous/ Continue

Hard Board

Hollow Metal

Heating/ Ventilation/

Air Conditioning

Insulate/ Insulation

Inside Diameter

Horizontal

High Point

Height

Heating

Include(d)

Junction Box

Interior

Invert

Joist

Kitchen

Length

Laminate

Lag Bolt

Light

Louver

Meter

Masonry

Material

Maximum

Medium

Membrane

Mechanical

Medicine Cabinet

Manufacture(er)(ing)

Left Hand

Light Weight

Laminated Veneer Lumber

Header

PT

PTN

PR

PSI

PVC

RA

RFFR

RFINE

REOD

RESIL

RET

RM

RO

ROW

RVS

SHT

SHT GI

SHWR

SIM

SPEC

SCHED

PRKG

Paint(ed)

Partition

Parking

Pavement

Return Air

Roof Drain

Reference

Reinforced

Required

Resilient

Return

Revision

Roofing

Reverse

Schedule

Storm Drain

Square Foot

Sheet Glass

Specification

Shower

Similar

Rough Opening

Right of Way

Rubber Base

Radius

Riser

Quarry Tile

Pair

Porcelain Tile

Pounds per Square Inch

Reinforced Concrete Pipe

Polyvinyl Chloride

## **MATTAMY HOMES - CLEARWATER LH**

		Α	<b>BBREVIA</b>	TION	LEGEND			PLAN	SET COMPOSITION	ELEVATION
AB ABV	Anchor Bolt Above	EQ E.W.	Equal Each Way	MIN MIR	Minimum Mirror	SQ SS	Square Solid Surface	PAGE#	LAYOUT	
AC ACC	Air Conditioner Access/ Accessible	EXIST EXP	Existing Exposed	MISC MM	Miscellaneous Millimeter	SS SST	Sanitary Sewer Stainless Steel	T1.0-T1.1	TITLE SHEET AND REVISION LOG	
ACFL ADJ	Access Floor Adjacent	EXT F.A.	Exterior Flat Archway	MO MOV	Masonry Opening Movable	ST STA	Steel Station	T1.2-T1.3	GENERAL NOTES	FRENCH
ADJ AFF	Adjustable Above Finished Floor	FD FDTN	Floor Drain Foundation	MTD MTFR	Mounted Metal Furring	STC STD	Sound Transmission Class Standard	0.10-0.15	ELEVATIONS	IIVEITOII
AGGF ALT	Aggregate Alternate	FF FG	Finish Floor Fixed Glass	MTL MULL	Metal Mullion	STOR STRUCT	Storage Structural	0.20-0.21	BASEMENT FLOOR PLANS	OOLINITON
ALUM	Aluminum Anchor/Anchorage	FIN FLEX	Finish Flexible	NIC NOM	Not In Contract Nominal	SYS	System Tread	1.0-1.4	1ST FLOOR PLANS	COUNTRY
AP APPR	Access Panel	FLR F.O.	Floor Framed Opening	NR NRC	Noise Reduction  Noise Reduction Coefficier	T.A.	Trimmed Archway Towel Bar	2.0-2.2	2ND FLOOR PLANS	
ARCH	Architect(ural)	FOC FOF	Face of Concrete Face of Finish	NTS	Not to Scale	TEL	Telephone	3.0-3.1	3RD FLOOR PLANS	
AUTO BD	Automatic Board	FOM	Face of Masonry	OA OC	Overall On Center	TEMP T&G	Temporary/ Temperature Tongue and Groove	4.0-4.1	SECTIONS / DETAILS	CODE
BLDG BLK	Building Block(ing)	FOS FPL	Face of Studs Fireplace	OD OH	Outside Diameter Overhead (Overhang)	THK THRES	Thick(ness) Threshold	5.0-8.0	ELECTRICAL / HVAC PLANS	CODE
BOC BRG	Bottom of Curb Bearing	FR FTG	Frame Footing	OPNG PED	Opening Pedestal	TJ TMPD	Triple Joist Tempered			
BRG F BSMT	Basement	FUR GA	Furring/ Furred Gauge	PL PL	Plate Property Line	TOC TOL	Top of Curb/ Concrete Tolerance			2018 NORTH CAROLINA STATE BUILDING CODE:
BUR C.A.	Built up Roof Curved Archway	GALV GD	Galvanized Grade/ Grading	PLAM PLAS	Plastic Laminate Plastic	TOS TOST	Top of Slab Top of Steel			RESIDENTIAL CODE
CAB CB	Cabinet Catch Basin	GL G.T.	Glass/ Glazing Girder Truss	PLAS PL GL	Plaster Plate Glass	TOW TPD	Top of Wall Toilet Paper Dispenser			
CER CIR CJ	Ceramic Circle Control Joint	GYP HB HC	Gypsum Hose Bib Hollow Core	PLYWD PNL P.T.	Plywood Panel Pressure Treated Lumber	TV TYP UFIN	Television Typical Unfinish(ed)			

Unless Noted Otherwise

Vinyl Composition Tile

Urinal

Vertical

Vestibule

Vinvl Flooring

Vinyl Wall Covering

V(ee) Joint

Wood Base

Wired Glass

Water Heater

Working Point

Wainscot

Wall Tile

Center Line

Plus or Minus

Property Line

Channel

Plate

Weight Welded Wire Fabric

Wood

Window

Vinyl Base

UNO

UR

VB

VER

VERT

VEST

WB

WD

WDW

WGL

WPT

WSC

WT

SQUARE FOOTAGES				
	Elevation "FC"			
MAIN FLOOR LIVING	2339			
TOTAL LIVING	2339			
GARAGE	458			
PORCH	116			
PLAN OPTIONS				
PPO - UPPER FLOOR	+627			
PPO - COVERED VERANDA	+120			
PPO - SCREEN VERANDA	+120			
PPO - MORNING ROOM	+120			



MATTAMY HOMES
CHARLOTTE DIVISION
PH: 704-375-9373

MATTAMY HOMES RALEIGH DIVISION PH: 919-752-4898

S CONSTITUTE OPERIOR - ENERGY
8600 D'JERSEY CT. RALEIGH, NC 27617 919 480.1075
1SULTING JEEF FOR CHANGES MADE TO PLANS DUE IT
0S OR ANY CHANGES TO PLANS ADE IN HEH FIELL
Y OTHERS. DRAWINGS ARE PROVIDED TO CLIENT FOIL

JDS CORSULING FLLC; 8600 T) JERSEN INFO@JDSCONSULTING NET; JDS CORSULING PLLC IS NOT LIABLE FC CONSTRUCTION METHODS OR ANY CF BY COTHERS. DR. THE ICIT NI MAREP PROPRETY OR A S. THE ICIT NI MAREP PROPRETY OR A S. A.

INA

CATION: NORTH CAROLINA

CAR

T NO.: **22900571** 

CLEARWATER

DATE: **03/18/2022** 

TITLE SHEET

 $\overline{\mathbf{T1.0}}$ 

	PLAN REVISION LOG				
DATE	REVISION DESCRIPTION	SHEETS	DFTR		
2/25/2022	SET UP MODEL FROM CLIENT CAD	ALL	CAR		



MATTAMY HOMES
CHARLOTTE DIVISION
PH: 704-375-9373

MATTAMY HOMES RALEIGH DIVISION PH: 919-752-4898

DS CONSULPING

ENGINEERING - DESIGN - ENERGY

BPLC: 860 'D' JERSEY CT. RALEIGH, NC 27617 919480 1075

CLEARWATER - LH

CATION:
NORTH CAROLINA

T NO.: **22900571** 

229005/

MATTAMY HOMES

DATE: DRAWN BY: CAR

**REVISION LOG** 

**T1.**1

**ROOF CONSTRUCTION** 

ROOF SHINGLES OVER #15 FELT PAPER (DOUBLE LAYER UNDERLAYMENT FOR ROOFS WITH A PITCH OF LESS THAN 4:12), 7/16" OSB SHEATHING WITH "H" CLIPS ON APPROVED ROOF TRUSSES. (SEE ROOF TRUSS DESIGNS). PREFIN. ALUM. EAVESTROUGH, FASCIA, & VENTED SOFFIT U.N.O.

(refer TO SHEET GN1.1 FOR N.C. ENERGY REQUIREMENTS.)

#### ROOF VENTILATION

OPTION 1: MIN. VENTILATION AREA OF 1:300 OF TOTAL ATTIC AREA WITH MIN. 50% & MAX. 80% OF REQUIRED CROSS VENTILATION PROVIDED VENTILATORS LOCATED IN THE UPPER PORTION OF THE SPACE ARE MIN. 36" ABOVE EAVE OR CORNICE VENTS WITH THE BALANCE OF THE REQUIRED VENTILATION PROVIDED BY EAVE OR CORNICE VENTS

OPTION 2: MIN. VENTILATION AREA OF 1:300 OF TOTAL ATTIC AREA WITH REDUCTION IN CROSS VENTILATION WITH USE OF VAPOR BARRIER LOCATED BETWEEN INSULATION & DRYWALL.

## 2. FRAME WALL CONSTRUCTION (2"x4") - SIDING

SIDING AS PER ELEVATION, APPROVED HOUSE WRAP, 7/16" OSB EXTERIOR SHEATHING, 2"x4" STUDS @ 16" O.C. T0 10' MAX HEIGHT. R13 BATT INSULATION, 1/2" INT. DRYWALL FINISH. (refer TO SHEET GN1.1 FOR N.C. ENERGY REQUIREMENTS.)

#### FRAME WALL CONSTRUCTION (2"x4") - STONE

SYNTHETIC STONE, SCRATCH COAT PER MANUFACTURERS SPECS. OVER GALV. MTL. LATH & APPROVED WEATHER RESISTANT BARRIER, 7/16" OSB EXTERIOR SHEATHING, 2"x4" STUDS @ 16" O.C. TO 10' MAX. HEIGHT, 1/2" INT, DRYWALL FINISH,

(refer TO SHEET GN1.1 FOR N.C. ENERGY REQUIREMENTS.)

SITE SHALL GRADE TO PROVIDE DRAINAGE UNDER ALL PORTIONS OF STRUCTURE & TO DRAIN SURFACE WATER AWAY FROM THE STRUCTURE. GRADE SHALL FALL 6" WITHIN FIRST 10'. ALL PLUMBING WORK SHALL COMPLY WITH THE CURRENT RESIDENTIAL & PLUMBING

#### **GROUND FLOOR SLAB ON GRADE**

CONCRETE SLAB PER STRUCTURAL DRAWINGS OVER CLEAN TERMITE TREATED COMPACT FILL. CHEMICAL PRE-TREATMENT OF SOIL IS REQUIRED BEFORE CASTING OF SLAB. SAW CUT EVERY ±200 S.F.

#### **EXPOSED FLOOR TO EXTERIOR**

PROVIDE MIN. R19 BATT INSULATION IN FLOORS BETWEEN CONDITIONED & UNCONDITIONED SPACES, APPROVED HOUSE WRAP, FINISHED SOFFIT

7. ATTIC INSULATION: refer TO SHEET GN1.1. FOR N.C. REQUIREMENT. 1/2" INT. DRYWALL CEILING FINISH OR APPROVED EQUAL

#### **INTERIOR STAIRS: SITE BUILT**

- 1. STRINGERS SHALL BE 2"x12" SYP.#2 (PRESSURE TREATED AT BASE) EQUALLY SPACED & ANCHORED TO 2"x8" HEADER & P.T.
- TREADS SHALL BE 2"x12" SYP.#2 RIPPED DOWN AS REQUIRED. (GLUED & NAILED)
- RISERS SHALL BE 1"x8" SYP.#2 RIPPED DOWN AS REQUIRED. (GLUED & NAILED)

4.	MIN. TREAD	= 9"
	MAX. NOSING	= 1-1/4"
	MIN. TREAD & NOSING	= 9-3/4"
	MAX. RISER	= 8-1/4"
	MIN. HEADROOM	= 6'-8"
	MAX. VERTICAL RISE FOR FLIGHT OF STAIRS	= 12'-0"
	MIN. STAIR WIDTH	= 3'-0"
	MIN CLEAR STAIR WIDTH	= 31.5"

#### **FOR WINDER STAIRS**

MIN. WINDER TREAD MEASURED 12" FROM INSIDE EDGE MIN. WINDER TREAD MEASURED AT ANY POINT = 4" MAX. WINDER DEPTH = 12"

HAND RAIL

MIN. STAIR / RAMP HANDRAIL HEIGHT = 34" MAX. STAIR / RAMP HANDRAIL HEIGHT = 38" MIN. INTERIOR GUARD HEIGHT = 36" MIN. EXTERIOR GUARD HEIGHT

FINISHED RAILING AND GUARD RAIL PICKETS SHALL BE SPACED 4" O.C. MAXIMUM BETWEEN PICKETS. GUARDS AND RAILINGS SHALL NOT HAVE OPENINGS FROM THE WALKING SURFACE TO THE REQUIRED **GUARD HEIGHT WHICH ALLOW THE PASSAGE OF A SPHERE 4" IN** DIAMETER.

#### (10) WALLS BACKING ONTO ATTIC

WALLS WHICH SEPARATE CONDITIONED LIVING SPACE FROM UNCONDITIONED ATTIC SPACE SHALL BE INSULATED AND SEALED WITH AN AIR BARRIER SYSTEM TO LIMIT INFILTRATION. IE. VAULTED CEILING, SKYLIGHT, RAISED COFFERED CEILING. (refer TO SHEET GN1.1 FOR N.C. ENERGY REQUIREMENTS.)

BEAM POCKET OR 8"x8" CONCRETE BLOCK NIB WALLS. MINIMUM

#### WALL & CEILING BETWEEN GARAGE & LIVING SPACE

5/8" TYPE 'X' DRYWALL ON CEILING OF GARAGE W/ LIVING SPACE ABOVE & 1/2" DRYWALL ON WALLS SUPPORTING 5/8" TYPE 'X' GWB W/ HABITABLE SPACE ABOVE AND BETWEEN HOUSE AND GARAGE. INSULATE WALLS AND CEILING BETWEEN GARAGE AND CONDITIONED SPACE. TAPE, SEAL & STRUCTURALLY SUPPORT ALL JOINTS, IN ORDER TO BE GAS/FUME TIGHT. (refer TO SHEET GN1.1 FOR N.C. ENERGY REQUIREMENTS.)

DOOR AND FRAME GASPROOFED. DOOR EQUIPPED WITH SELF **CLOSING DEVICE AND WEATHERSTRIPPING.** 

#### **CLOTHES DRYER VENT 14**

DRYER EXHAUST VENTED TO EXTERIOR & EQUIPPED W/ BACK DRAFT DAMPER. MAX. 35' DUCT LENGTH FROM THE CONNECTION TO THE TRANSITION DUCT FROM THE DRYER TO THE OUTLET TERMINAL. WHERE FITTINGS ARE USED REFER TO MECHANICAL CODE FOR MAX. LENGTH REDUCTIONS. SEAL WITH NON-COMBUSTIBLE MATERIAL, APPROVED FIRE CAULKING OR NON COMBUSTIBLE DRYER EXHAUST **DUCT WALL RECEPTACLE** 

## ATTIC ACCESS

ATTIC ACCESS HATCH 20"x30" WITH WEATHER- STRIPPING INTO ANY ATTIC EXCEEDING 30 SF x 30" VERT. HEIGHT. ALLOW 30" HEADROOM IN ATTIC AT HATCH LOCATION. r-10 MIN INSULATION

PULL DOWN STAIR (PDS) (SIZE PER PLAN) WITH WEATHER-STRIPPING & INSULATED WITH (R5) RIGID INSULATION. (NON-RIGID INSULATION MATERIALS ARE NOT ALLOWED)

#### FIREPLACE CHIMNEYS

TOP OF FIREPLACE CHIMNEY SHALL BE MIN. 3'-0" ABOVE THE HIGHEST POINT AT WHICH IT COMES IN CONTACT WITH THE ROOF AND 2'-0" ABOVE THE ROOF SURFACE WITHIN A HORIZ. DISTANCE OF 10'-0" FROM

LINEN CLOSET OR PANTRY W/ MIN. 12" DEEP SHELVES. PROVIDE MAX. OF 4 SHELVES.

#### MECHANICAL VENTILATION

MECHANICAL EXHAUST FAN, VENTED DIRECTLY TO EXTERIOR, TO PROVIDE 50cfm INTERMITTENT OR 20cfm CONTINUOUS IN BATHROOMS & TOILET ROOMS. PROVIDE DUCT SCREEN. SEE HVAC DESIGNS

#### (19) CABINET BLOCKING

36" A.F.F. FOR BASE CABINETS 54" A.F.F. FOR BOTTOM OF UPPER CABINETS 84" A.F.F. FOR TOP OF A 30" UPPER CABINET

## 96" A.F.F. FOR TOP OF OPTIONAL 42" UPPERS

(20) STUD WALL REINF. FOR HANDICAP BATHROOM
WHERE HANDICAPPED ACCESSIBILITY IS REQUIRED, PROVIDE WOOD BLOCKING REINFORCEMENT TO STUD WALLS FOR GRAB BAR INSTALLATION IN BATHROOM, 33"-36" A.F.F. BEHIND TOILET. 33" A.F.F. ON THE WALL OPPOSITE THE THE ENTRANCE TO THE BATHTUB OR

#### RANGE HOOD VENT

RANGE HOOD VENTED TO EXTERIOR. & EQUIPPED W/ BACK DRAFT DAMPER. MICROWAVES LOCATED ABOVE A COOKING APPLIANCE SHALL CONFORM TO UL923.

CONCRETE SLAB PER STRUCTURAL DRAWINGS OVER CLEAN TERMITE TREATED COMPACT FILL. SUBTERRANEAN TERMITE POST-TREATMENT MAY BE BORACARE APPLIED TO GROUND FLOOR WOOD SURFACES; ILO SOIL TREATMENT.

- OF MECHANICAL DRAFT AND DIRECT VENT VENTING SYSTEM" FOR MINIMUM CLEARANCES TO WINDOW & DOOR OPENINGS, GRADE, EXHAUST & INTAKE VENTS. REFER TO GAS UTILIZATION CODE.
- DIRECT VENT GAS FIREPLACE. SEE APPENDIX-C "EXIT TERMINALS OF MECHANICAL DRAFT AND DIRECT VENT VENTING SYSTEM" FOR MINIMUM CLEARANCES TO WINDOW & DOOR OPENINGS, GRADE, **EXHAUST & INTAKE VENTS. REFER TO GAS UTILIZATION CODE.**

## SUBFLOOR & FLOOR TRUSSES 3/4" T & G SUBFLOOR ON PRE-ENGINEERED FLOOR TRUSSES BY

REGISTERED TRUSS MANUFACTURER. (SEE STRUCT. ENGINEER'S **NAILING SCHEDULE)** PROVIDE DRAFT STOPPING EVERY 1000 SF BRACING IN ACCORDANCE W/ TPI/WTCA BCSI.

(1/4") PANEL TYPE UNDERLAY UNDER RESILIENT & PARQUET

EXPOSED BUILDING FACE
WALLS LESS THAN 5'-0" FROM PROPERTY LINE SHALL HAVE A FIRE RATING OF NO LESS THAN 1 HOUR IN ACCORDANCE WITH ASTM E 119 OR UL 263 WITH EXPOSURE FROM BOTH SIDES PROJECTIONS BETWEEN 2'-0" & 5'-0" FROM PROPERTY LINE MUST HAVE A RATING ON THE UNDERSIDE OF NO LESS THAN 1 HOUR IN ACCORDANCE WITH ASTM E 119 OR UL 263 PROJECTIONS LESS THAN 5'-0" FROM PROPERTY LINE CANNOT HAVE A

VENTILATED SOFFIT OPENINGS IN A WALL LESS THAN 3'-0" FROM PROPERTY LINE ARE NOT ALLOWED

OPENINGS IN A WALL BETWEEN 3'-0" & 5'-0" FROM THE PROPERTY LINE **CANNOT EXCEED 25% OF THE MAXIMUM WALL AREA** PENETRATIONS LESS THAN 5'-0" FROM THE PROPERTY LINE MUST COMPLY WITH CURRENT NC CODE

WHERE BUILDING FACE IS WITHIN 10'-0" OF PROPERTY LINE, ADD 5/8" GYPSUM BOARD UNDERLAYMENT @ SOFFIT

#### **STEMWALL FOUNDATION & FOOTING**

WHERE GROUND FLOOR SLAB EXTENDS TOO FAR ABOVE FIN. GRADE FOR A MONOLITHIC SLAB, CONSTRUCT STEMWALL DETAIL PER STRUCTURAL ENGINEER'S SPECIFICATIONS.

(28) TWO STORY VOLUME SPACES
BALLOON FRAMING PER STRUCTURAL ENGINEER - REFER TO FLOOR

TYP. 1 HOUR RATED PARTYWALL. REFER TO DETAILS FOR TYPE AND SPECS SPECS.

#### **WOOD FRAME & CONCRETE BLOCK CONSTRUCTION NOTES:**

1. TERMITE & DECAY PROTECTION

#### **CHEMICAL SOIL TREATMENT**

THE CONCETRATION RATE OF APPLICATION AND TREATMENT METHOD OF THE TERMITICIDE SHALL BE CONSISTENT WITH AND NEVER LESS THAN THE TERMITICIDE LABEL AND SHALL BE APPLIED ACCODING TO THE STANDARDS OF THE NORTH CAROLINA DEPARTMENT OF AGRICULTURE

FIELD CUTS, NOTCHES AND DRILLED HOLES SHALL BE TREATED IN THE FIELD IN ACCORDANCE WITH AWPA M4.

ALL WOOD IN DIRECT CONTACT WITH CONCRETE OR MASONRY FOUNDATION WALLS SHALL EITHER BE PRESSURE TREATED WOOD IN ACCORDANCE WITH AWPA U1 STANDARDS OR PROTECTED FROM CONTACT BY AN APPROVED IMPERVIOUS

2. SEE STRUCTURAL ENGINEER'S DRAWINGS FOR STEEL LINTELS SUPPORTING ANY BRICK VENEER

#### WINDOWS:

MIN. EMERGENCY ESCAPE WINDOW OPENING SIZES MIN. OF ONE EMERGENCY ESCAPE WINDOW REQ. IN EVERY

MIN. AREA FOR GROUND FLOOR EMERGENCY ESCAPE OPENING = 5.0 Sq.Ft MIN. AREA FOR SECOND FLOOR EMERGENCY ESCAPE OPENING =

5.7 Sa.Ft. MIN. HEIGHT DIMENSION FOR EMERGENCY ESCAPE OPENING = 22" MIN. WIDTH DIMENSION FOR EMERGENCY ESCAPE OPENING = 20" MAX. SILL HEIGHT FOR EMERGENCY ESCAPE OPENING = 44" ABOVE FLOOR

2. MINIMUM WINDOW SILL HEIGHT IN DWELLING UNITS WHERE THE OPENING OF AN OPERABLE

WINDOW IS MORE THAN 72" ABOVE FINISHED GRADE, OR SURFACE BELOW, THE LOWEST PART OF THE CLEAR OPENING SHALL BE A MINIMUM OF 24" ABOVE THE FINISHED FLOOR. ANY WINDOW 24" OR LESS FROM FINISHED FLOOR SHALL BE EQUIPPED WITH AN OPENING LIMITING DEVICE.

- 3. FIXED GLASS REQUIREMENTS: FIXED GLASS IS REQ. FOR WINDOWS LESS THAN 24" ABOVE FINISHED FLOOR.
- FLASHING, SEALANTS AND WEATHERSTRIPPING: INSTALL APPROVED CORROSION-RESISTANT FLASHING AT ALL EXTERIOR DOORS & WINDOWS TO EXTEND TO THE SURFACE OF THE EXTERIOR WALL FINISH OR WATER RESISTIVE BARRIER. WINDOWS SHALL BE SEALED WITH MINIMUM QUALITY OF CAULKING TO BE ASTM Spec 920 OR 1281 WITH TESTING & PERFORMANCE Class 25 OR AAMA Class 800 OR 812. RECOMMEND
- MAXIMUM TOLERANCE FOR MASONRY ROUGH OPENING SIZE: MASONRY ROUGH OPENING DIMENSIONS SHALL PROVIDE FOR A WINDOW PERIMETER SEALANT JOINT A MAXIMUM OF 1/4" IN
- MINIMUM ENERGY CODE REQUIREMENTS FOR WINDOWS **INSTALLED WINDOWS SHALL HAVE PROPERTIES AS EFFICIENT AS** WINDOWS USED TO CALCULATE FORM 1100A. WINDOW PERFORMANCE CRITERIA ARE CONTAINED IN THE ENERGY GAUGE USA/FLA/RES COMPUTER PROGRAM. refer TO SHEET GN1.1 FOR MINIMUM N.C. SOLAR HEAT GAIN COFFFICIENT (SHGC). WINDOWS WITH CERTIFIED PERFORMANCE SHALL HAVE THE NFRC

LABEL PROVIDING U-VALUE & SHGC TO REMAIN ON THE WINDOW

ANY GLASS OR WINDOW MUST BE TEMPERED THAT IS: LESS THAN 18" ABOVE FINISH FLOOR. WITHIN 60" OF A TUB OR SHOWER. WHERE NEAREST VERTICAL EDGE IS WITHIN 24" OF A DOOR AND BOTTOM WINDOW EDGE IS LESS THAN 60" ABOVE FLOOR. OVER 9 s.f. OF GLASS AREA. LESS THAN 60" FROM STAIR TREAD OR LANDING

- THE FOLLOWING, WHERE PRESENT, SHALL BE CAULKED, GASKETED, WEATHER-STRIPPED OR OTHERWISE SEALED WITH AN AIR BARRIÉR MATERIAL:
  - A. BLOCKING AND SEALING FLOOR / CEILING SYSTEMS AND UNDER KNEE WALLS OPEN TO UNCONDITIONED OR EXTERIOR SPACE
  - CAPPING AND SEALING SHAFTS OR CHASES INCLUDING
  - CAPPING AND SEALING SOFFIT OR DROPPED CEILING AREAS
  - D. TOP AND BOTTOM PLATES

UNTIL FINAL ENERGY INSPECTION.

- PENETRATIONS WILL BE SEALED WITH A PRODUCT THAT MEETS ASTM E119. FIBERGLASS INSULATION IS NOT PERMITTED TO SEAL ANY PENETRATIONS.
- **GUARDS SHALL BE LOCATED ALONG OPEN-SIDED WALKING** SURFACES, INCLUDING FLOORED ATTIC AREAS.



MATTAMY HOMES CHARLOTTE DIVISION PH: 704-375-9373

MATTAMY HOMES RALEIGH DIVISION PH: 919-752-4898

AROLI NORTH

CAR

22900571

CLEARWATER

03/18/2022

MATTAMY HOME

**GENERAL NOTES** 

## North Carolina INSULATION AND FENESTRATION REQUIREMENTS BY COMPONENT (note a)

	(11010 4)									
CLIMATE ZONE	FENESTRATION U-FACTOR (notes b, j)	SKYLIGHT U-FACTOR (note b)	GLAZED FENESTRATION SHGC (notes b, k)	CEILING R-VALUE (note m)	WOOD FRAME WALL R-VALUE	MASS WALL <i>R</i> -VALUE (note i)	FLOOR R-VALUE	BASEMENT WALL R-VALUE (notes c, o)	SLAB R-VALUE AND DEPTH (note d)	CRAWL SPACE WALL R-VALUE (note c)
3	0.35	0.55	0.30	38 or 30ci	15 or 13 + 2.5 (note h)	5/13 or 5/10ci	19	5/13 (note f)	0	5/13
4	0.35	0.55	0.30	38 or 30ci	15 or 13 + 2.5 (note h)	5/13 or 5/10ci	19	10/15	10	10/15
5	0.35	0.55	NR	38 or 30ci	19 (note n) or 13 + 5 or 15 + 3 (note h)	13/17 or 13/12.5ci	30 (note g)	10/15	10	10/19

- a.  $\it R\text{-VALUES}$  are minimums.  $\it U\text{-FACTORS}$  and shgc are maximums.
- b. THE FENESTRATION *U*-FACTOR COLUMN EXCLUDES SKYLIGHTS. THE SHGC COLUMN APPLIES TO ALL GLAZED FENESTRATION.
- c. "10/15" MEANS R-10 CONTINUOUS INSULATED SHEATHING ON THE INTERIOR OR EXTERIOR OF THE HOME OR R-15 CAVITY INSULATION AT THE INTERIOR OF THE BASEMENT WALL OR CRAWL SPACE WALL.
- d. R-5 SHALL BE ADDED TO THE REQUIRED SLAB EDGE R-VALUES FOR HEATED SLABS. FOR MONOLITHIC SLABS, INSULATION SHALL BE APPLIED FROM THE INSPECTION GAP DOWNWARD TO THE BOTTOM OF THE FOOTING OR A MAXIMUM OF 24 INCHES BELOW GRADE, WHICHEVER IS LESS. FOR FLOATING SLABS, INSULATION SHALL EXTEND TO THE BOTTOM OF THE FOUNDATION WALL OR 24", WHICHEVER IS LESS.
- NOT USED
- f. BASEMENT WALL INSULATION IS NOT REQUIRED IN WARM-HUMID LOCATIONS AS DEFINED BY FIGURE N1101.7 AND TABLE N1101.7.
- g. OR INSULATION SUFFICIENT TO FILL THE FRAMING CAVITY, R-19 MINIMUM.
- h. THE FIRST VALUE IS CAVITY INSULATION, THE SECOND VALUE IS CONTINUOUS INSULATION, SO "13 + 5" MEANS R-13 CAVITY INSULATION PLUS R-5 CONTINUOUS INSULATION. IF STRUCTURAL SHEATHING COVERS 25 PERCENT OR LESS OF THE EXTERIOR, INSULATING SHEATHING IS NOT REQUIRED WHERE STRUCTURAL SHEATHING IS USED. IF STRUCTURAL SHEATHING COVERS MORE THAN 25 PERCENT OF EXTERIOR, STRUCTURAL SHEATHING SHALL BE SUPPLEMENTED WITH INSULATED SHEATHING OF AT LEAST R-2.

- THE SECOND R-VALUE APPLIES WHEN MORE THAN HALF THE INSULATION IS ON THE INTERIOR OF THE MASS WALL.
- j. IN ADDITION TO THE EXEMPTION IN SECTION N1102.3.3, A MAXIMUM OF TWO GLAZED FENESTRATION PRODUCT ASSEMBLIES HAVING A U-FACTOR NO GREATER THAN 0.55 SHALL BE PERMITTED TO BE SUBSTITUTED FOR MINIMUM CODE COMPLIANT FENESTRATION PRODUCT ASSEMBLIES WITHOUT PENALTY.
- k. IN ADDITION TO THE EXEMPTION IN SECTION N1102.3.3, A MAXIMUM OF TWO GLAZED FENESTRATION PRODUCT ASSEMBLIES HAVING A SHGC NO GREATER THAN 0.70 SHALL BE PERMITTED TO BE SUBSTITUTED FOR MINIMUM CODE COMPLIANT FENESTRATION PRODUCT ASSEMBLIES WITHOUT PENALTY.
- I. R-30 SHALL BE DEEMED TO SATISFY THE CEILING INSULATION REQUIREMENT WHEREVER THE FULL HEIGHT OF UNCOMPRESSED R-30 INSULATION EXTENDS OVER THE WALL TOP PLATE AT THE EAVES. OTHERWISE R-38 INSULATION IS REQUIRED WHERE ADEQUATE CLEARANCE EXISTS OR INSULATION MUST EXTEND TO EITHER THE INSULATION BAFFLE OR WITHIN 1" OF THE ATTIC ROOF DECK.
- m. TABLE VALUE REQUIRED EXCEPT FOR ROOF EDGE WHERE THE SPACE IS LIMITED BY THE PITCH OF THE ROOF, THERE THE INSULATION MUST FILL THE SPACE UP TO THE AIR BAFFLE.
- n. R-19 FIBERGLASS BATTS COMPRESSED AND INSTALLED IN A NOMINAL 2x6 FRAMING CAVITY IS DEEMED TO COMPLY. FIBERGLASS BATTS RATED R-19 OR HIGHER COMPRESSED AND INSTALLED IN A 2x4 WALL IS NOT DEEMED TO COMPLY.
- O. BASEMENT WALL MEETING THE MINIMUM MASS WALL SPECIFIC HEAT CONTENT REQUIREMENT MAY USE THE MASS WALL R-VALUE AS THE MINIMUM REQUIREMENT.



MATTAMY HOMES
CHARLOTTE DIVISION
PH: 704-375-9373

MATTAMY HOMES RALEIGH DIVISION PH: 919-752-4898

ENGINEERING DESIGN - ENERGY

S COASSULING PLC; 8600 19 JERSEY CT. RALEIGH, NO 27617 919 480 107:
INFO@JDSCONSULTING.NET.

MATTAMY HOMES

ECT NO.: **22900571** 

CLEARWATER

DATE: **03/18/2022** 

022 CAR


CAROLINA

NORTH

GENERAL NOTES


T1.3

USE CORROSION-RESISTANT FLASHING AT ALL ROOF-TO-WALL INTERSECTIONS

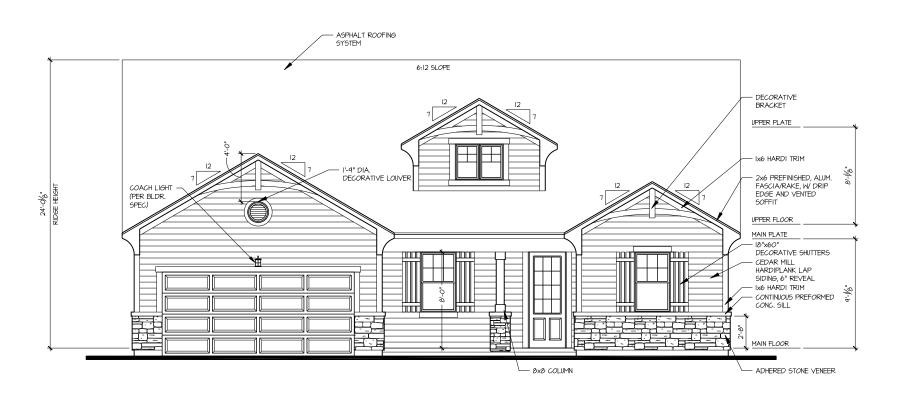

## FRONT ELEVATION - FRENCH COUNTRY

SCALE: 1/8" = 1'-0"

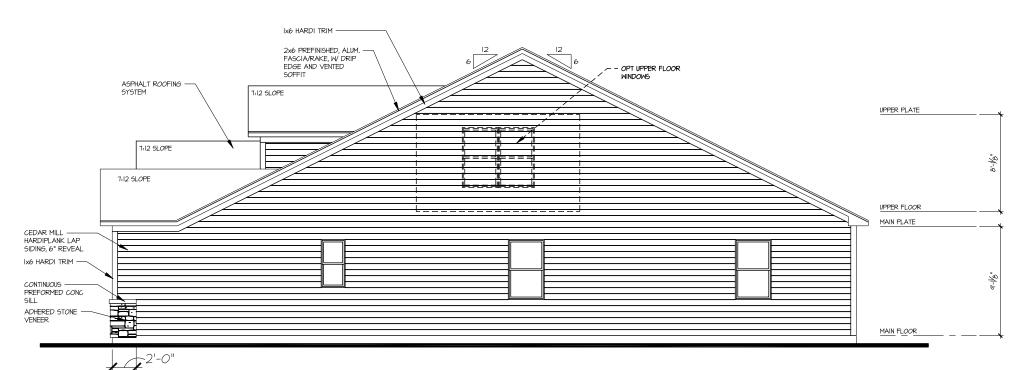

## RIGHT SIDE ELEVATION - FRENCH COUNTRY

SCALE: 1/8" = 1'-0"

mattamyHoMES

MATTAMY HOMES
CHARLOTTE DIVISION
PH: 704-375-9373

MATTAMY HOMES
RALEIGH DIVISION
PH: 919-752-4898

ENGINEERING DESIGN - ENERGY UNING PLC: 8600 TO JERSEY CT. RALEIGH, NC 27617 919-480.1075 FO@JDSCONSULTING.NET

CLEARWATER - LH
CATION:
NORTH CAROLINA

TNO.: **22900571** 


DATE: 03/18/2022

MATTAMY HOMES

CAR

**EXTERIOR ELEVATIONS** 

USE CORROSION-RESISTANT FLASHING AT ALL ROOF-TO-WALL INTERSECTIONS

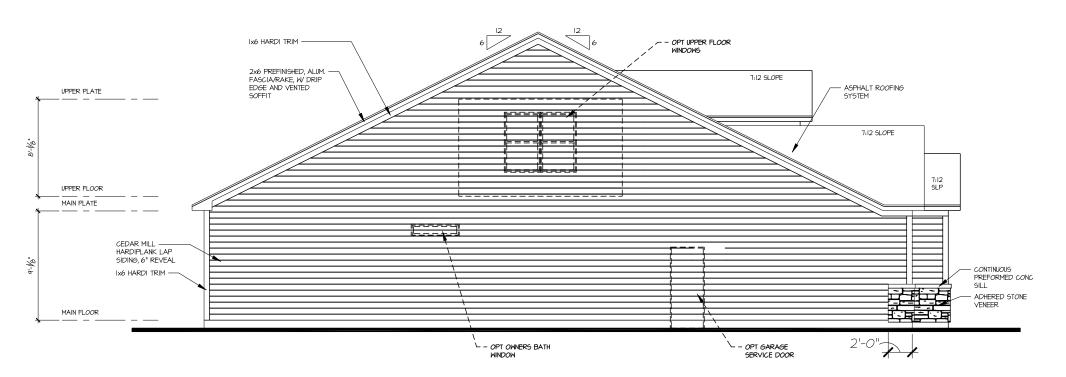

## LEFT SIDE ELEVATION - FRENCH COUNTRY

SCALE: 1/8" = 1'-9"

ASPIALT ROZFING
SYSTEM

BEER PLATE

JOB PRETINSHED ALIM
PAGGIARANE M DRIP
EDGE ARV VENTED
SOFFIT

CEDAR MILL
HARDIT RIM

MAIN PLATE

## REAR ELEVATION - FRENCH COUNTRY

SCALE: 1/8" = 1'-0"

mattamyHoMES

MATTAMY HOMES
CHARLOTTE DIVISION
PH: 704-375-9373

MATTAMY HOMES
RALEIGH DIVISION
PH: 919-752-4898

ENGINEERING DESIGN - ENERGY (@)DSCONSULTING.NET; www.jbsconsulting.net; www.jbsconsulting.net

DDS Consulting PLLC IS NO CONSTRUCTION METHOD BY CONTRACTOR OR BY THE LOT VOMBER, PROPER SHEET. DIMENSIONS SHEET.

CLEARWATER - LH
CATION:
NORTH CAROLINA

ECT NO.: **22900571** 


DATE: 03/18/2022

MATTAMY HOMES

CAR


**EXTERIOR ELEVATIONS** 

 $\overline{0.11}$ 

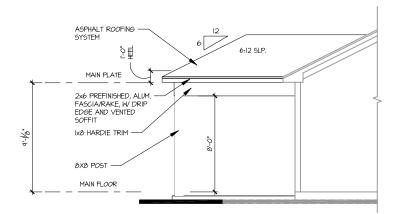


# LEFT ELEVATION COVERED VERANDA

SCALE: 1/8" = 1'-0"

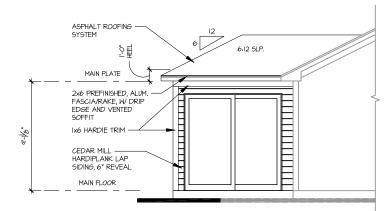


# LEFT ELEVATION - MORNING ROOM

SCALE: 1/8" = 1'-0"

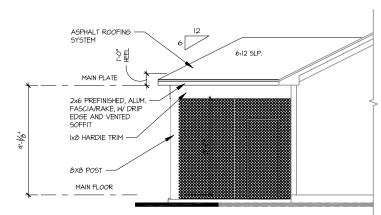


## LEFT ELEVATION -SCREENED VERANDA

SCALE: 1/8" = 1'-0"

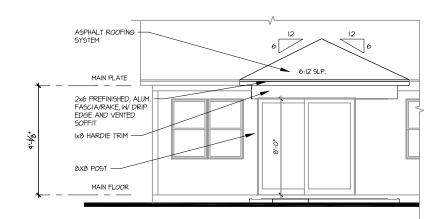


# REAR ELEVATION COVERED VERANDA

SCALE: 1/8" = 1'-0"

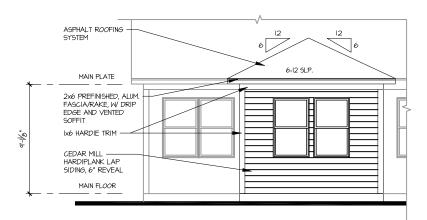

# REAR ELEVATION - MORNING ROOM


SCALE: 1/8" = 1'-0"

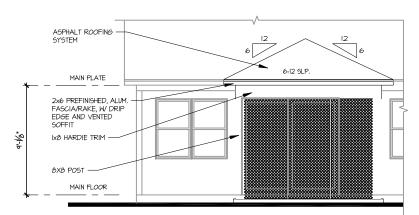

## REAR ELEVATION -SCREENED VERANDA


SCALE: 1/8" = 1'-0"

USE CORROSION-RESISTANT FLASHING AT ALL ROOF-TO-WALL INTERSECTIONS

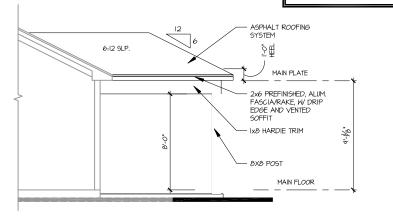


## RIGHT ELEVATION -COVERED VERANDA

SCALE: 1/8" = 1'-0"

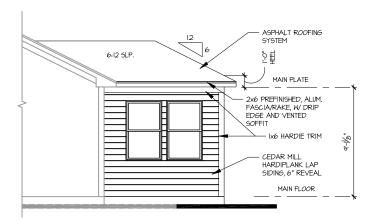

# RIGHT ELEVATION - MORNING ROOM

SCALE: 1/8" = 1'-0"

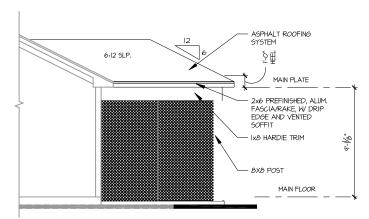

## RIGHT ELEVATION -SCREENED VERANDA

SCALE: 1/8" = 1'-0"



MATTAMY HOMES
CHARLOTTE DIVISION
PH: 704-375-9373

MATTAMY HOMES RALEIGH DIVISION PH: 919-752-4898

ERING • DESIGN • ENERGY

STAING • DESIGN • ENERGY

O'JERSEY CT, RALEIGH, NC 27617 919-480-1075

ING.NET; WWW.JDSCONSULTING.NET

ABLE FOR CHANGES MADE TO PLANS DUE TO

ANY CHANGES TO PLANS MADE IN THE FIELD

ESS. DRANNINGS ARE PROVIDED TO CLIENT FOR

DS Consulting PLLC; 8600 TO JERSI
NFO@JDSCONSULTING.NE
DDS Consulting PLLC IS NOT LIABLE I
CONSTRUCTION METHODS OR ANY I
BY CONTRACTOR OR BY OTHERS. DI
HELLOT NUMBER, PROPERTY, OR AS

CLEARWATER - LH

CATION:

NORTH CAROLINA

SCALE: 18" = 1-0" FOR 11417 PAPER. 14" = 1"-0" FOR 22x34 PAPER.

JECT NO.: **22900571** 

DATE: 03/18/2022

CAR

EXTERIOR ELEVATIONS



MATTAMY HOMES
CHARLOTTE DIVISION
PH: 704-375-9373

MATTAMY HOMES
RALEIGH DIVISION
PH: 919-752-4898



CLEARWATER - LH MATTAMY HOMES CAROLINA NORTH (


22900571

03/18/2022


DRAWN BY:

CAR

EXTERIOR ELEVATIONS

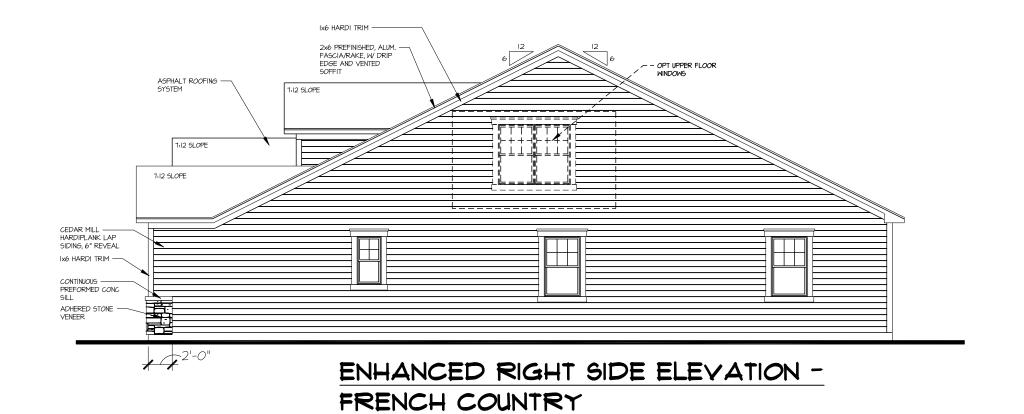

SCALE: 1/8" = 1'-0"

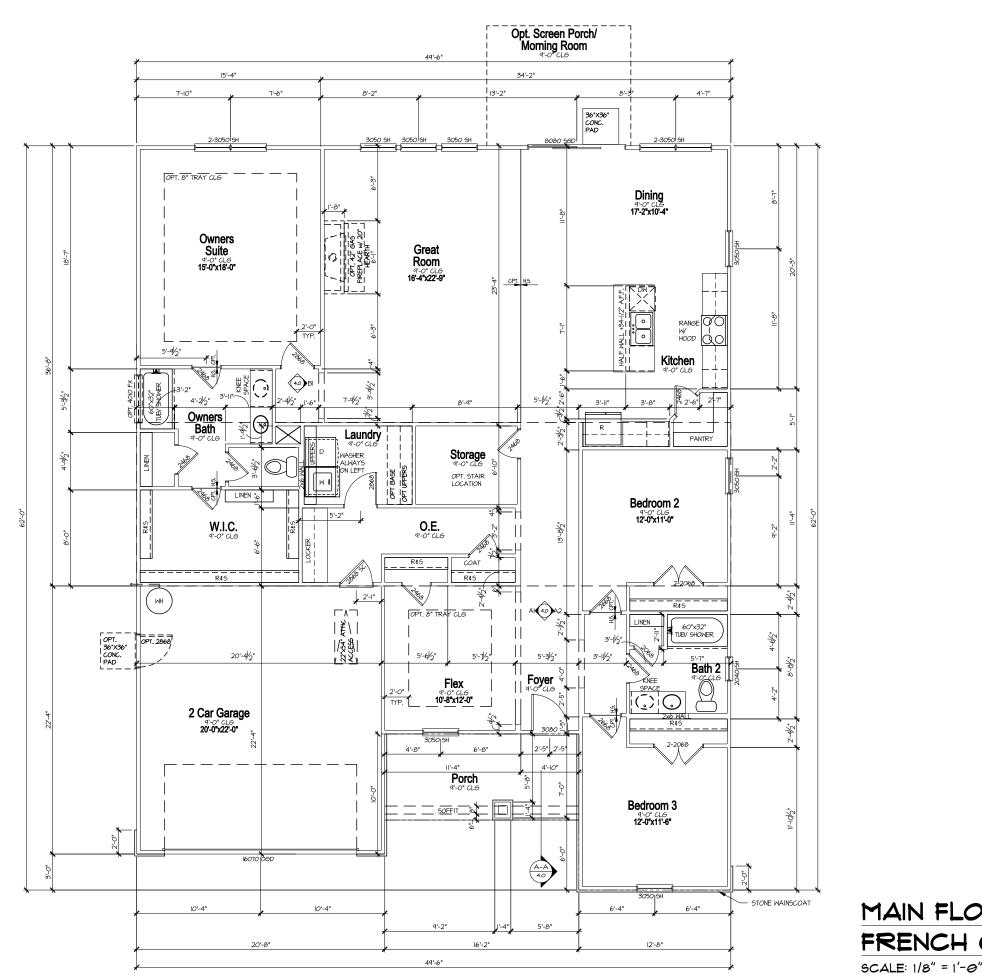

#### FLOOR PLAN NOTES

- ALL FRAMED OPENINGS (F.O.) @ 96" ON 1ST
- FLOOR & 84" ON 2ND FLOOR U.N.O. 4 SHELVES MAX. @ ALL LINEN & PANTRIES.
- INSTALL HOUSE WRAP AT ALL ATTIC WALLS NEXT TO HEATED SPACES I.L.O. T-PLY.
  REFER TO GARAGE FRAMING DETAIL ON SHT.
  MISC3 FOR GOAL POST FRAMING.

- ALL STUD POCKETS TO BE 4 1/2" (3) STUDS U.N.O.
  ALL STUDS BEHIND SHOWER STALLS @ 16" O.C.



MATTAMY HOMES
CHARLOTTE DIVISION
PH: 704-375-9373

MATTAMY HOMES
RALEIGH DIVISION
PH: 919-752-4898

CLEARWATER - LH CAROLINA NORTH

22900571


03/18/2022

MATTAMY HOMES

RAWN BY:

MAIN FLOOR PLAN

MAIN FLOOR PLAN -FRENCH COUNTRY

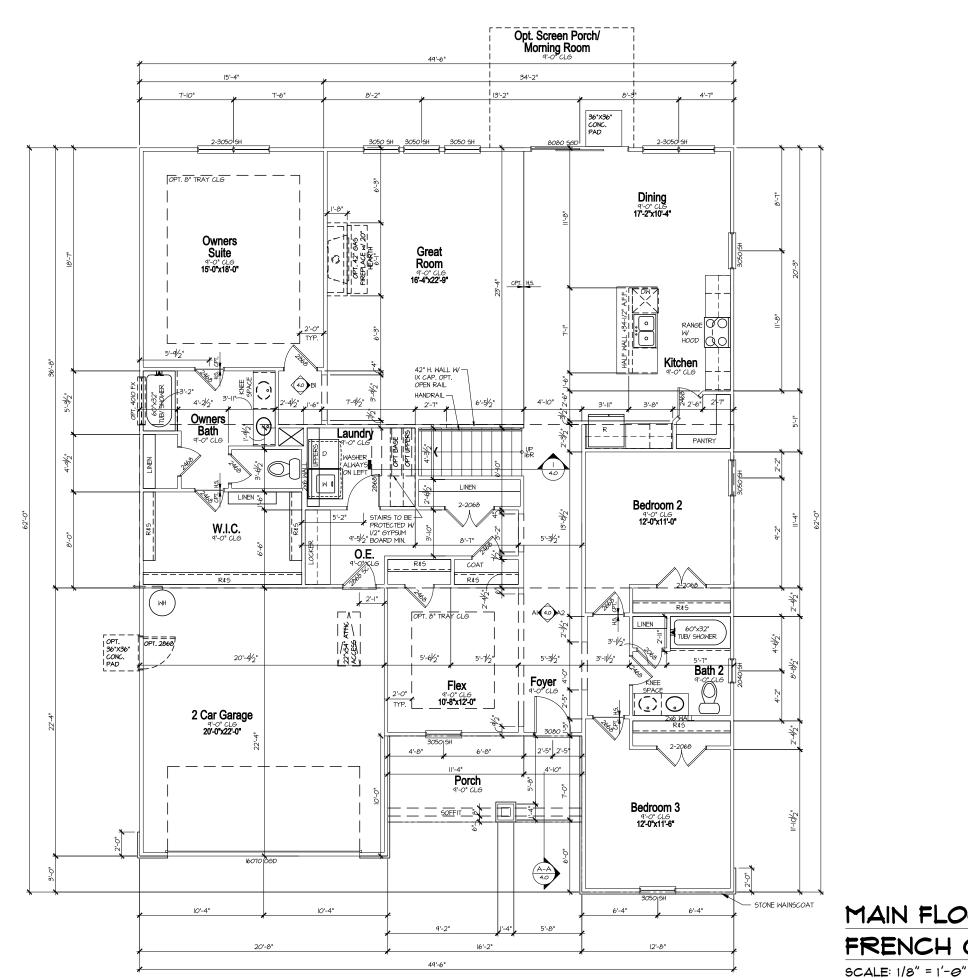

#### FLOOR PLAN NOTES

- ALL FRAMED OPENINGS (F.O.) @ 96" ON 1ST FLOOR & 84" ON 2ND FLOOR U.N.O.
- 4 SHELVES MAX. @ ALL LINEN & PANTRIES.
- INSTALL HOUSE WRAP AT ALL ATTIC WALLS NEXT TO HEATED SPACES I.L.O. T-PLY.
  REFER TO GARAGE FRAMING DETAIL ON SHT.
  MISC3 FOR GOAL POST FRAMING.

- ALL STUD POCKETS TO BE 4 1/2" (3) STUDS U.N.O.
  ALL STUDS BEHIND SHOWER STALLS @ 16" O.C.

**mattamy**HOMES

MATTAMY HOMES
CHARLOTTE DIVISION
PH: 704-375-9373

MATTAMY HOMES
RALEIGH DIVISION
PH: 919-752-4898

CLEARWATER - LH

CAROLINA NORTH

22900571


DATE: 03/18/2022

MATTAMY HOMES

ORAWN BY:


MAIN FLOOR PLAN WITH LOFT ABOVE

MAIN FLOOR PLAN W/ LOFT -FRENCH COUNTRY




## PPO - SIGNATURE KITCHEN

SCALE: 1/8" = 1'-0"

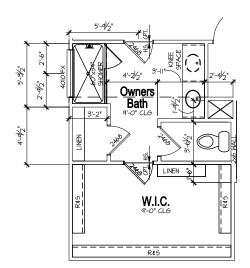


## PPO - OWNERS BATH STAND IN SHOWER

SCALE: 1/8" = 1'-0"



## PPO - STUDY -FRENCH COUNTRY


SCALE: 1/8" = 1'-0"

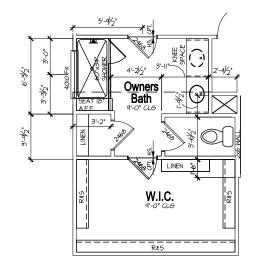

## PPO - OWNERS BATH STAND IN SHOWER W/ SEAT

W.I.C.

# SCALE: 1/8" = 1'-0"

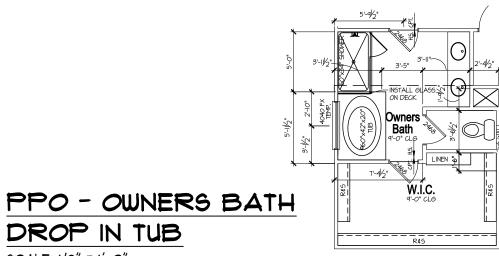

#### **FLOOR PLAN NOTES**

- ALL FRAMED OPENINGS (F.O.) @ 96" ON 1ST FLOOR & 84" ON 2ND FLOOR U.N.O.
- 4 SHELVES MAX. @ ALL LINEN & PANTRIES.
- INSTALL HOUSE WRAP AT ALL ATTIC WALLS NEXT TO HEATED SPACES I.L.O. T-PLY. REFER TO GARAGE FRAMING DETAIL ON SHT.
- MISC3 FOR GOAL POST FRAMING.
- ALL STUD POCKETS TO BE 4 1/2" (3) STUDS U.N.O.
- ALL STUDS BEHIND SHOWER STALLS @ 16" O.C.



MATTAMY HOMES CHARLOTTE DIVISION PH: 704-375-9373

MATTAMY HOMES **RALEIGH DIVISION** PH: 919-752-4898



CAROLINA CLEARWATER

22900571


03/18/2022

MAIN FLOOR PLAN OPTIONS

RAWN BY:

CAR

## PPO - OWNERS BATH SUPER SHOWER SCALE: 1/8" = 1'-0"

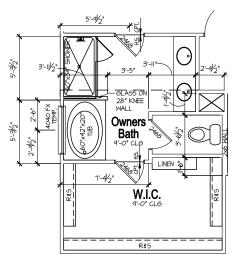

## PPO - OWNERS BATH SLIDE IN TUB


SCALE: 1/8" = 1'-0"

SCALE: 1/8" = 1'-0"

MAIN FLOOR PLAN OPTIONS -FRENCH COUNTRY


SCALE: 1/8" = 1'-0"

DROP IN TUB

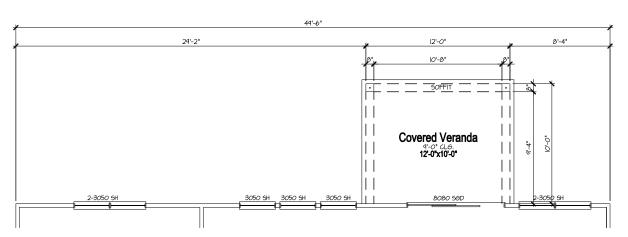


## COYERED YERANDA

SCALE: 1/8" = 1'-0"

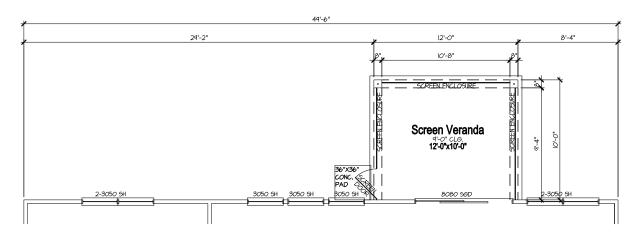

## SCREENED YERANDA

SCALE: 1/8" = 1'-0"

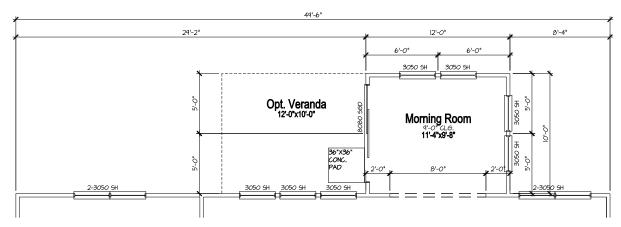

## MORNING ROOM

SCALE: 1/8" = 1'-0"

#### FLOOR PLAN NOTES

- ALL FRAMED OPENINGS (F.O.) @ 96" ON 1ST FLOOR & 84" ON 2ND FLOOR U.N.O.
- 4 SHELVES MAX. @ ALL LINEN & PANTRIES.
- INSTALL HOUSE WRAP AT ALL ATTIC WALLS NEXT TO HEATED SPACES I.L.O. T-PLY. REFER TO GARAGE FRAMING DETAIL ON SHT.
- MISC3 FOR GOAL POST FRAMING.
- ALL STUD POCKETS TO BE 4 1/2" (3) STUDS U.N.O.
  ALL STUDS BEHIND SHOWER STALLS @ 16" O.C.



MATTAMY HOMES CHARLOTTE DIVISION PH: 704-375-9373

MATTAMY HOMES RALEIGH DIVISION PH: 919-752-4898



CLEARWATER - LH CAROLINA


22900571 ORAWN BY:

03/18/2022

MAIN FLOOR PLAN OPTIONS

MAIN FLOOR PLAN OPTIONS -FRENCH COUNTRY

SCALE: 1/8" = 1'-0"

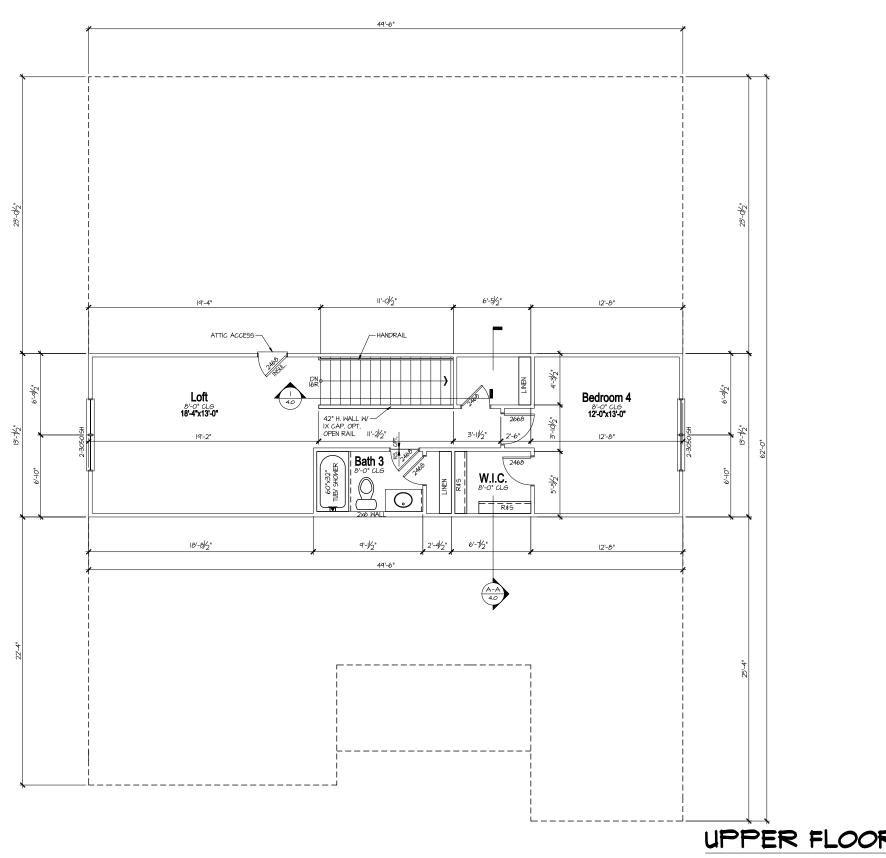

#### FLOOR PLAN NOTES

- ALL FRAMED OPENINGS (F.O.) @ 96" ON 1ST FLOOR & 84" ON 2ND FLOOR U.N.O. 4 SHELVES MAX. @ ALL LINEN & PANTRIES.
- INSTALL HOUSE WRAP AT ALL ATTIC WALLS NEXT
  TO HEATED SPACES I.L.O. T-PLY.
  REFER TO GARAGE FRAMING DETAIL ON SHT.
  MISC3 FOR GOAL POST FRAMING.
- ALL STUD POCKETS TO BE 4 1/2" (3) STUDS U.N.O.
  ALL STUDS BEHIND SHOWER STALLS @ 16" O.C.



MATTAMY HOMES
CHARLOTTE DIVISION
PH: 704-375-9373

MATTAMY HOMES
RALEIGH DIVISION
PH: 919-752-4898

CLEARWATER - LH CAROLINA

22900571

03/18/2022


DRAWN BY:


CAR


UPPER FLOOR PLAN

UPPER FLOOR PLAN -FRENCH COUNTRY


SCALE: 1/8" = 1'-0"

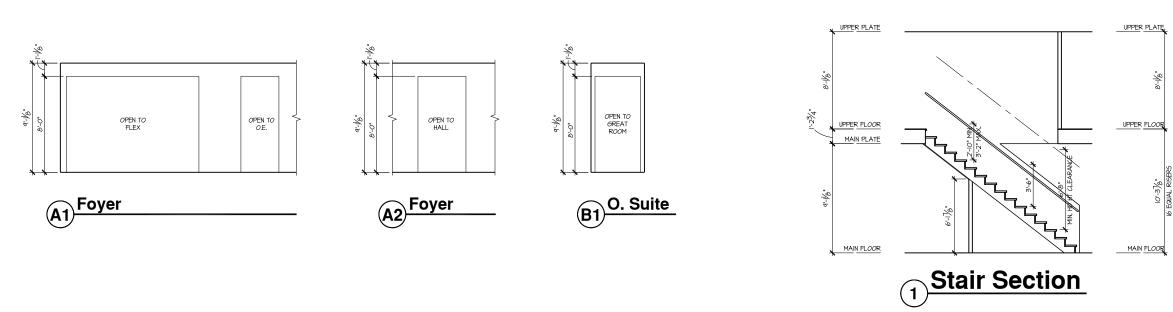


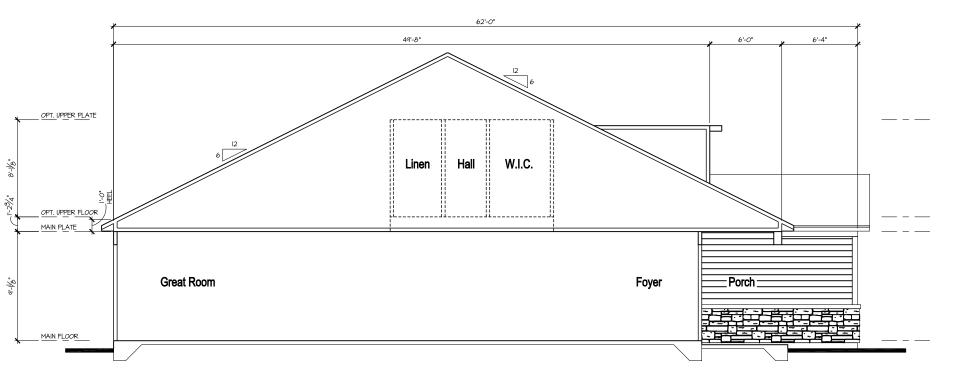

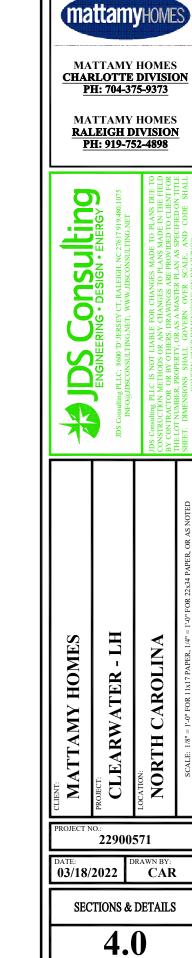

A-A

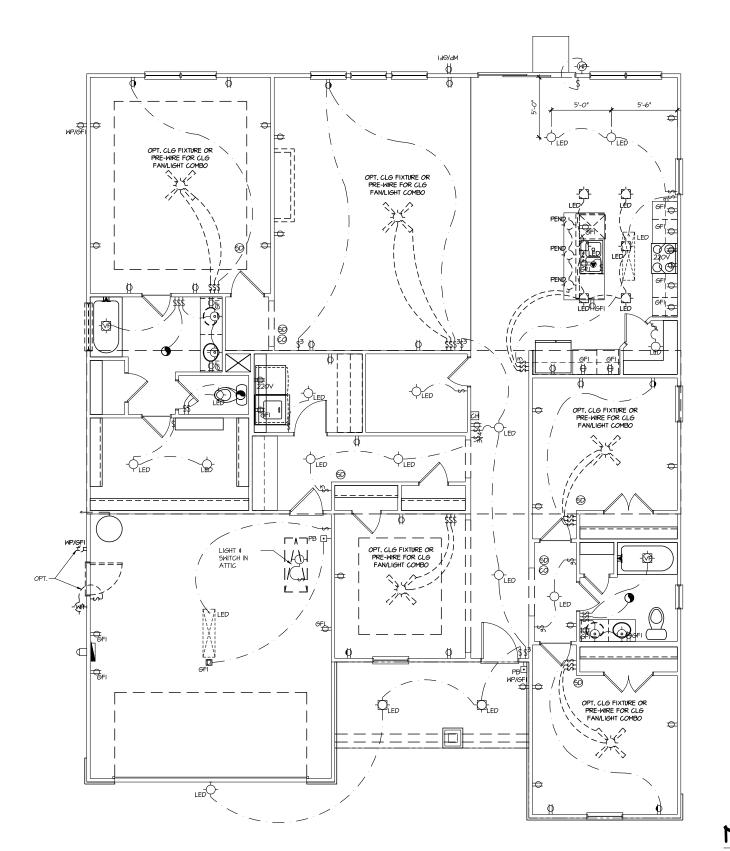

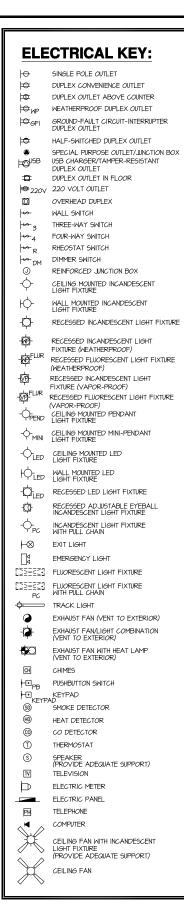

## MAIN FLOOR ELECTRICAL PLAN -FRENCH COUNTRY

SCALE: 1/8" = 1'-0"



MATTAMY HOMES
CHARLOTTE DIVISION
PH: 704-375-9373

MATTAMY HOMES RALEIGH DIVISION PH: 919-752-4898

ENERGY
C27617 919.480.1075
ULTING.NET
DE TO PLANS DUE TO
NS MADE IN THE FIELD

D JESSET CL. RALEIGH, N. C. 2017 919-903. ING.NET; WWW.JDSCONSULTING.NET IABLE FOR CHANGES MADE TO PLANS I R. ANY CHANGES TO PLANS MADE IN THI

JDS Consulting PLLC; 8600 TO JERSE;
INFO@JDSCONSULTING.NET;
S Consulting PLLC IS NOT LIABLE FG
NNSTRUCTION METHODS OR ANY CI

NORTH CAROLINA


CLEARWATER
LOCATION:
NORTH CAROL


DJECT NO.: 22900571

DATE: **03/18/2022** 

CAR

MAIN FLOOR ELECTRICAL PLAN

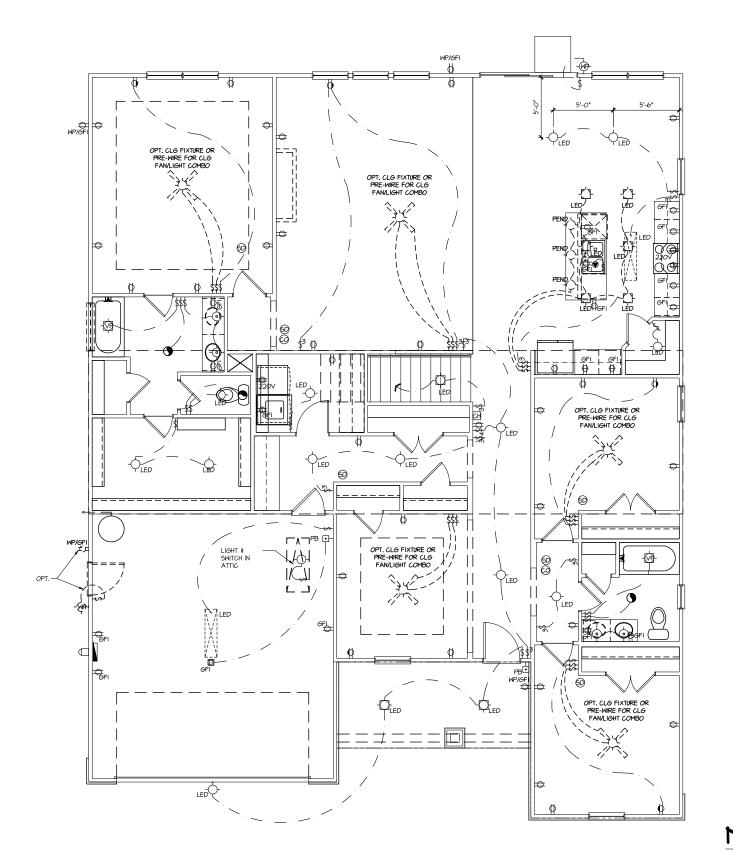

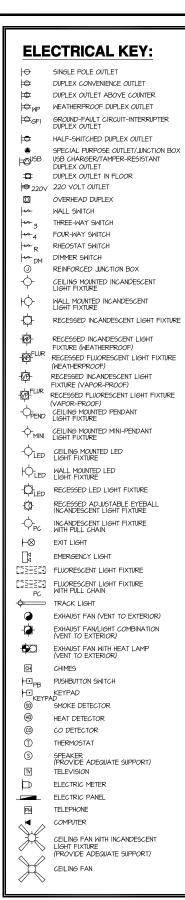

## MAIN FLOOR ELECTRICAL PLAN W/ LOFT - FRENCH COUNTRY

SCALE: 1/8" = 1'-0"



MATTAMY HOMES
CHARLOTTE DIVISION
PH: 704-375-9373

MATTAMY HOMES RALEIGH DIVISION PH: 919-752-4898

ENERGY
ENERGY
LITING.NET
ET O PLANS DUE TO
MANDE IN THE FIELD

EY CT, RALEIGH, NC 27617 919-480.1075 T; WWW.JDSCONSULTING.NET FOR CHANGES MADE TO PLANS DUF

CORSULING PLLC; 8600 'D' JERSEY CT, RALEI INFO@JDSCONSULTINGNET; WWW.JDS sulting PLLC; IS NOT I JARIF FOR CHANGE

JDS Consulting PL
CONSTRUCTION
BY CONTRACTO
BY ELOT WIMBE

2x34 PAPER, OR AS NOTED

I CAROLINA

E 2


CLEARWATER

22900571

DATE: 03/18/2022


CAR

MAIN FLOOR ELECTRICAL PLAN WITH LOFT ABOVE




## PPO - SIGNATURE KITCHEN

SCALE: 1/8" = 1'-0"

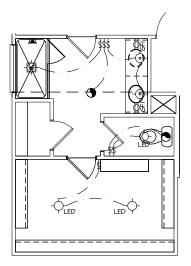


## PPO - OWNERS BATH STAND IN SHOWER

SCALE: 1/8" = 1'-0"




## PPO - STUDY -FRENCH COUNTRY

SCALE: 1/8" = 1'-0"

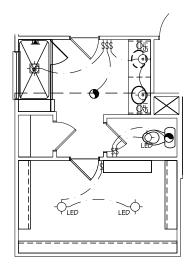

## PPO - OWNERS BATH STAND IN SHOWER W/ SEAT


SCALE: 1/8" = 1'-0"

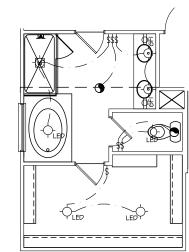

# 2 - OWNERS BA


## PPO - OWNERS BATH SUPER SHOWER

SCALE: 1/8" = 1'-0"

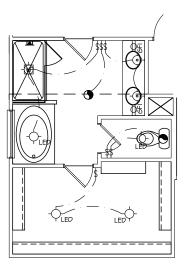

## PPO - OWNERS BATH SLIDE IN TUB

SCALE: 1/8" = 1'-0"

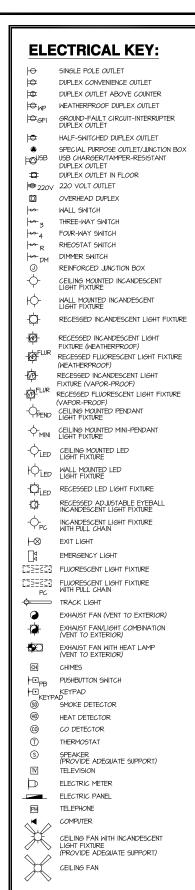

## PPO - OWNERS BATH DROP IN TUB

SCALE: 1/8" = 1'-0"

MAIN FLOOR PLAN ELECTRICAL OPTIONS - FRENCH COUNTRY

SCALE: 1/8" = 1'-@"

22900571

DATE: DRAW
03/18/2022

CLEARWATER

03/18/2022 CAR
MAIN FLOOR ELECTRICAL

CAROLINA

mattamyHOMES

MATTAMY HOMES

CHARLOTTE DIVISION


PH: 704-375-9373


MATTAMY HOMES

RALEIGH DIVISION

PH: 919-752-4898


PLAN OPTIONS

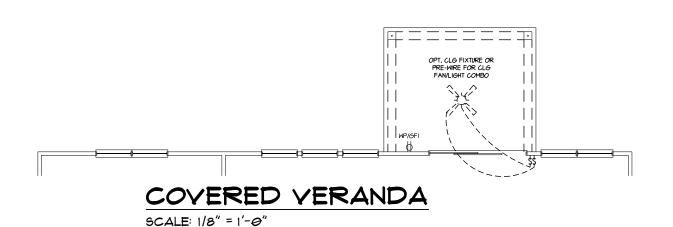

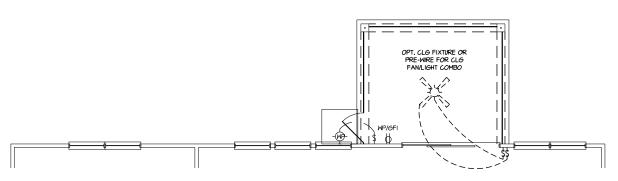


## SCREENED YERANDA

SCALE: 1/8" = 1'-0"

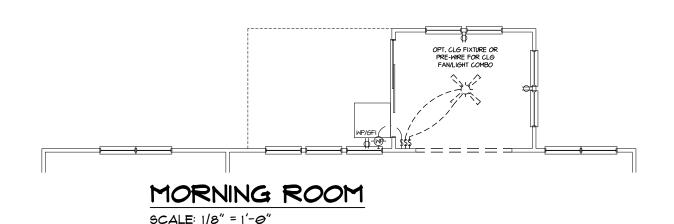

SCALE: 1/8" = 1'-0"

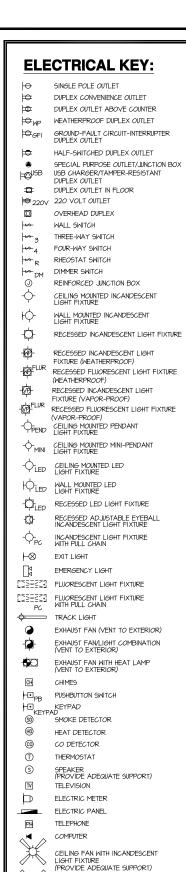

CEILING FAN



**CAROLINA** CLEARWATER

NORTH

22900571


03/18/2022


MATTAMY HOMES

CAR

MAIN FLOOR ELECTRICAL PLAN OPTIONS

MAIN FLOOR PLAN ELECTRICAL OPTIONS - FRENCH COUNTRY

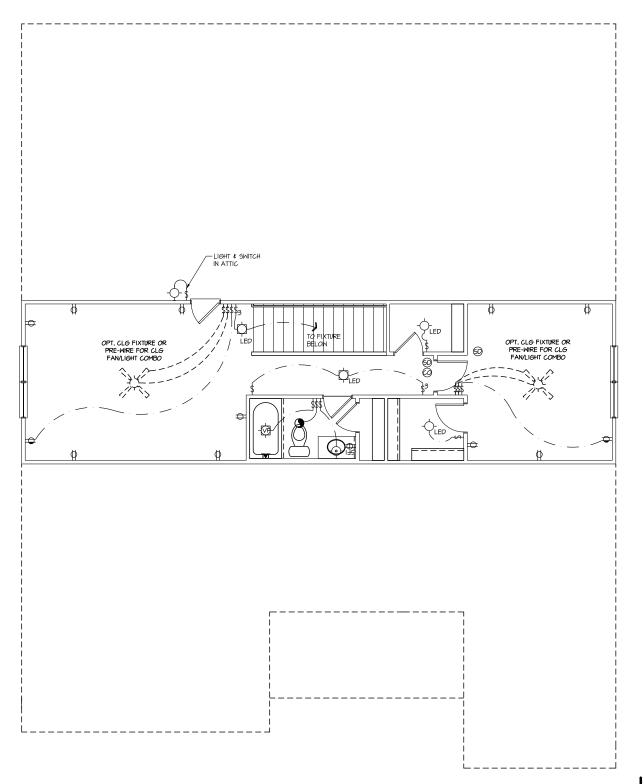

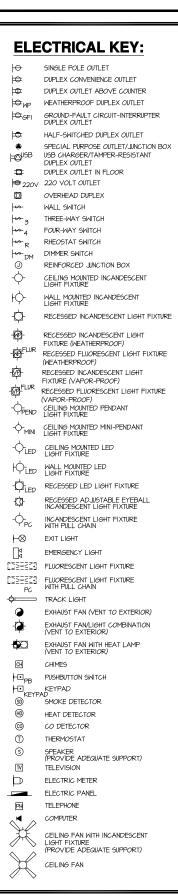

# UPPER FLOOR ELECTRICAL PLAN - FRENCH COUNTRY

SCALE: 1/8" = 1'-0"



MATTAMY HOMES
CHARLOTTE DIVISION
PH: 704-375-9373

MATTAMY HOMES RALEIGH DIVISION PH: 919-752-4898

SIGN • ENERGY
LEIGH, NC27617 919,480,1075
LDSCONSULTING,NET
NGES MADE TO PLANS DUE TO
TYO PRANS MADE IN THE FIELD
TO PRANS MADE IN THE FIELD

ENGINEERING • DESIGN • ENERGINING • DESIGN • ENERGING • DESERT CT. RALEIGH, NC 27617 91 (@JDSCONSULTING.NET; WWW.JDSCONSULTING.N.)

TH CAROLINA

T NO.: **22900571** 

CLEARWATER

DATE: **03/18/2022** 

MATTAMY HOMES

22 CAR

UPPER FLOOR ELECTRICAL PLAN

## STRUCTURAL PLANS FOR:



## MATTAMY HOMES - CLEARWATER LH

PLAN R	PLAN RELEASE / REVISIONS					
REV. DATE	ARCH PLAN VERSION	REVISION DESCRIPTION	DRFT			

## **NOTES**

- 1. ENGINEER'S SEAL APPLIES TO STRUCTURAL COMPONENTS ONLY. ENGINEER'S SEAL DOES NOT CERTIFY DIMENSIONAL ACCURACY OR ARCHITECTURAL LAYOUT, INCLUDING ROOF GEOMETRY. JDS Consulting, PLLC ASSUMES NO LIABILITY FOR CHANGES MADE TO THESE PLANS BY OTHERS, OR FOR CONSTRUCTION METHODS, OR FOR ANY DEVIATION FROM THE PLANS, ENGINEER TO BE NOTIFIED PRIOR TO CONSTRUCTION IF ANY DISCREPANCIES ARE NOTED ON THE
- 2. DIMENSIONS SHALL GOVERN OVER SCALE, AND CODE SHALL GOVERN OVER DIMENSIONS.
- 3. PLANS MUST HAVE SIGNED SEAL TO BE VALID AND ARE LIMITED TO THE FOLLOWING USES:
  - A. IF THESE PLANS ARE ISSUED AS A MASTER-PLAN SET, THE SET IS VALID FOR 18 MONTHS FROM THE DATE ON THE SEAL, UNLESS ANY CODE-REQUIRED UPDATES ARE PLACED IN EFFECT BY THE MUNICIPALITY.
  - IF THESE PLANS ARE NOT ISSUED AS A MASTER-PLAN SET, THE SET IS VALID FOR A CONDITIONAL, ONE-TIME USE FOR THE LOT OR ADDRESS SPECIFIED ON THE

## CODE

ALL CONSTRUCTION, WORKMANSHIP, AND MATERIAL QUALITY AND

2018 **NORTH CAROLINA STATE BUILDING CODE:** RESIDENTIAL CODE

### **ENGINEER OF RECORD**

JDS Consulting, PLLC **ENGINEERING - DESIGN - ENERGY** 8600 'D' JERSEY COURT RALEIGH, NC 27617 FIRM LIC. NO: P-0961 **PROJECT REFERENCE: 21902779** 



**mattamy**HOMES

21902779

01/10/2022

**TMB** 

TITLE SHEET

NOTE: ALL CHAPTERS, SECTIONS, TABLES, AND FIGURES CITED WITHOUT A PUBLICATION TITLE ARE FROM THE APPLICABLE RESIDENTIAL CODE (SEE TITLE SHEET).

#### **GENERAL**

- 1. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION, FURTHERMORE CONTRACTOR IS ULTIMATELY RESPONSIBLE FOR CONSTRUCTION MEANS, METHODS, AND SAFETY ON SITE, NOTIFY JDS Consulting. PLLC IMMEDIATELY IF DISCREPANCIES ON PLAN EXIST.
- BRACED-WALL DESIGN IS BASED ON SECTION R602.10 WALL **BRACING. PRIMARY PRESCRIPTIVE METHOD TO BE CS-WSP. SEE** WALL BRACING PLANS AND DETAILS FOR ADDITIONAL
- ALL NON-PRESCRIPTIVE SOLUTIONS ARE BASED ON GUIDELINES ESTABLISHED IN THE AMERICAN SOCIETY OF CIVIL ENGINEERS PUBLICATION ASCE 7 AND THE NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION - SPECIAL DESIGN PROVISIONS FOR
- SEISMIC DESIGN SHALL BE PER SECTION R301.2.2 SEISMIC PROVISIONS. INCLUDING ASSOCIATED TABLES AND FIGURES. BASED ON LOCAL SEISMIC DESIGN CATEGORY.

#### **DESIGN LOADS**

ASSUMED SO	II REARING	-CAPACITY	2 000 PSF

LIV	E	LC	AD	

**ULTIMATE DESIGN WIND SPEED** 115 MPH. EXPOSURE B GROUND SNOW 15 PSF 20 PSF

#### RESIDENTIAL CODE TABLE R301.5 LIVE LOAD (PSF DWELLING UNITS

SLEEPING ROOMS	30
ATTICS WITH STORAGE	20
ATTICS WITHOUT STORAGE	10
STAIRS	40
DECKS	40
EXTERIOR BALCONIES	60
PASSENGER VEHICLE GARAGES	50
FIRE ESCAPES	40
CHARDS AND HANDRAILS	200 (no

**GUARDS AND HANDRAILS** 200 (pounds, concentrated)

COMPONENT AND CLADDING LOADS, INCLUDING THOSE FOR DOORS AND WINDOWS, SHALL BE DERIVED FROM TABLES R301.2(2) AND R301.2(3) FOR A BUILDING WITH A MEAN ROOF HEIGHT OF 35 FEET, LOCATED IN EXPOSURE B.

**ABBREVIATIONS** KING STUD COLUMN LAMINATED VENEER LVL LUMBER MAXIMUM ABOVE FINISHED FLOOR MECH MECHANICAL ALTERNATE MANUFACTURER RRG BEARING MIN MINIMIIM

**BSMT** BASEMENT NTS **NOT TO SCALE** CANT CANTII EVER OA OC OVERALL CJ CEILING JOIST ON CENTER CEILING CLG PRESSURE TREATED PΤ CMU CONCRETE MASONRY UNIT RISER **CASED OPENING** REFRIGERATOR REF COL COLUMN RFG ROOFING CONC CONCRETE RO RS SC SF **ROUGH OPENING** CONT CONTINUOUS ROOF SUPPORT CLOTHES DRYER STUD COLUMN DBL DOUBLE SQUARE FOOT (FEET) DIAN DIAMETER SH SHELF / SHELVES **DOUBLE JOIST** SHEATHING SHOWER DΡ DEEP SIM SIMILAR DR DOUBLE RAFTER SINGLE JOIST DSF DOUBLE STUD POCKET STUD POCKET FΑ FACH SPECID SPECIFIED EACH END ΕE SQUARE SQ EQ **EQUAL** 

**EXTERIOR** 

**FOUNDATION** 

FLOOR(ING)

FIREPLACE

HOSE BIBB

**FOOTING** 

HANGER

FORCED-AIR UNIT

FINISHED FLOOR

JACK STUD COLUMN

FAU

FDN

FLR

FTG

HB

HGR

TREAD

TYPICAL

**TEMPERED GLASS** 

TOP OF CURB / CONCRETE

**UNLESS NOTED OTHERWISE** 

THICK(NESS)

TRIPLE JOIST

TRIPLE RAFTER

WATER HEATER

**EXTRA JOIST** 

**CLOTHES WASHER** 

WELDED WIRE FABRIC

TEMP

TJ

TOC

TR TYP

UNO

WH

WWF

#### **MATERIALS**

1. INTERIOR / TRIMMED FRAMING LUMBER SHALL BE #2 SPRUCE PINE FIR (SPF) WITH THE FOLLOWING DESIGN PROPERTIES (#2 SOUTHERN YELLOW PINE MAY BE SUBSTITUTED):

Fb = 875 PSI Fv = 70 PSI E = 1.4E6 PSI

2. FRAMING LUMBER EXPOSED TO WEATHER OR IN CONTACT WITH THE GROUND, CONCRETE, OR MASONRY SHALL BE PRESSURE TREATED #2 SOUTHERN YELLOW PINE (SYP) WITH THE FOLLOWING DESIGN PROPERTIES:

Fb = 975 PSI Fv = 95 PSI E = 1.6E6 PSI

3. LVL STRUCTURAL MEMBERS TO BE LAMINATED VENEER LUMBER WITH THE FOLLOWING MINIMUM DESIGN PROPERTIES:

Fb = 2600 PSI Fv = 285 PSI F = 1.9F6 PSI

PSL STRUCTURAL MEMBERS TO BE PARALLEL STRAND LUMBER WITH THE FOLLOWING MINIMUM DESIGN PROPERTIES:

Fb = 2900 PSI Fv = 290 PSI E = 2.0E6 PSI

5. LSL STRUCTURAL MEMBERS TO BE LAMINATED STRAND LUMBER WITH THE FOLLOWING MINIMUM DESIGN PROPERTIES:

Fb = 2250 PSI Fv = 400 PSI E = 1.55E6 PSI

- 6. STRUCTURAL STEEL WIDE-FLANGE BEAMS SHALL CONFORM TO ASTM A992. Fv = 50 KSI
- REBAR SHALL BE DEFORMED STEEL CONFORMING TO ASTM A615, GRADE 60.
- POURED CONCRETE COMPRESSIVE STRENGTH TO BE A MINIMUM 3,000 PSI AT 28 DAYS. MATERIALS USED TO PRODUCE CONCRETE SHALL COMPLY WITH THE APPLICABLE STANDARDS LISTED IN AMERICAN CONCRETE INSTITUTE STANDARD ACI 318 OR ASTM
- CONCRETE SUBJECT TO MODERATE OR SEVERE WEATHERING PROBABILITY PER TABLE R301.2(1) SHALL BE AIR-ENTRAINED WHEN REQUIRED BY TABLE R402.2.
- 10. CONCRETE MASONRY UNITS (CMU) SHALL CONFORM TO AMERICAN CONCRETE INSTITUTE PUBLICATION 530: BUILDING CODE REQUIREMENTS AND SPECIFICATIONS FOR MASONRY STRUCTURES AND COMPANION COMMENTARIES AND THE MASONRY SOCIETY PUBLICATION TMS 402/602: BUILDING CODE REQUIREMENTS AND SPECIFICATIONS FOR MASONRY STRUCTURES
- 11. MORTAR SHALL COMPLY WITH ASTM INTERNATIONAL STANDARD C270.
- 12. INDICATED MODEL NUMBERS FOR ALL METAL HANGERS, STRAPS, FRAMING CONNECTORS, AND HOLD-DOWNS ARE SIMPSON STRONG-TIE BRAND. EQUIVALENT USP BRAND PRODUCTS ARE
- 13. REFER TO I-JOIST EQUIVALENCE CHART ON I-JOIST DETAIL SHEET FOR SUBSTITUTION OF MANUFACTURER SERIES.

#### **FOUNDATION**

- MINIMUM ALLOWABLE SOIL BEARING CAPACITY IS ASSUMED TO BE 2,000 PSF, IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY SOIL BEARING CAPACITY IF UNSATISFACTORY CONDITIONS
- CONCRETE FOUNDATION WALLS TO BE SELECTED AND CONSTRUCTED PER SECTION R404 OR AMERICAN CONCRETE **INSTITUTE STANDARD ACI 318**
- MASONRY FOUNDATION WALLS TO BE SELECTED AND CONSTRUCTED PER SECTION R404 AND/OR AMERICAN CONCRETE INSTITUTE PUBLICATION 530: BUILDING CODE REQUIREMENTS AND SPECIFICATIONS FOR MASONRY STRUCTURES AND COMPANION COMMENTARIES AND/OR THE MASONRY SOCIETY PUBLICATION TMS 402/602: BUILDING CODE REQUIREMENTS AND SPECIFICATIONS FOR MASONRY STRUCTURES.
- CONCRETE WALL HORIZONTAL REINFORCEMENT TO BE PER TABLE R404.1.2(1) OR AS NOTED OR DETAILED. CONCRETE WALL VERTICAL REINFORCEMENT TO BE PER TABLES R404.1.2(3 AND 4) OR AS NOTED OR DETAILED. ALL CONCRETE WALLS SHALL COMPLY WITH APPLICABLE PROVISIONS OF CHAPTER 6.
  - A. TABLES ASSUME THAT WALLS HAVE PERMANENT LATERAL SUPPORT AT THE TOP AND BOTTOM.
  - B. FOUNDATION DRAINS ARE ASSUMED AT ALL WALLS PER SECTION R405
- PLAIN-MASONRY WALL DESIGN TO BE PER TABLE R404.1.1(1) OR AS NOTED OR DETAILED. MASONRY WALLS WITH VERTICAL REINFORCEMENT TO BE PER TABLES R404.1.1 (2 THROUGH 4) OR AS NOTED OR DETAILED. ALL MASONRY WALLS SHALL COMPLY WITH APPLICABLE PROVISIONS OF CHAPTER 6.
  - A. TABLES ASSUME THAT WALLS HAVE PERMANENT LATERAL SUPPORT AT THE TOP AND BOTTOM.
  - WALL REINFORCING SHALL BE PLACED ACCORDING TO FOOTNOTE (c) OF THE TABLES (REINFORCING IS NOT CENTERED IN WALL).
  - C. FOUNDATION DRAINS ARE ASSUMED AT ALL WALLS PER SECTION R405.
- WOOD SILL PLATES TO BE ANCHORED TO THE FOUNDATION WITH 1/2" DIAMETER ANCHOR BOLTS WITH MINIMUM 7" EMBEDMENT, SPACED A MAXIMUM OF 6'-0" OC AND WITHIN 12" FROM THE ENDS OF EACH PLATE SECTION, INSTALL MINIMUM (2) ANCHOR BOLTS PER SECTION. SEE SECTION R403.1.6 FOR SPECIFIC CONDITIONS.
- THE UNSUPPORTED HEIGHT OF SOLID MASONRY PIERS SHALL NOT **EXCEED TEN TIMES THEIR LEAST DIMENSION. UNFILLED, HOLLOW** PIERS MAY BE USED IF THE UNSUPPORTED HEIGHT IS NOT MORE THAN FOUR TIMES THEIR LEAST DIMENSION.
- CENTERS OF PIERS TO BEAR IN THE MIDDLE THIRD OF THE FOOTINGS, AND GIRDERS SHALL CENTER IN THE MIDDLE THIRD OF
- ALL FOOTINGS TO HAVE MINIMUM 2" PROJECTION ON EACH SIDE OF FOUNDATION WALLS (SEE DETAILS).
- 10. ALL REBAR NOTED IN CONCRETE TO HAVE AT LEAST 2" COVER FROM EDGE OF CONCRETE TO EDGE OF REBAR.
- 11. FRAMING TO BE FLUSH WITH FOUNDATION WALLS.
- 12. WITH CLASS 1 SOILS, VAPOR BARRIER AND CRUSHED STONE MAY BE OMITTED.

#### **FRAMING**

- 1. ALL BEARING HEADERS TO BE (2) 2x6 SUPPORTED W/ MIN (1) JACK STUD AND (1) KING STUD EACH END, UNO.
- 2. ALL NON-BEARING HEADERS TO BE (2) 2x4, UNO.
- NON-BEARING INTERIOR WALLS NOT MORE THAN 10' NOMINAL HEIGHT AND NOT SHOWN AS BRACED WALLS MAY BE FRAMED WITH 2x4 STUDS @ 24" OC.
- SOLID BLOCKING TO BE PROVIDED AT ALL POINT LOADS THROUGH FLOOR LEVELS TO THE FOUNDATION OR TO OTHER STRUCTURAL COMPONENTS.
- ALL BEAMS SPECIFIED ARE MINIMUM SIZES ONLY. LARGER MEMBERS MAY SUBSTITUTED AS NEEDED FOR EASE OF CONSTRUCTION.
- 6. ALL EXTERIOR WALLS TO BE FULLY SHEATHED WITH 7/16" OSB.
- PORCH / PATIO COLUMNS TO BE 4x4 MINIMUM PRESSURE-TREATED LUMBER.
  - A. ATTACH PORCH COLUMNS TO SLAB / FDN WALL USING ABA, ABU, ABW, OR CPT SIMPSON POST BASES TO FIT COLUMN SIZES NOTED ON PLAN -OR- ANY OTHER COLUMN CONNECTION WITH 500# UPLIFT CAPACITY.
  - ATTACH PORCH COLUMNS TO PORCH BEAMS USING AC OR BC SIMPSON POST CAPS TO FIT COLUMN SIZES NOTED ON PLAN -OR- ANY OTHER COLUMN CONNECTION WITH 500# UPLIFT CAPACITY.
  - C. TRIM OUT COLUMN(S) AND BEAM(S) PER BUILDER AND
- ALL ENGINEERED WOOD PRODUCTS (LVL, PSL, LSL, ETC.) SHALL BE INSTALLED WITH CONNECTIONS PER MANUFACTURER SPECIFICATIONS.
- 9. ENGINEERED WOOD FLOOR SYSTEMS AND ROOF TRUSS SYSTEMS: SHOP DRAWINGS FOR THE SYSTEMS SHALL BE PROVIDED. TO THE ENGINEER OF RECORD FOR REVIEW AND COORDINATION BEFORE CONSTRUCTION.
  - TRUSS PROFILES SHALL BE SEALED BY THE TRUSS MANUFACTURER.
  - INSTALLATION OF THE SYSTEMS SHALL BE PER MANUFACTURER'S INSTRUCTIONS.
  - TRUSS LAYOUT AND PLACEMENT BY MANUFACTURER TO COINCIDE WITH THE SUPPORT LOCATIONS SHOWN IN THESE
- 10. ALL BEAMS TO BE CONTINUOUSLY SUPPORTED LATERALLY AND SHALL BEAR FULL WIDTH ON THE SUPPORTING WALLS OR COLUMNS INDICATED, WITH A MINIMUM OF THREE STUDS, UNO.
- 11. ALL STEEL BEAMS TO BE SUPPORTED AT EACH END WITH A MIN BEARING LENGTH OF 3 1/2" AND FULL FLANGE WIDTH. BEAMS MUST BE ATTACHED AT EACH END WITH A MINIMUM OF FOUR 16d NAILS OR TWO 1/2" x 4" LAG SCREWS, UNO.
- 12. STEEL FLITCH BEAMS TO BE BOLTED TOGETHER USING (2) ROWS OF 1/2" DIAMETER BOLTS (ASTM 307) WITH WASHERS PLACED UNDER THE THREADED END OF THE BOLT, BOLTS TO BE SPACED AT 24" OC (MAX) AND STAGGERED TOP AND BOTTOM OF BEAM (2" EDGE DISTANCE), WITH TWO BOLTS TO BE LOCATED AT 6" FROM EACH END OF FLITCH BEAM.
- 13. WHEN A 4-PLY LVL BEAM IS USED, ATTACH WITH (1) 1/2" DIAMETER BOLT, 12" OC, STAGGERED TOP AND BOTTOM, 1 1/2" MIN FROM ENDS. ALTERNATE EQUIVALENT ATTACHMENT METHOD MAY BE USED, SUCH AS SDS, SDW, OR TRUSSLOK SCREWS (SEE MANUFACTURER SPECIFICATIONS).
- 14. FOR STUD COLUMNS OF 4-OR-MORE STUDS, INSTALL SIMPSON STRONG-TIE CS16 STRAPS ACROSS STUDS @ 30" OC, 6" MAX FROM PLATES, ON INSIDE FACE OF COLUMN (EXTERIOR WALL), ON BOTH FACES OF COLUMN (INTERIOR WALL).
- 15. FLOOR JOISTS ADJACENT AND PARALLEL TO THE EXTERIOR FOUNDATION WALL SHALL BE PROVIDED WITH FULL-DEPTH SOLID BLOCKING, NOT LESS THAN TWO (2) INCHES NOMINAL IN THICKNESS, PLACED PERPENDICULAR TO THE JOIST AT SPACING NOT MORE THAN FOUR (4) FEET. THE BLOCKING SHALL BE NAILED TO THE FLOOR SHEATHING, THE SILL PLATE, THE JOIST, AND THE EXTERIOR RIM JOIST / BOARD.
- 16. BRACED WALL PANELS SHALL BE FASTENED TO MEET THE **UPLIFT-RESISTANCE REQUIREMENTS IN CHAPTERS 6 AND 8 OF** THE APPLICABLE CODE (SEE TITLE SHEET). REQUIREMENTS OF THE STRUCTURAL DRAWINGS THAT EXCEED THE CODE MINIMUM SHALL BE MET.



P-0961

Jonsu

HOMES

ATTAMY

onsulting INFO@J

CAROLIN

CLEARWATER NORTH **mattamy**HOMES

**TMB** 

21902779

01/10/2022

**GENERAL NOTES** 

FASTENER SCHEDULE						
CONNECTION	3" x 0.131" NAIL	3" x 0.120" NAIL				
JOIST TO SILL PLATE	(4) TOE NAILS	(4) TOE NAILS				
SOLE PLATE TO JOIST / BLOCKING	NAILS @ 8" OC (typical) (4) PER 16" SPACE (at braced panels)	NAILS @ 8" OC (typical) (4) PER 16" SPACE (at braced panels)				
STUD TO SOLE PLATE	(4) TOE NAILS	(4) TOE NAILS				
TOP OR SOLE PLATE TO STUD	(3) FACE NAILS	(4) FACE NAILS				
RIM JOIST OR BAND JOIST TO TOP PLATE OR SILL PLATE	TOE NAILS @ 6" OC	TOE NAILS @ 4" OC				
BLOCKING BETWEEN JOISTS TO TOP PLATE OR SILL PLATE	(4) TOE NAILS	(4) TOE NAILS				
DOUBLE STUD	NAILS @ 8" OC	NAILS @ 8" OC				
DOUBLE TOP PLATES	NAILS @ 12" OC	NAILS @ 12" OC				
DOUBLE TOP PLATES LAP (24" MIN LAP LENGTH)	(12) NAILS IN LAPPED AREA, EA SIDE OF JOINT	(12) NAILS IN LAPPED AREA, EA SIDE OF JOINT				
TOP PLATE LAP AT CORNERS AND INTERSECTING WALLS	(3) FACE NAILS	(3) FACE NAILS				
OPEN-WEB TRUSS BOTTOM CHORD TO TOP PLATES OR SILL PLATE (PARALLEL TO WALL)	NAILS @ 6" OC	NAILS @ 4" OC				
BOTTOM CHORD OF TRUSS TO TOP PLATES OR SILL PLATE (PERPENDICULAR TO WALL)	(3) TOE NAILS	(3) TOE NAILS				

SEE TABLE R602.3(1) FOR ADDITIONAL STRUCTURAL-MEMBER FASTENING REQUIREMENTS.

DETAILS AND NOTES ON DRAWINGS GOVERN.

#### BALLOON WALL FRAMING SCHEDULE (USE THESE STANDARDS UNLESS NOTED OTHERWISE ON THE FRAMING PLAN SHEETS)

FRAMING MEMBER SIZE	MAX HEIGHT (PLATE TO PLATE)  115 MPH ULTIMATE DESIGN WIND SPEED
2x4 @ 16" OC	10'-0"
2x4 @ 12" OC	12'-0"
2x6 @ 16" OC	15'-0"
2x6 @ 12" OC	17'-9"
2x8 @ 16" OC	19'-0"
2x8 @ 12" OC	22'-0"
(2) 2x4 @ 16" OC	14'-6"
(2) 2x4 @ 12" OC	17'-0"
(2) 2x6 @ 16" OC	21'-6"
(2) 2x6 @ 12" OC	25'-0"
(2) 2x8 @ 16" OC (2) 2x8 @ 12" OC	27'-0" 31'-0"

- a. ALL HEIGHTS ARE MEASURED SUBFLOOR TO TOP OF WALL PLATE.
- b. WHEN SPLIT-FRAMED WALLS ARE USED FOR HEIGHTS OVER 12', THE CONTRACTOR SHALL ADD 6' MINIMUM OF CS16 COIL STRAPPING (FULLY NAILED), CENTERED OVER THE WALL BREAK.
- c. FINGER-JOINTED MEMBERS MAY BE USED FOR CONTINUOUS HEIGHTS WHERE TRADITIONALLY MILLED LUMBER LENGTHS ARE LIMITED.
- d. FOR GREATER WIND SPEED, SEE ENGINEERED SOLUTION FOR CONDITION IN DRAWINGS.

#### ROOF SYSTEMS

#### **TRUSSED ROOF - STRUCTURAL NOTES**

 PROVIDE CONTINUOUS BLOCKING THROUGH STRUCTURE FOR ALL POINT LOADS.



DENOTES OVER-FRAMED AREA

- 3. MINIMUM 7/16" OSB ROOF SHEATHING
- 4. TRUSS LAYOUT AND PLACEMENT BY MANUFACTURER TO COINCIDE WITH THE SUPPORT LOCATIONS SHOWN. TRUSS PROFILES SHALL BE SEALED BY THE TRUSS MANUFACTURER. TRUSS PLANS TO BE COORDINATED WITH THE SEALED STRUCTURAL DRAWINGS. INSTALLATION SHALL BE IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.
- 5. MANUFACTURER TO PROVIDE REQUIRED UPLIFT CONNECTION.
- 6. PROVIDE H2.5A (MINIMUM) OR EQUIVALENT AT EACH TRUSS-TO-TOP PLATE CONNECTION AT OVER-FRAMED AREAS, UNLESS NOTED OTHERWISE.
- UPLIFT CONNECTION TO BE CARRIED THROUGH TO FLOOR SYSTEM.

#### STICK-FRAMED ROOF - STRUCTURAL NOTES

- 1. PROVIDE 2x4 COLLAR TIES AT 48" OC AT UPPER THIRD OF RAFTERS. UNLESS NOTED OTHERWISE.
- 2. FUR RIDGES FOR FULL RAFTER CONTACT.
- PROVIDE CONTINUOUS BLOCKING THROUGH STRUCTURE FOR ALL POINT LOADS.



DENOTES OVER-FRAMED AREA

- 5. MINIMUM 7/16" OSB ROOF SHEATHING
- 6. PROVIDE 2x4 RAFTER TIES AT 16" OC AT 45° BETWEEN RAFTERS AND CEILING JOISTS. USE (4) 16d NAILS AT EACH CONNECTION. RAFTER TIES MAY BE SPACED AT 48" OC AT LOCATIONS WHERE NO KNEE WALLS ARE INSTALLED.
- PROVIDE H2.5A (MINIMUM) OR EQUIVALENT AT EACH RAFTER-TO-TOP PLATE CONNECTION AT OVER-FRAMED AREAS, UNLESS NOTED OTHERWISE.
- 8. UPLIFT CONNECTION TO BE CARRIED THROUGH TO FLOOR SYSTEM.

BRICK VENEER LINTEL SCHEDULE					
SPAN	STEEL ANGLE SIZE	END BEARING LENGTH			
UP TO 42"	L3-1/2"x3-1/2"x1/4"	8" (MIN. @ EACH END)			
UP TO 72"	8" (MIN. @ EACH END)				
OVER 72" L6"x4"x5/16"* (LLV) ATTACH LINTEL w/ 1/2" THRU BOLT @ 12" OC, 3" FROM EACH END					

\* FOR QUEEN BRICK: LINTELS AT THIS CONDITION MAY BE 5"x3-1/2"x5/16"

NOTE: BRICK LINTELS AT SLOPED AREAS TO BE 4"x3-1/2"x1/4" STEEL ANGLE WITH 16D NAILS IN 3/16" HOLES IN 4" ANGLE LEG AT 12" OC TO TRIPLE RAFTER. WHEN THE SLOPE EXCEEDS 4:12 A MINIMUM OF 3"x3"x1/4" PLATES SHALL BE WELDED AT 24" OC



P-0961



IN OGESCONSOLINGALL, WIN FEDERON IDS CONSULING PLLC IS NOT LIABLE FOR CHANGES NONTRUCTION METHODS OR ANY CHANGES TO PL BY CONTRACTOR OR BY OTHERS, DRAWINGS ARE P

CLEARWATER - LH
CATION:
NORTH CAROLINA

mattamyHoMES

DJECT NO.: **21902779** 

2190277

DATE: **01/10/2022** 


MATTAMY HOMES

T 310000

**TMB** 

GENERAL NOTES

SN1.2

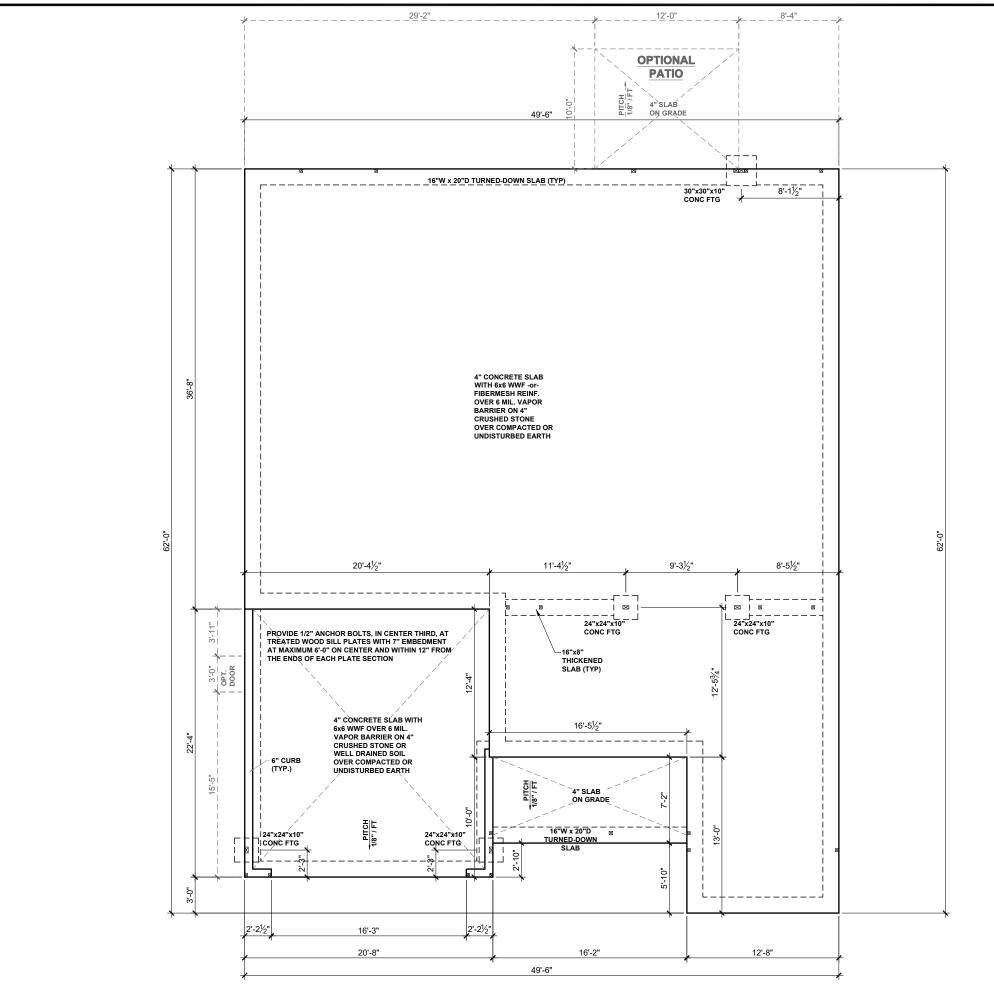

#### **BEAM & POINT LOAD LEGEND**

INTERIOR LOAD BEARING WALL

---- ROOF RAFTER / TRUSS SUPPORT

- · - · - · - DOUBLE RAFTER / DOUBLE JOIST

--- STRUCTURAL BEAM / GIRDER

WINDOW / DOOR HEADER

POINT LOAD TRANSFER

POINT LOAD FROM ABOVE BEARING ON BEAM / GIRDER

MAT CLT ONLY: ALL FOOTINGS TO HAVE CONTINUOUS (2) #4 REBAR.

## CONCRETE SLAB REINFORCING SUBSTITUTION OF SYNTHETIC FIBER MIX IN LIEU OF WWF IN NON STRUCTURAL SLABS:

- NO SUBSTITUTION ALLOWED IN SLABS INSTALLED ON RAISED METAL DECKING NO SUBSTITUTION ALLOWED IN SLABS WITH GRADE BEAMS UNLESS A REBAR MAT IS INSTALLED NO SUBSTITUTION ALLOWED IF ANY SOILS HAVE BEEN FOUND TO BE EXPANSIVE SOILS ON SITE NO SUBSTITUTION ALLOWED FOR SLAB POURS DIRECTLY ON GRADE; A 4" BASE MATERIAL OF CRUSHED STONE OR WELL DRAINING CLEAN SAND IS REQUIRED FOR SUBSTITUTION NO SUBSTITUTION NO SUBSTITUTION ALLOWED FOR ANY SITES WITH A DCP BLOW COUNT OF 10 OR LESS.
- FIBER MIX VOLUMES MUST BE FOLLOWED PER THE MANUFACTURES SPECIFICATIONS

AH B. SMILL

ENERGY OF 

NORTH

**mattamy**HOMES

CLEARWATER

21902779

01/10/2022


MATTAMY HOMES

**TMB** 

SLAB FOUNDATION PLAN

**SLAB FOUNDATION PLAN -FRENCH COUNTRY** 

SCALE: 1/8"=1'-0"

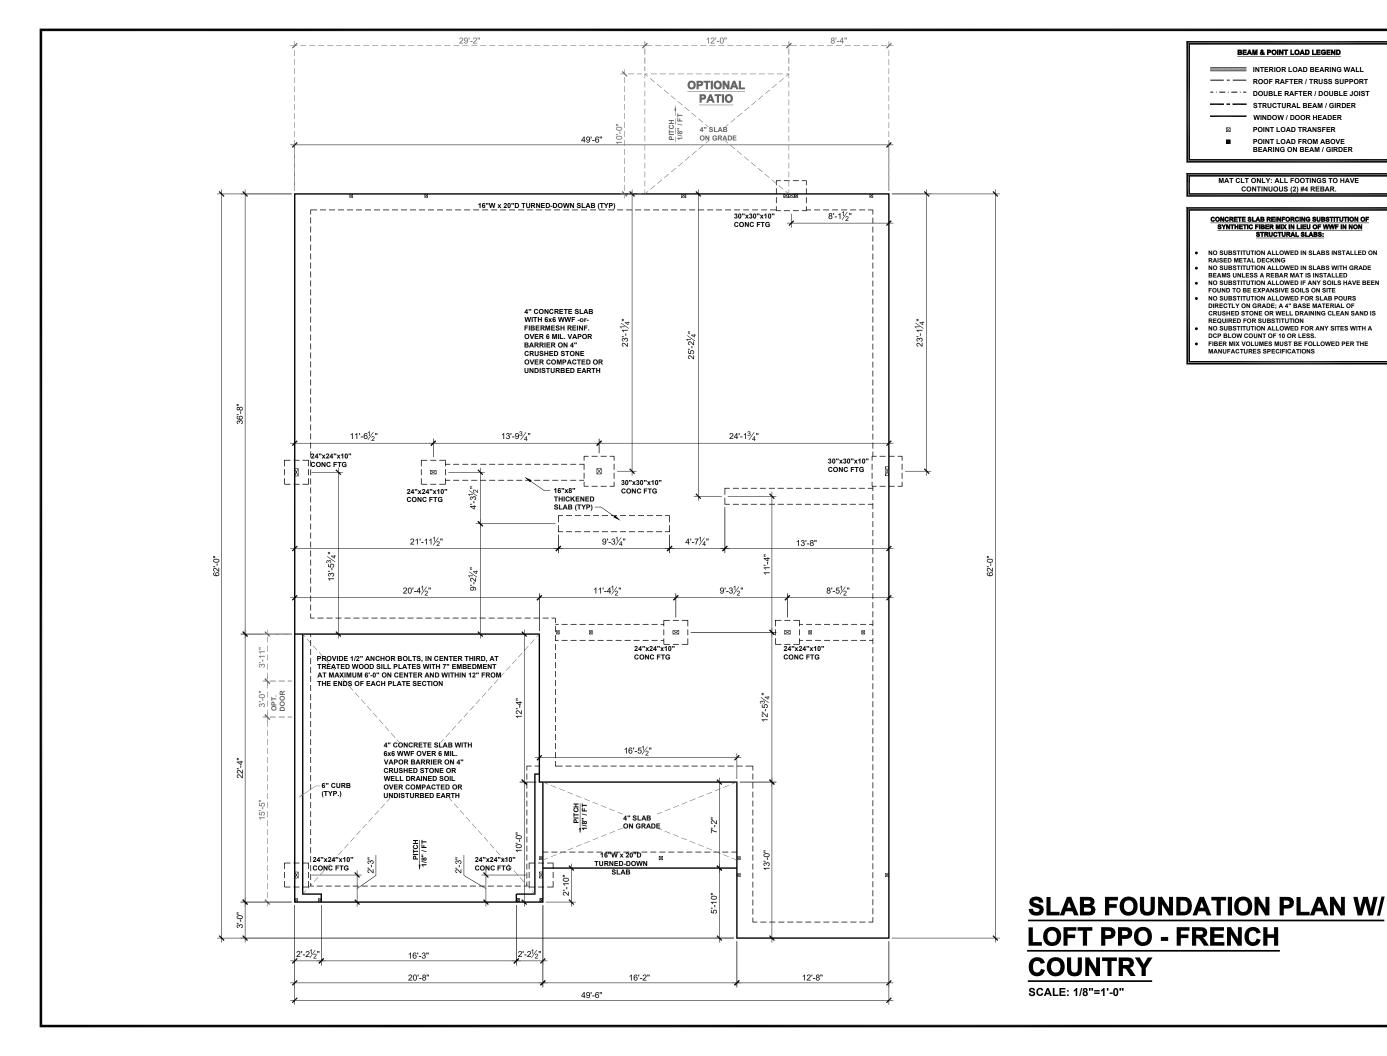

---- ROOF RAFTER / TRUSS SUPPORT

- :- DOUBLE RAFTER / DOUBLE JOIST

STRUCTURAL BEAM / GIRDER

- MANUFACTURES SPECIFICATIONS

#### **BEAM & POINT LOAD LEGEND**

WINDOW / DOOR HEADER


POINT LOAD TRANSFER

POINT LOAD FROM ABOVE BEARING ON BEAM / GIRDER

MAT CLT ONLY: ALL FOOTINGS TO HAVE CONTINUOUS (2) #4 REBAR.

## CONCRETE SLAB REINFORCING SUBSTITUTION OF SYNTHETIC FIBER MIX IN LIEU OF WWF IN NON STRUCTURAL SLABS:

- NO SUBSTITUTION ALLOWED IN SLABS INSTALLED ON RAISED METAL DECKING NO SUBSTITUTION ALLOWED IN SLABS WITH GRADE BEAMS UNLESS A REBAR MAT IS INSTALLED NO SUBSTITUTION ALLOWED IF ANY SOILS HAVE BEEN FOUND TO BE EXPANSIVE SOILS ON SITE NO SUBSTITUTION ALLOWED FOR SLAB POURS DIRECTLY ON GRADE; A 4" BASE MATERIAL OF CRUSHED STONE OR WELL DRAINING CLEAN SAND IS REQUIRED FOR SUBSTITUTION NO SUBSTITUTION NO SUBSTITUTION ALLOWED FOR ANY SITES WITH A DCP BLOW COUNT OF 10 OR LESS. FIBER MIX VOLUMES MUST BE FOLLOWED PER THE
- FIBER MIX VOLUMES MUST BE FOLLOWED PER THE





## **mattamy**HOMES


21902779

01/10/2022


MATTAMY HOMES

**TMB** 


PLAN OPTIONS SLAB FOUNDATION PLANS

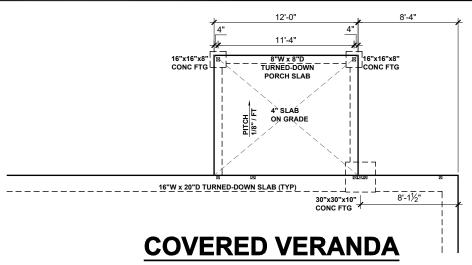

SCALE: 1/8"=1'-0"

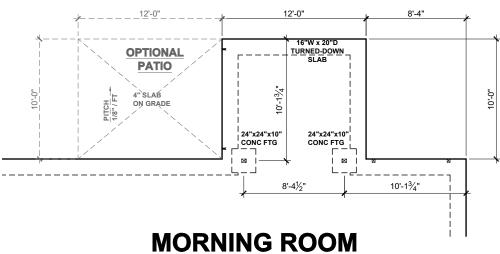

SCALE: 1/8"=1'-0"

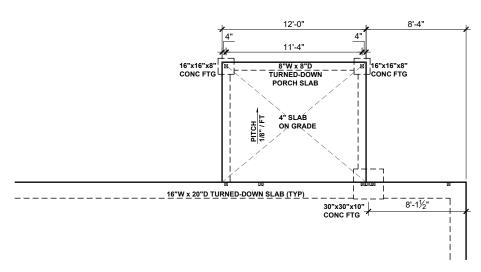

## **SCREENED VERANDA**

SCALE: 1/8"=1'-0"

## **SLAB FOUNDATION PLAN OPTIONS - FRENCH COUNTRY**


SCALE: 1/8"=1'-0"

DOUBLE RAFTER / DOUBLE JOIST

POINT LOAD TRANSFER POINT LOAD FROM ABOVE BEARING ON BEAM / GIRDER

MAT CLT ONLY: ALL FOOTINGS TO HAV CONTINUOUS (2) #4 REBAR.

SEE FULL PLAN FOR ADDITIONAL INFORMATION



P-0961




mattamyHOME

21902779

**MATTAMY HOMES** 

TMB 01/10/2022

PLAN OPTIONS SLAB FOUNDATION PLANS

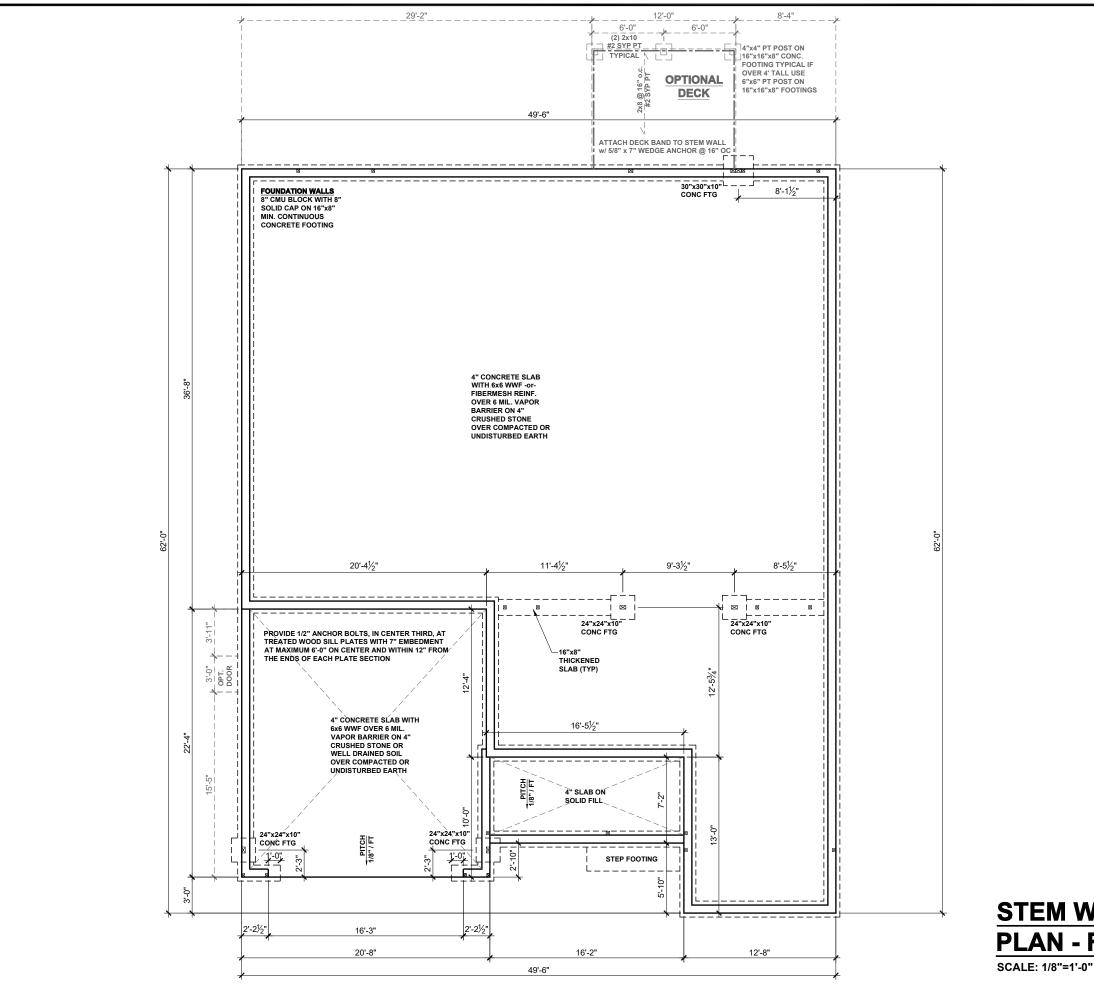

#### BEAM & POINT LOAD LEGEND

---- ROOF RAFTER / TRUSS SUPPORT

- · - · - · DOUBLE RAFTER / DOUBLE JOIST

WINDOW / DOOR HEADER

POINT LOAD TRANSFER

POINT LOAD FROM ABOVE BEARING ON BEAM / GIRDER

MAT CLT ONLY: ALL FOOTINGS TO HAVE CONTINUOUS (2) #4 REBAR.

## CONCRETE SLAB REINFORCING SUBSTITUTION OF SYNTHETIC FIBER MIX IN LIEU OF WWF IN NON STRUCTURAL SLABS:

- NO SUBSTITUTION ALLOWED IN SLABS INSTALLED ON RAISED METAL DECKING NO SUBSTITUTION ALLOWED IN SLABS WITH GRADE BEAMS UNLESS A REBAR MAT IS INSTALLED NO SUBSTITUTION ALLOWED IF ANY SOILS HAVE BEEN FOUND TO BE EXPANSIVE SOILS ON SITE

- FOUND TO BE EXPANSIVE SOILS ON SITE
  NO SUBSTITUTION ALLOWED FOR SLAB POURS
  DIRECTLY ON GRADE; A 4" BASE MATERIAL OF
  CRUSHED STONE OR WELL DRAINING CLEAN SAND IS
  REQUIRED FOR SUBSTITUTION
  NO SUBSTITUTION ALLOWED FOR ANY SITES WITH A
  DCP BLOW COUNT OF 10 OR LESS.
- FIBER MIX VOLUMES MUST BE FOLLOWED PER THE MANUFACTURES SPECIFICATIONS







21902779


01/10/2022

**MATTAMY HOMES** 

**TMB** 

STEM WALL FOUNDATION PLAN

**STEM WALL FOUNDATION PLAN - FRENCH COUNTRY** 

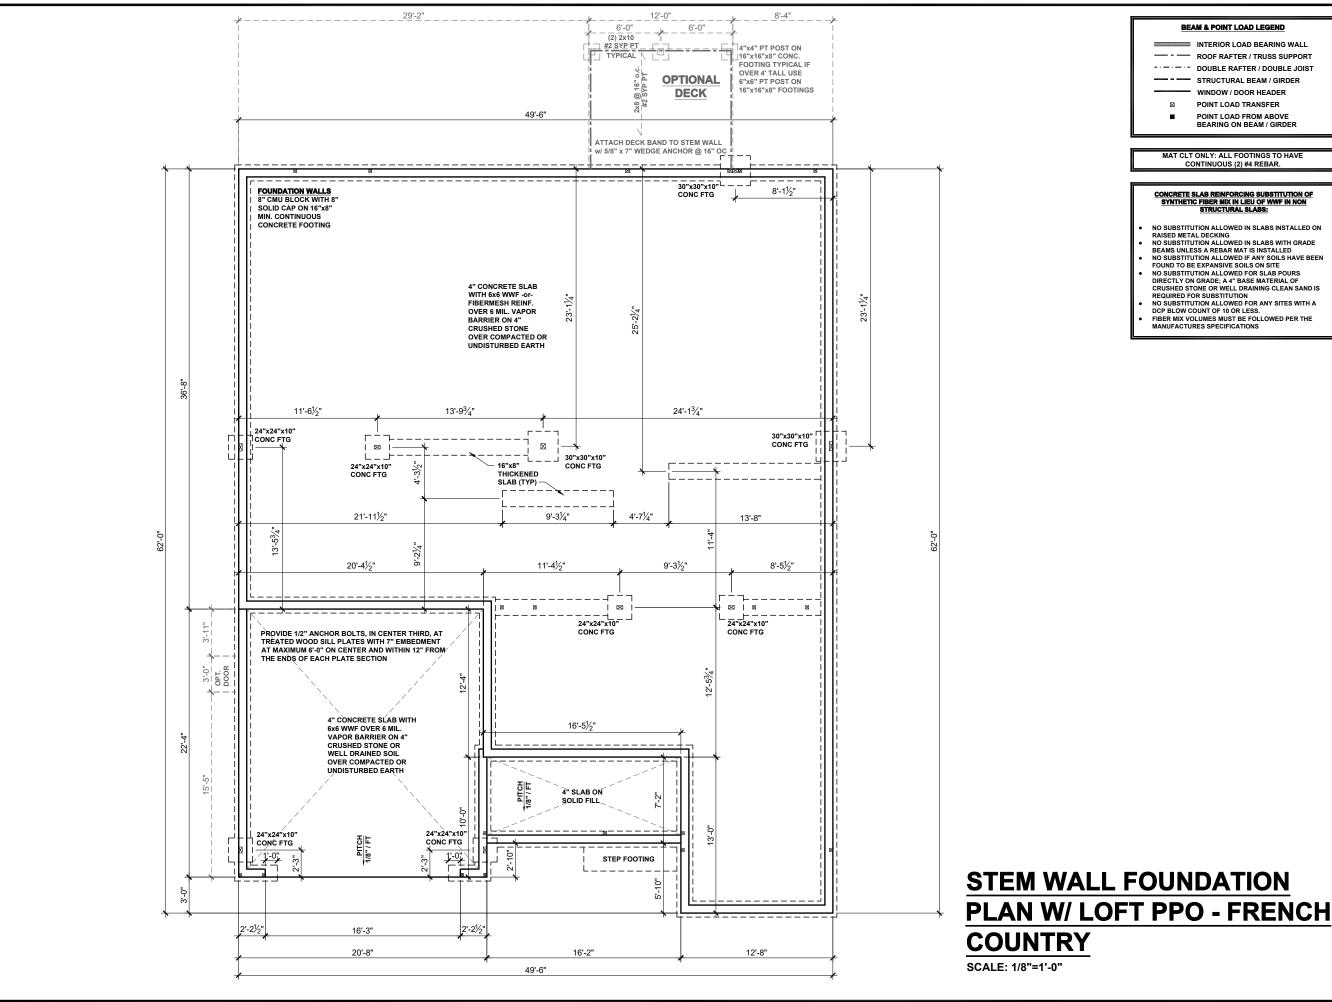





mattamyHOMES

21902779


01/10/2022

MATTAMY HOMES


PLAN OPTIONS

**TMB** 

STEM WALL FDN PLANS

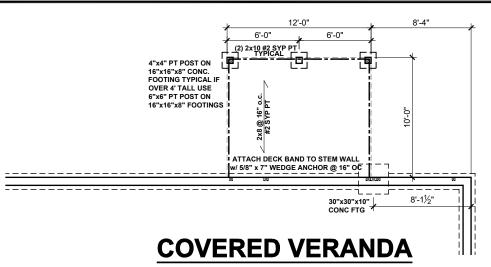


SCALE: 1/8"=1'-0"

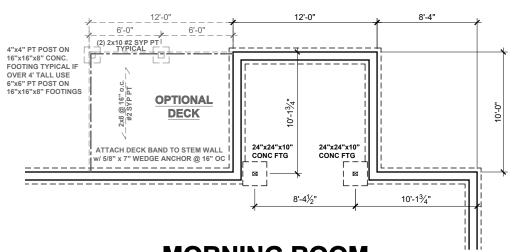

## **MORNING ROOM**

SCALE: 1/8"=1'-0"

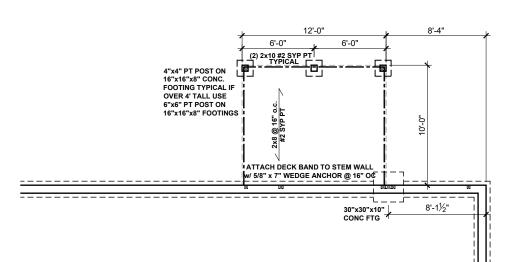


## **SCREENED VERANDA**

SCALE: 1/8"=1'-0"

# STEM WALL FOUNDATION PLAN OPTIONS - FRENCH COUNTRY

SCALE: 1/8"=1'-0"

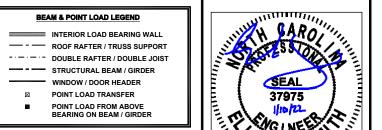

MAT CLT ONLY: ALL FOOTINGS TO HAV

CONTINUOUS (2) #4 REBAR.

SEE FULL PLAN FOR ADDITIONAL INFORMATION

P-0961



CARWATER - LH
RTH CAROLINA

mattamyHOMES

ROJECT NO.: **21902779** 


DATE: **01/10/2022** 

**MATTAMY HOMES** 

PLAN OPTIONS

STEM WALL FDN PLANS

S.22

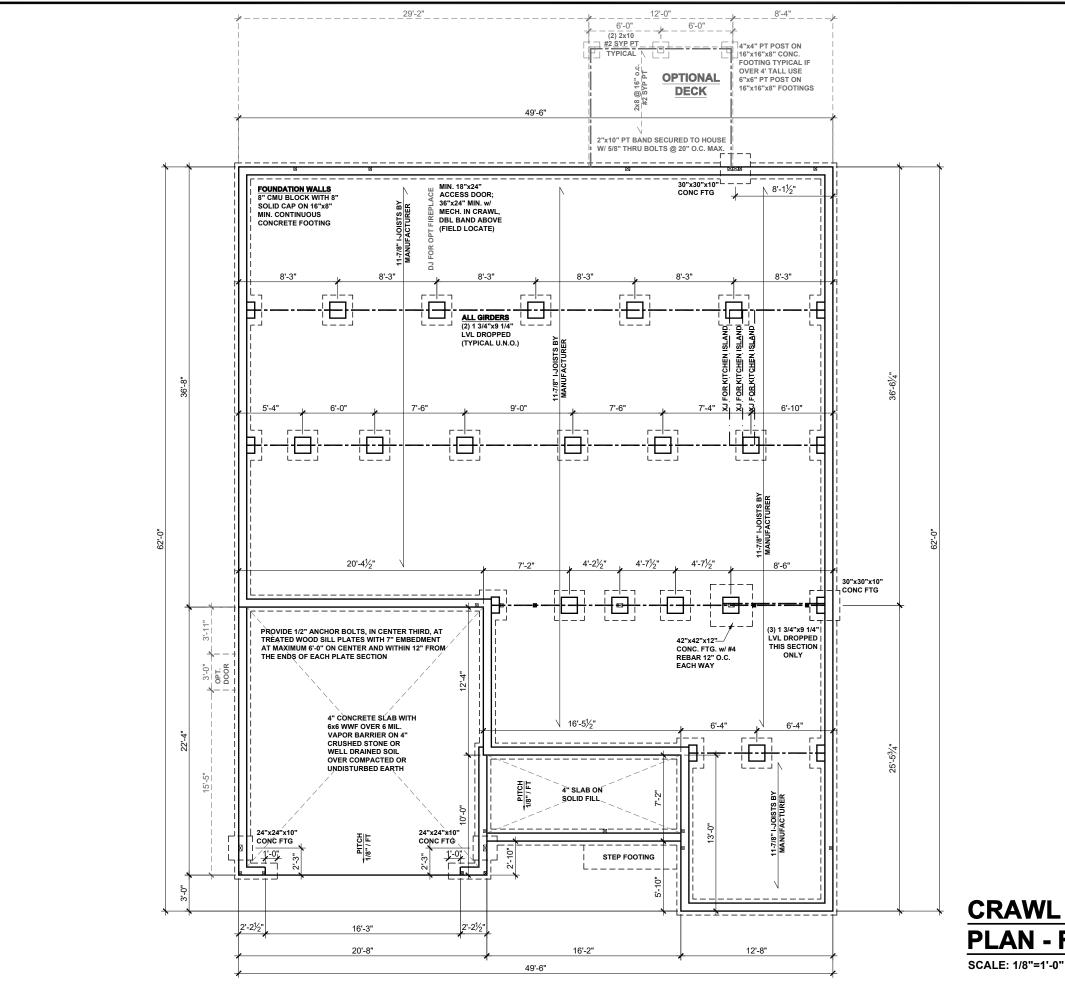

#### BEAM & POINT LOAD LEGEND

---- ROOF RAFTER / TRUSS SUPPORT

- · - · - · DOUBLE RAFTER / DOUBLE JOIST

STRUCTURAL BEAM / GIRDER

WINDOW / DOOR HEADER

POINT LOAD TRANSFER

POINT LOAD FROM ABOVE BEARING ON BEAM / GIRDER

MAT CLT ONLY: ALL FOOTINGS TO HAVE CONTINUOUS (2) #4 REBAR.

I-JOIST SPACING NOT TO EXCEED 19.2" OC IN LOCATIONS WITH TILE FINISH FLOOR

#### **CRAWL SPACE VENTILATION**

THE MINIMUM NET AREA OF VENTILATION OPENINGS SHALL NOT BE LESS THAN 1 SQUARE FOOT FOR EACH 150 SQUARE FEET OF UNDERFLOOR SPACE AREA. AND ONE SUCH OPENING SHALL BE WITHIN 3 FEET OF EACH CORNER OF THE BUILDING.

EXCEPTION: THE TOTAL AREA OF VENTILATION MAY BE REDUCED TO 1/1500 OF THE UNDERFLOOR AREA WHERE THE GROUND SURFACE IS TREATED WITH AN APPROVED VAPOR RETARDER MATERIAL AND THE REQUIRED OPENINGS ARE PLACED SO AS TO PROVIDE CROSS-VENTILATION.

2338 SQUARE FEET OF TOTAL CRAWL SPACE / 150 =

15.5 SQUARE FEET OF NET-FREE VENTILATION REQUIRED

FLOOR FRAMING TO BE 11 7/8" DEEP TJI 210 SERIES OR EQUAL, 19.2" OC MAXIMUM SPACING UNLESS OTHERWISE NOTED ON THE PLANS

\*\*REFER TO I-JOIST EQUIVALENCE CHART ON I-JOIST DETAIL SHEET FOR SUBSTITUTION OF MANUFACTURER SERIES

#### **FOUNDATION STRUCTURAL NOTES:**

1. CONCRETE BLOCK PIER SIZE SHALL BE:


#### HOLLOW MASONRY

UP TO 5'-0" HIGH UP TO 9'-0" HIGH UP TO 48" HIGH

WITH 30" x 30" x 10" CONCRETE FOOTING, UNO.

EXTRA JOISTS UNDER ALL NON LOAD BEARING WALLS THAT RUN AT LEAST 30% OF THE JOIST SPAN

8"x16" PIERS AT FOUNDATION WALL SUPPORTING DROPPED GIRDER TO HAVE A 30"x10"x8" FOOTING PROJECTION FROM THE MAIN WALL FOOTING.



P-0961



**mattamy**HOMES

21902779


HOMES

01/10/2022 **TMB** 

> CRAWL SPACE FOUNDATION PLAN

> > **S.30**

**CRAWL SPACE FOUNDATION PLAN - FRENCH COUNTRY** 

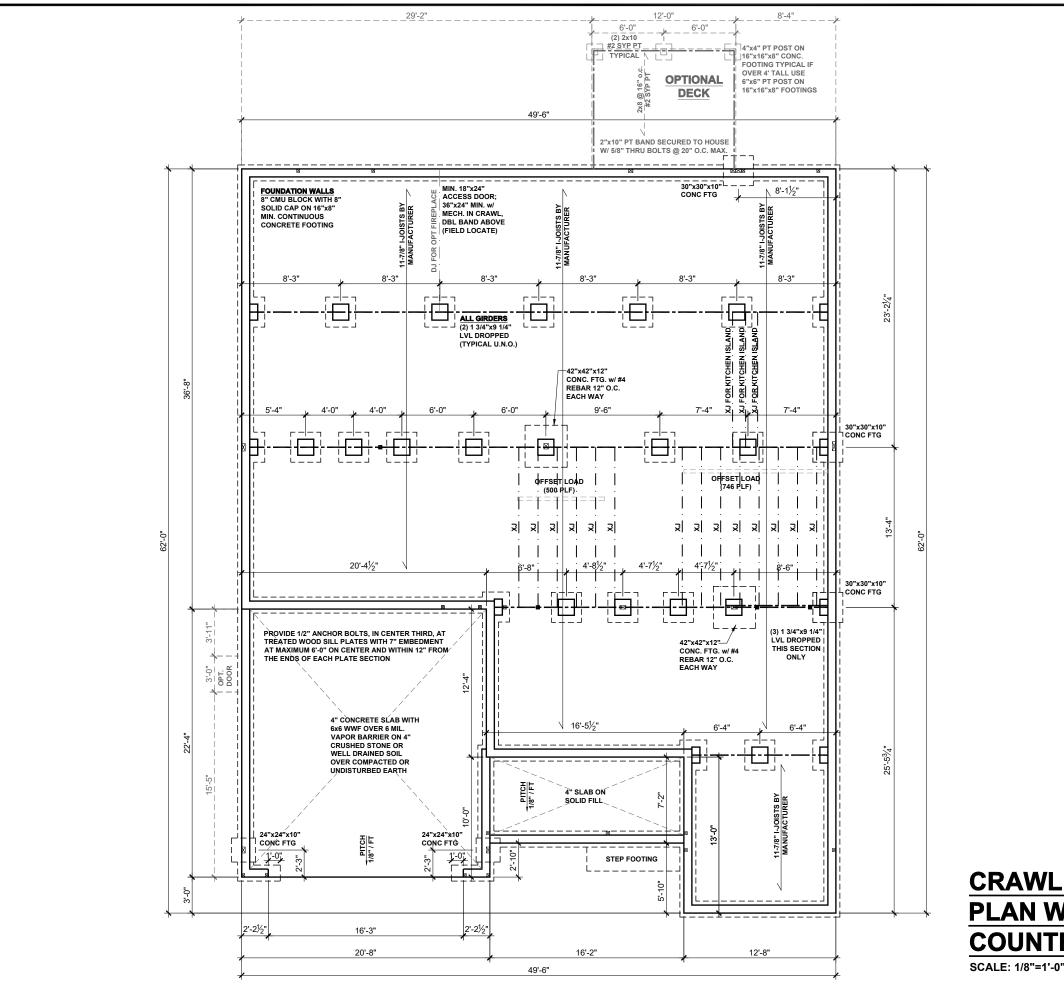

#### **BEAM & POINT LOAD LEGEND**

---- ROOF RAFTER / TRUSS SUPPORT

- · - DOUBLE RAFTER / DOUBLE JOIST

STRUCTURAL BEAM / GIRDER

WINDOW / DOOR HEADER

POINT LOAD TRANSFER

POINT LOAD FROM ABOVE BEARING ON BEAM / GIRDER

MAT CLT ONLY: ALL FOOTINGS TO HAV CONTINUOUS (2) #4 REBAR.

I-JOIST SPACING NOT TO EXCEED 19.2" OC IN LOCATIONS WITH TILE FINISH FLOOR

#### CRAWL SPACE VENTILATION

THE MINIMUM NET AREA OF VENTILATION OPENINGS SHALL NOT BE LESS THAN 1 SQUARE FOOT FOR EACH 150 SQUARE FEET OF UNDERFLOOR SPACE AREA. AND ONE SUCH OPENING SHALL BE WITHIN 3

EXCEPTION: THE TOTAL AREA OF VENTILATION MAY BE REDUCED TO 1/1500 OF THE UNDERFLOOR AREA WHERE THE GROUND SURFACE IS TREATED WITH AN APPROVED VAPOR RETARDER MATERIAL AND THE REQUIRED OPENINGS ARE PLACED SO AS TO PROVIDE CROSS-VENTILATION.

2338 SQUARE FEET OF TOTAL CRAWL SPACE /

FLOOR FRAMING TO BE 11 7/8" DEEP TJI 210 SERIES OR EQUAL. 19.2" OC MAXIMUM SPACING UNLESS OTHERWISE NOTED ON THE PLANS

\*\*REFER TO I-JOIST EQUIVALENCE CHART ON I-JOIST DETAIL SHEET FOR SUBSTITUTION OF MANUFACTURER SERIES

#### **FOUNDATION STRUCTURAL NOTES:**

1. CONCRETE BLOCK PIER SIZE SHALL BE


#### HOLLOW MASONRY

UP TO 5'-0" HIGH UP TO 9'-0" HIGH UP TO 48" HIGH

WITH 30" x 30" x 10" CONCRETE FOOTING, UNO

EXTRA JOISTS UNDER ALL NON LOAD BEARING WALLS THAT RUN AT LEAST 30% OF THE JOIST SPAN

8"x16" PIERS AT FOUNDATION WALL SUPPORTING DROPPED GIRDER TO HAVE A 30"x10"x8" FOOTING PROJECTION FROM THE MAIN WALL FOOTING.



P-0961



**mattamy**HOMES


21902779

01/10/2022


**TMB** 

PLAN OPTIONS CRAWL SPACE FDN PLANS

**CRAWL SPACE FOUNDATION PLAN W/ LOFT PPO - FRENCH COUNTRY** 

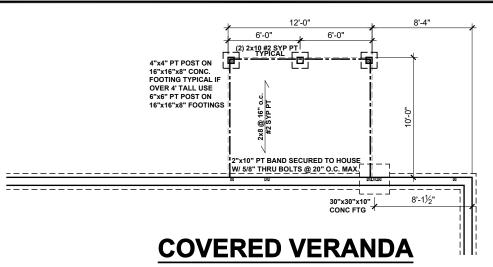


SCALE: 1/8"=1'-0"

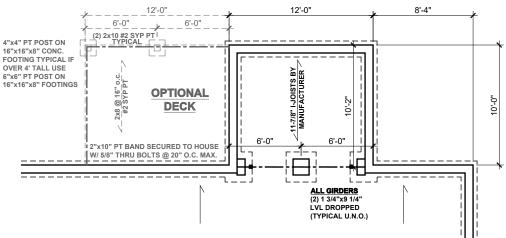

## **MORNING ROOM**

SCALE: 1/8"=1'-0"

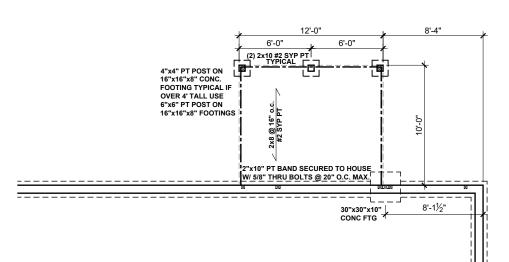

## **SCREENED VERANDA**

SCALE: 1/8"=1'-0"

## **CRAWL SPACE FOUNDATION PLAN OPTIONS - FRENCH COUNTRY**

SCALE: 1/8"=1'-0"

#### BEAM & POINT LOAD LEGEND

- · - · - · - DOUBLE RAFTER / DOUBLE JOIST WINDOW / DOOR HEADER

POINT LOAD TRANSFER POINT LOAD FROM ABOVE BEARING ON BEAM / GIRDER

MAT CLT ONLY: ALL FOOTINGS TO HAV CONTINUOUS (2) #4 REBAR.


#### CRAWL SPACE VENTILATION: MORNING ROOM

THE MINIMUM NET AREA OF VENTULATION OPENINGS SHALL NOT BE LESS THAN 1 SQUARE FOOT FOR EACH 150 SQUARE FEET OF UNDERFLOOR SPACE AREA, AND ONE SUCH OPENING SHALL BE WITHIN : FEET OF EACH CORNER OF THE BUILDING.

EXCEPTION: THE TOTAL AREA OF VENTILATION MAY BE REDUCED TO 1/1500 OF THE UNDERFLOOR AREA WHERE THE GROUND SURFACE IS TREATED WITH AN APPROVED VAPOR RETARDER MATERIAL AND THE REQUIRED OPENINGS ARE PLACED SO AS TO

120 SQUARE FEET OF TOTAL CRAWL SPACE / 150 =

SEE FULL PLAN FOR ADDITIONAL INFORMATION



P-0961

onsul



mattamyHOMES

21902779

01/10/2022


MATTAMY HOMES

**TMB** 

PLAN OPTIONS CRAWL SPACE FDN PLANS

**S.32** 



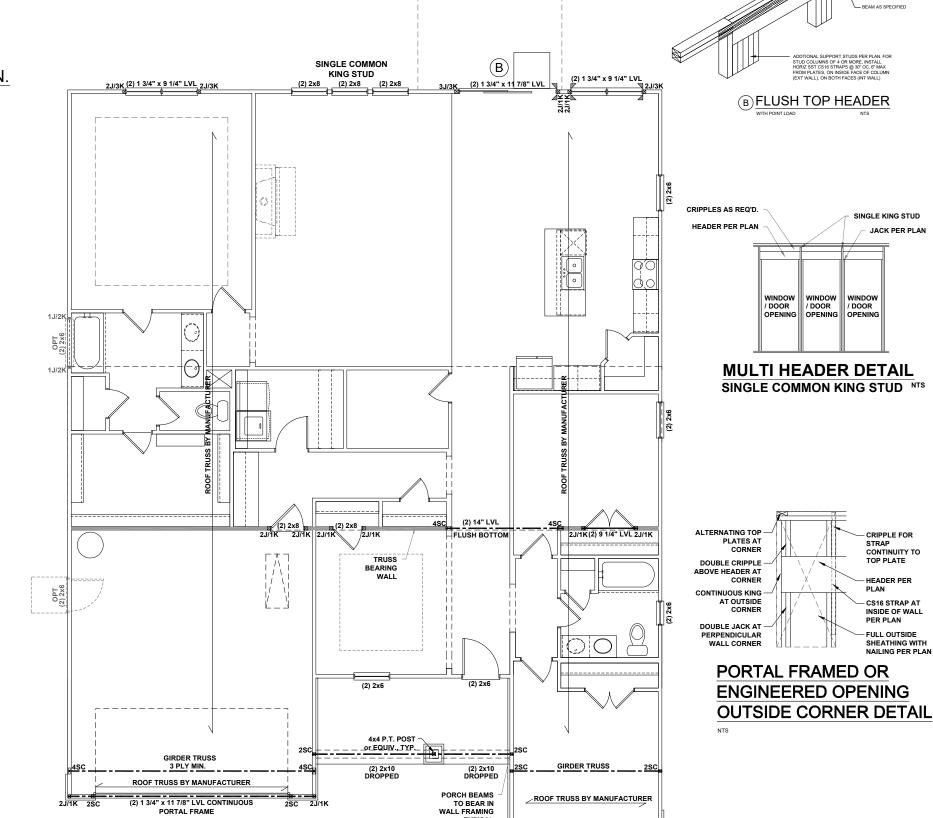

ROOF TRUSS BY MANUFACTURER

(2) 1 3/4" x 11 7/8" LVL CONTINUOUS

#### **BEAM & POINT LOAD LEGEND**

DOUBLE RAFTER / DOUBLE JOIST POINT LOAD TRANSFER

POINT LOAD FROM ABOVE BEARING ON BEAM / GIRDER

## STRUCTURAL FRAMING NOTES - (SEE GENERAL NOTES SHEET FOR ADDITIONAL REQUIREMENTS.)

- $\mbox{w/}\mbox{ MIN}$  (1) JACK AND (1) KING EACH END, UNO.
- EXTERIOR WALL OPENINGS OVER 3' TO HAVE MULTIPLE KING STUDS AS NOTED ON PLAN.
- ALL NON-BEARING HEADERS TO BE (2) 2x4 (1) J /
- PROVIDE CONTINUOUS BLOCKING THROUGH STRUCTURE FOR ALL POINT LOADS.
- ALL HANGERS AND CONNECTORS SPECIFIED ARE TO BE SIMPSON STRONG-TIE OR EQUIVALENT.
- ALL BEAMS SPECIFIED ARE MINIMUM SIZES ONLY LARGER MEMBERS MAY SUBSTITUTED AS NEEDED FOR EASE OF CONSTRUCTION. MINIMUM BEAM SUPPORT IS (1) 2x4 STUD.
- ALL EXTERIOR WALLS TO BE FULLY SHEATHED WITH 7/16" OSB.
- FRONT PORCH COLUMNS TO BE MIN 4x4 PT ATTACHED AT TOP AND BOTTOM USING SIMPSON (OR EQUIV) COLUMN BASE OR SST A24 BRACKETS. TRIM OUT PER BUILDER.
- PORCH COLUMNS TO BE MIN 4x4 PT ATTACHED AT BOTTOM USING SIMPSON (OR EQUIV) ABA44 AND AT TOP USING CS 16 STRAPPING (12" MIN) TO
- WHEN A 4-PLY LVL IS USED, ATTACH WITH (1) 1/2" 1-1/2" MIN FROM ENDS. ALTERNATE ATTACHMEN EQUIVALENT METHOD MAY BE USED, SUCH AS SDW OR TRUSSLOK SCREWS (SEE MANUFACTURER'S SPECIFICATIONS)
- . FOR STUD COLUMNS OF 4 OR MORE, INSTALL SST CS16 STRAPS @ 30" OC, 6" MAX FROM PLATES, ON INSIDE FACE OF COLUMN (EXTERIOR WALL), ON BOTH FACES OF COLUMN (INTERIOR WALL).

ALL FLUSH BEAMS TO BE DIRECTLY SUPPORTED BY (2) 2X\_STUDS UNLESS OTHERWISE NOTED. STUD
COLUMNS TO BE SUPPORTED BY SOLID BLOCKING TO
FOUNDATION OR TO BEARING COMPONENT BELOW.



P-0961

onsul



21902779

01/10/2022

MATTAMY HOMES

**TMB** 

FIRST FLOOR **CEILING FRAMING PLAN** 

FIRST FLOOR CEILING FRAMING **PLAN - FRENCH COUNTRY** 

SCALE: 1/8"=1'-0"


JACK PER PLAN

CRIPPLE FOR STRAP CONTINUITY TO TOP PLATE

HEADER PER

CS16 STRAP AT

PER PLAN

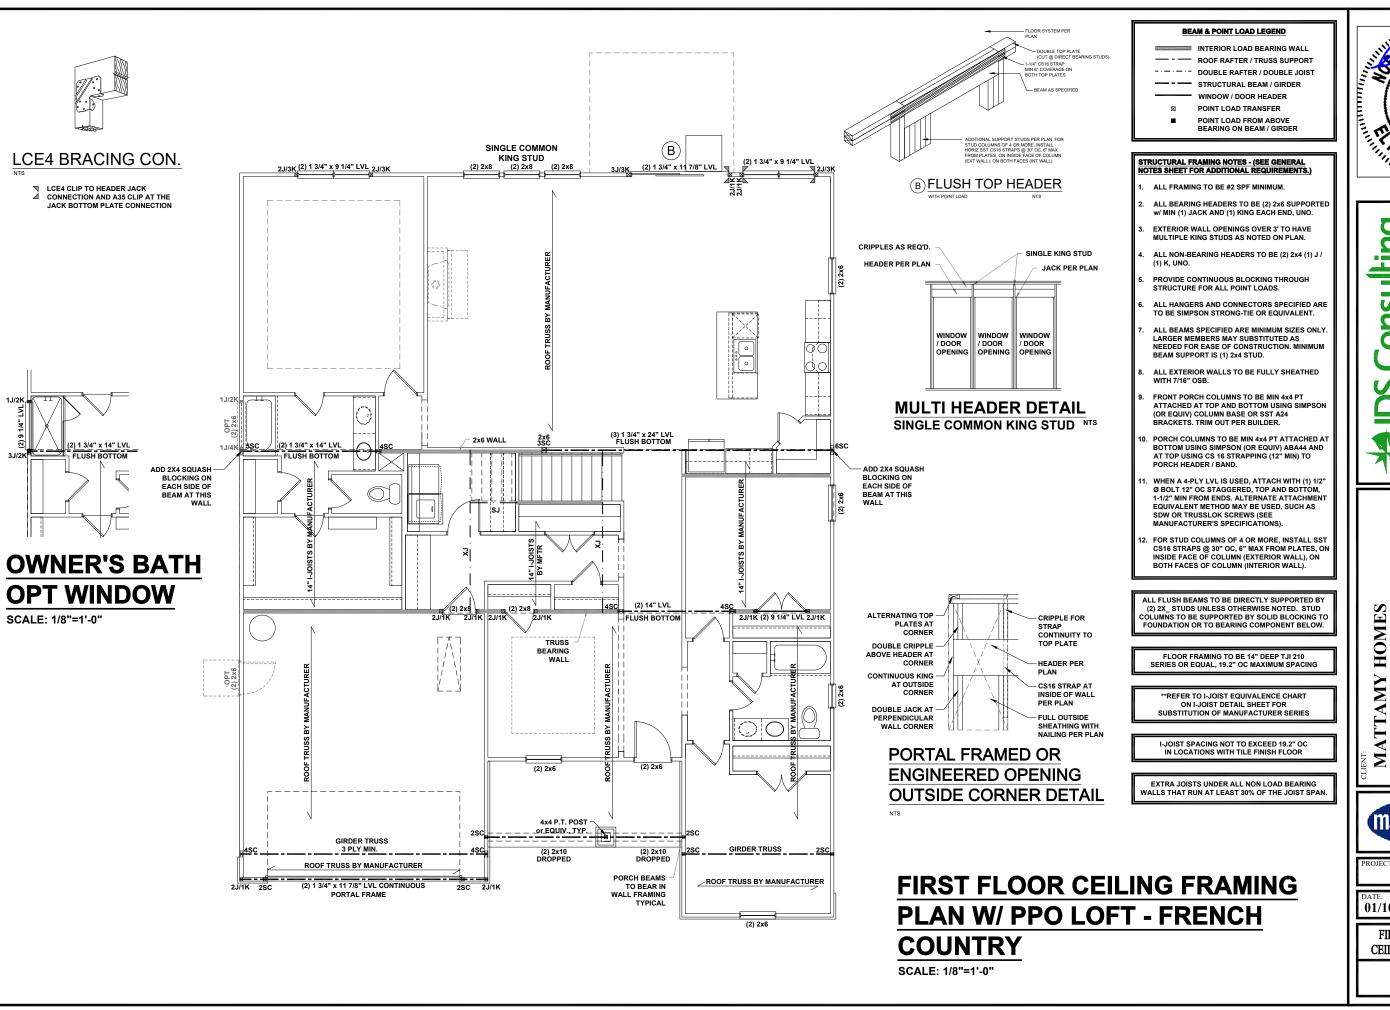

SEAL 37975

P-0961

ONSULPHOSE SURVEYING - ENERGY ST. RALEIGH, NC 27617 919-480.1075 F. WWW.JDSCONSULTING.NET

SUBING PLLC; 8600 TO JERSEY CT, RALEIGH, NC
NFO@JDSCONSULTING.NET; WWW.JDSCONSUL
NP TIABLE FOR CHANGES MAD

JDS Consulting PLLC IS NOT CONSTRUCTION METHODS BY CONTRACTOR OR BY CONTRACTOR OF THE LOT NUMBER, PROPER SHEET. DIMENSIONS SHARE

H CAROLINA

CATION: NORTE

mv lowes




ROJECT NO.: **21902779** 

DATE: **01/10/2022** 


TMB

FIRST FLOOR OPTIONS CEILING FRAMING PLANS

**S1.1** 

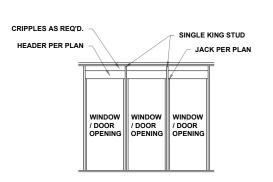


#### **MULTI HEADER DETAIL** SINGLE COMMON KING STUD NTS

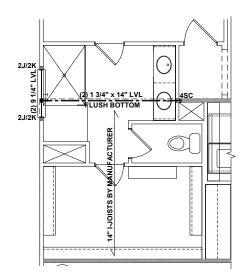

## **SUPER SHOWER**


SCALE: 1/8"=1'-0"

## 4x4 P.T. POST -I US28-2 LUS28-2 PORCH BEAM HANGER TO REAR SLIDER HEADER WITH CONCEALED PORCH BEAM ROOF TRUSS TO BEAR IN (B) (2) 1 3/4" x 9 1/4" LVL (2) 2x8 (2) 1 3/4" x 11 7/8" LVL SINGLE COMMON **COVERED VERANDA** SCALE: 1/8"=1'-0"

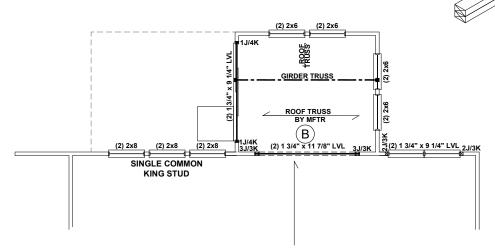

## **MORNING ROOM**

SCALE: 1/8"=1'-0"

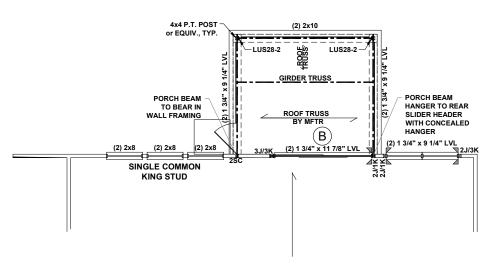

## **SCREENED VERANDA**

SCALE: 1/8"=1'-0"

#### BEAM & POINT LOAD LEGEND

--- ROOF RAFTER / TRUSS SUPPORT DOUBLE RAFTER / DOUBLE JOIST WINDOW / DOOR HEADER

POINT LOAD TRANSFER POINT LOAD FROM ABOVE BEARING ON BEAM / GIRDER

## STRUCTURAL FRAMING NOTES - (SEE GENERAL NOTES SHEET FOR ADDITIONAL REQUIREMENTS.)

- ALL BEARING HEADERS TO BE (2) 2x6 SUPPORTED w/ MIN (1) JACK AND (1) KING EACH END, UNO.
- ALL NON-BEARING HEADERS TO BE (2) 2x4 (1) J /
- PROVIDE CONTINUOUS BLOCKING THROUGH
- ALL HANGERS AND CONNECTORS SPECIFIED ARE
- ALL BEAMS SPECIFIED ARE MINIMUM SIZES ONLY LARGER MEMBERS MAY SUBSTITUTED AS
  NEEDED FOR EASE OF CONSTRUCTION. MINIMUM
- FRONT PORCH COLUMNS TO BE MIN 4x4 PT ATTACHED AT TOP AND BOTTOM USING SIMPSON (OR EQUIV) COLUMN BASE OR SST A24
- PORCH COLUMNS TO BE MIN 4x4 PT ATTACHED AT BOTTOM USING SIMPSON (OR EQUIV) ABA44 AND AT TOP USING CS 16 STRAPPING (12" MIN) TO
- WHEN A 4-PLY LVL IS USED. ATTACH WITH (1) 1/2" 1-1/2" MIN FROM ENDS. ALTERNATE ATTACHMEN EQUIVALENT METHOD MAY BE USED, SUCH AS SDW OR TRUSSLOK SCREWS (SEE MANUFACTURER'S SPECIFICATIONS)

SEE FULL PLAN FOR ADDITIONAL INFORMATION

- MULTIPLE KING STUDS AS NOTED ON PLAN.
- STRUCTURE FOR ALL POINT LOADS.
- TO BE SIMPSON STRONG-TIE OR EQUIVALENT.
- BEAM SUPPORT IS (1) 2x4 STUD.
- ALL EXTERIOR WALLS TO BE FULLY SHEATHED WITH 7/16" OSB.
- BRACKETS. TRIM OUT PER BUILDER.
- PORCH HEADER / BAND.
- . FOR STUD COLUMNS OF 4 OR MORE, INSTALL SST CS16 STRAPS @ 30" OC, 6" MAX FROM PLATES, ON INSIDE FACE OF COLUMN (EXTERIOR WALL), ON BOTH FACES OF COLUMN (INTERIOR WALL).



Onsul



21902779

01/10/2022

MATTAMY HOMES

**TMB** 

FIRST FLOOR OPTIONS **CEILING FRAMING PLANS** 

FIRST FLOOR CEILING FRAMING PLAN OPTIONS -**FRENCH COUNTRY** 

ALTERNATE

INSTALLATION

- FLOOR SYSTEM PER PLAN

1-1/4" CS16 STRAF

STUD COLUMNS OF 4 OR MORE, INSTALL HORIZ SST CS16 STRAPS @ 30" OC, 6" MAX FROM PLATES, ON INSIDE FACE OF COLUMN (EXT WALL), ON BOTH FACES (INT WALL)

LCE4 BRACING CON.

STANDARD

INSTALLATION

LOWER BRACING CON. NTS A35 CLIP WITH SD9112 SCREWS

SCALE: 1/8"=1'-0"

LCE4 CLIP TO HEADER JACK CONNECTION AND A35 CLIP AT THE


JACK BOTTOM PLATE CONNECTION CS16 STRAP FROM STUD, CROSS HEADER, TO WALL TOP PLATE, 36"

SIMPSON HTT4 HOLD DOWN FOR ATTACHMENT TO CONCRETE OR MSTA18 STRAP FOR WOOD

**(B) FLUSH TOP HEADER** 

MIN 6" COVERAGE ON BOTH TOP PLATES

- DOUBLE TOP PLATE (CUT @ DIRECT BEARING STUDS)

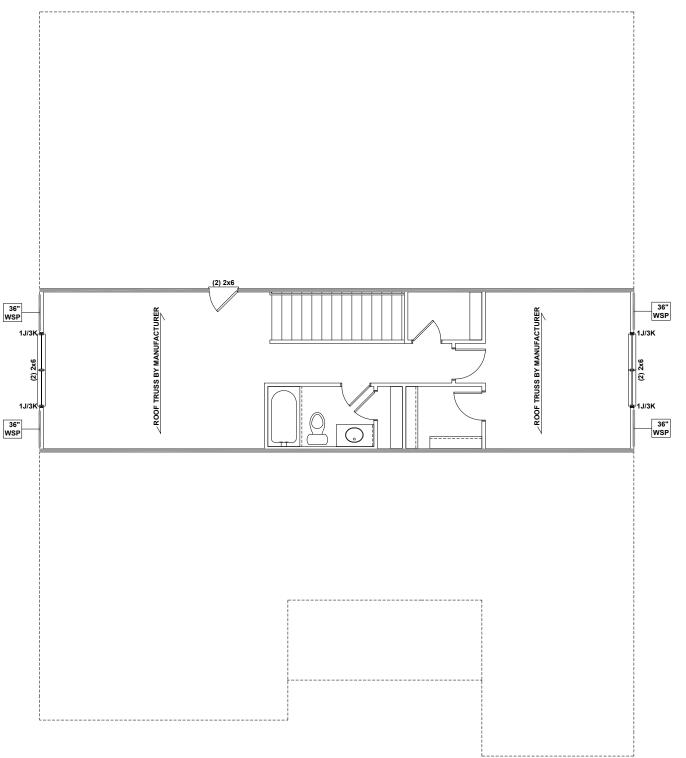

#### BEAM & POINT LOAD LEGEND

---- ROOF RAFTER / TRUSS SUPPORT

- · - · - · DOUBLE RAFTER / DOUBLE JOIST

--- STRUCTURAL BEAM / GIRDER

WINDOW / DOOR HEADER

POINT LOAD TRANSFER

POINT LOAD FROM ABOVE BEARING ON BEAM / GIRDER

## STRUCTURAL FRAMING NOTES - (SEE GENERAL NOTES SHEET FOR ADDITIONAL REQUIREMENTS.)

- ALL BEARING HEADERS TO BE (2) 2x6 SUPPORTED  $\mbox{w/}\mbox{ MIN}$  (1) JACK AND (1) KING EACH END, UNO.
- EXTERIOR WALL OPENINGS OVER 3' TO HAVE MULTIPLE KING STUDS AS NOTED ON PLAN.
- ALL NON-BEARING HEADERS TO BE (2) 2x4 (1) J /
- PROVIDE CONTINUOUS BLOCKING THROUGH STRUCTURE FOR ALL POINT LOADS.
- ALL HANGERS AND CONNECTORS SPECIFIED ARE TO BE SIMPSON STRONG-TIE OR EQUIVALENT.
- ALL BEAMS SPECIFIED ARE MINIMUM SIZES ONLY. LARGER MEMBERS MAY SUBSTITUTED AS NEEDED FOR EASE OF CONSTRUCTION. MINIMUM BEAM SUPPORT IS (1) 2x4 STUD.
- ALL EXTERIOR WALLS TO BE FULLY SHEATHED WITH 7/16" OSB.
- FRONT PORCH COLUMNS TO BE MIN 4x4 PT ATTACHED AT TOP AND BOTTOM USING SIMPSON (OR EQUIV) COLUMN BASE OR SST A24 BRACKETS. TRIM OUT PER BUILDER.
- PORCH COLUMNS TO BE MIN 4x4 PT ATTACHED AT BOTTOM USING SIMPSON (OR EQUIV) ABA44 AND AT TOP USING CS 16 STRAPPING (12" MIN) TO PORCH HEADER / BAND.
- WHEN A 4-PLY LVL IS USED, ATTACH WITH (1) 1/2" 1-1/2" MIN FROM ENDS. ALTERNATE ATTACHMENT EQUIVALENT METHOD MAY BE USED, SUCH AS SDW OR TRUSSLOK SCREWS (SEE MANUFACTURER'S SPECIFICATIONS)
- 12. FOR STUD COLUMNS OF 4 OR MORE, INSTALL SST CS16 STRAPS @ 30" OC, 6" MAX FROM PLATES, ON INSIDE FACE OF COLUMN (EXTERIOR WALL), ON BOTH FACES OF COLUMN (INTERIOR WALL).







21902779

01/10/2022

MATTAMY HOMES


SECOND FLOOR

**TMB** 

CEILING FRAMING PLAN

**PPO - UPPER FLOOR CEILING** FRAMING PLAN - FRENCH COUNTRY

SCALE: 1/8"=1'-0"

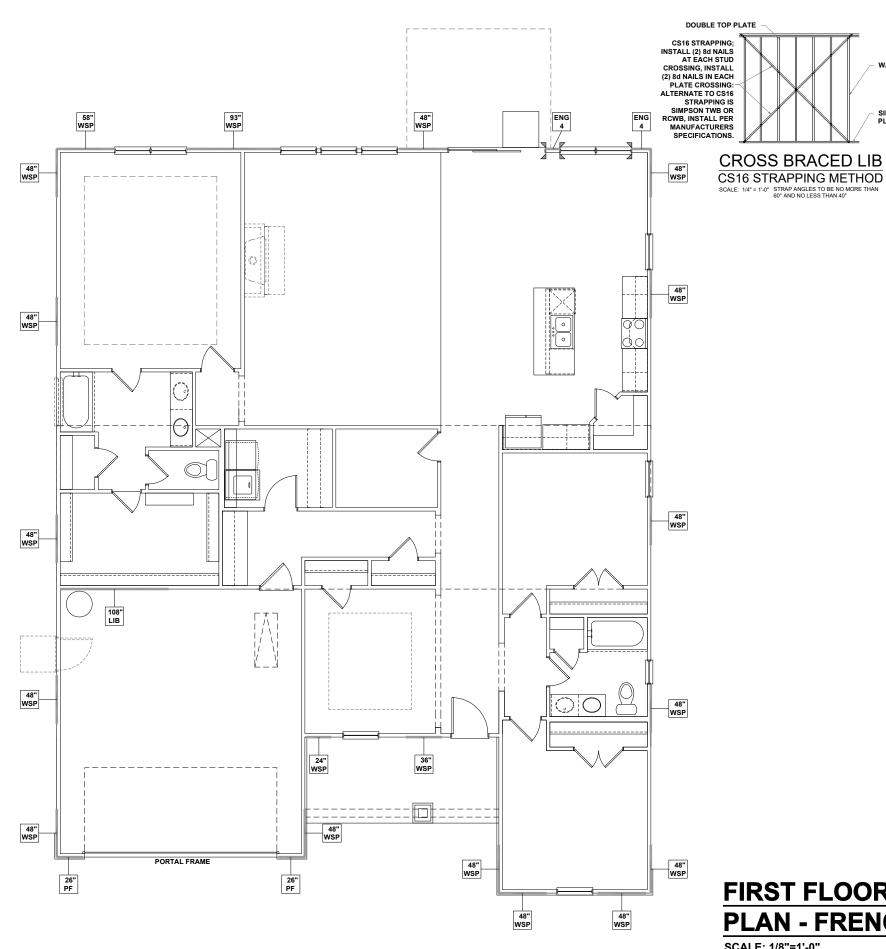

#### WALL BRACING REQUIREMENTS

- MINIMUM PANEL WIDTH IS 24" - FIGURES BASED ON THE CONTINUOUS SHEATHING METHOD USING THE RECTANGLE CIRCUMSCRIBED AROUND THE FLOOR PLAN OR PORTION OF THE FLOOR PLAN. IF NO RECTANGLE IS NOTED. THE RECTANGLE.

PANELS MAY SHIFT UP TO 36" EITHER DIRECTION FOR EASE OF CONSTRUCTION (NAILING & BLOCK REQUIREMENTS STILL APPLY). FOR ADDITIONAL WALL BRACING INFORMATION, REFER TO WALL BRACING DETAIL SHEET(S). SCHEMATIC BELOW INDICATES HOW SIDES OF RECTANGLE ARE TO BE INTERPRETED IN BRACING CHART WHEN APPLIED TO STRUCTURE:



CS16 STRAP FROM STUD, CROSS HEADER, TO WALL TOP PLATE, 36" LONG MINIMUM

SIMPSON MSTA15 HOLD DOWN CAPACITY OF 970 POUNDS PER ANCHOR WITH (12) 10d NAILS. STRAP TO BE LOCATED AT EDGE OF BRACED WALL PANEL. (CS16 STRAPPING MAY BE SUBSTITUTED w/ SIMILAR LENGTH AND NAILING PATTERN.) USE HTT4 FOR ATTACHMENT TO CONCRETE.

- NUMERICAL LENGTH SCALED LENGTH 24"-OF WALL PANEL
AT LOCATION — PANEL TYPE

#### **ENGINEERED WALL SCHEDULE**

ENG1: CONTINUOUSLY SHEATH WITH 7/16" OSB ATTACHED WITH 8d NAILS @ 6" OC EDGE AND 12" OC FIELD. FULLY BLOCKED AT ALL PANEL

ENG2: CONTINUOUSLY SHEATH WITH 7/16" OSB WITH 10d NAILS @ 3" OC EDGE AND 3" OC FIELD. FULLY BLOCKED AT ALL PANEL EDGES

ENG3: CONTINUOUSLY SHEATH 7/16" OSB ATTACHED

BOTH SIDES WITH 8d NAILS @ 4" OC EDGE

AND 8" OC FIELD. FULLY BLOCKED AT ALL

ENG4: CONTINUOUSLY SHEATH 7/16" OSB ATTACHED WITH 8d NAILS @ 4" OC EDGE AND 8" OC FIELD. FULLY BLOCKED AT ALL PANEL EDGES.


#### WALL BRACING NOTE:

WALLS WITH PROVIDED LENGTH LISTED AS "N/A" DO NOT MEET THE REQUIREMENTS OF PRESCRIPTIVE WALL BRACING FOUND IN THE NCRC. THESE WALLS HAVE BEEN ENGINEERED BASED ON DESIGN
GUIDELINES ESTABLISHED IN ASCE-07 AND THE NDS: WIND & SEISMIC PROVISIONS SUPPLEMENT.

#### **WALL BRACING: RECTANGLE 1** PROVIDED LENGTH LENGTH FRONT 19.75 FT. 17.5 FT. 8.5 FT. 20.0 FT. RIGHT REAR 17.5 FT. N/A LEFT

## FIRST FLOOR WALL BRACING **PLAN - FRENCH COUNTRY**

SCALE: 1/8"=1'-0"



P-0961



**mattamy**HOMES

21902779


01/10/2022


HOMES

**TMB** 

FIRST FLOOR WALL BRACING PLAN

## **OPT COVERED & SCREENED** PORCH/SUNROOM



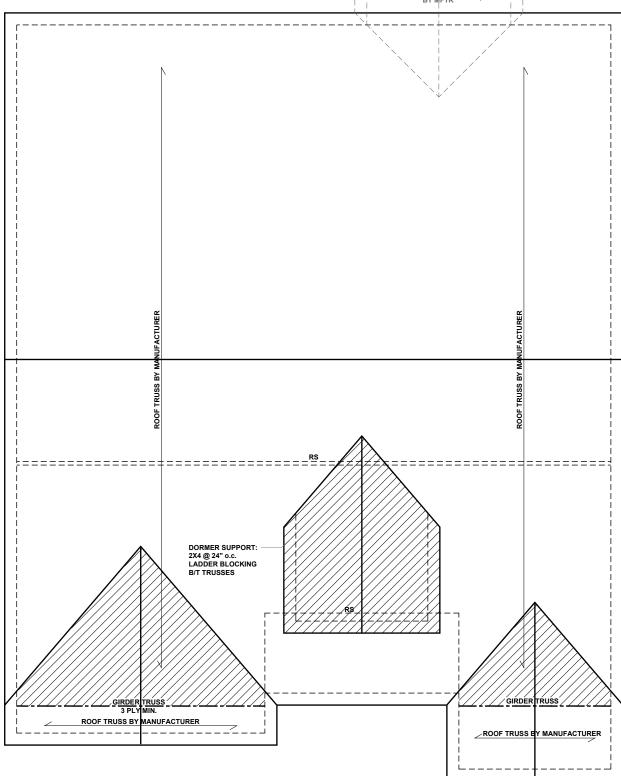

r======================== **ATTIC VENTILATION: REAR COVERED OPTS** 

THE TOTAL NET-FREE VENTILATION AREA SHALL NOT BE LESS THAN 1/150 OF THE AREA OF THE ATTIC SPACE TO BE VENTILATED. THE TOTAL VENTILATION MAY BE REDUCED TO 1/300 PROVIDED AT LEAST 50% BUT NOT MORE THAN 80% OF THE REQUIRED
VENTILATION BE LOCATED IN THE UPPER PORTION OF THE AREA TO BE VENTILATED, OR AT LEAST 3' ABOVE THE SOFFIT VENTILATION INTAKE.

140 \_ SQUARE FEET OF TOTAL ATTIC / 150 =

\_.93\_ \_ SQUARE FEET OF NET-FREE VENTILATION

L-----

#### **BEAM & POINT LOAD LEGEND**

INTERIOR LOAD BEARING WALL ---- ROOF RAFTER / TRUSS SUPPORT - · - · - · - DOUBLE RAFTER / DOUBLE JOIST

--- STRUCTURAL BEAM / GIRDER WINDOW / DOOR HEADER POINT LOAD TRANSFER

POINT LOAD FROM ABOVE BEARING ON BEAM / GIRDER

#### TRUSSED ROOF - STRUCTURAL NOTES

PROVIDE CONTINUOUS BLOCKING THROUGH STRUCTURE FOR ALL POINT LOADS.

DENOTES OVER-FRAMED AREA

MINIMUM 7/16" OSB ROOF SHEATHING

- TRUSS LAYOUT AND PLACEMENT BY MANUFACTURER TO COINCIDE WITH THE SUPPORT LOCATIONS SHOWN. TRUSS PROFILES SHALL BE SEALED BY THE TRUSS MANUFACTURER. TRUSS PLANS TO BE COORDINATED WITH THE SEALED STRUCTURAL DRAWINGS. INSTALLATION SHALL BE IN ACCORDANCE WITH THE MANUFACTURER'S
- MANUFACTURER TO PROVIDE REQUIRED UPLIFT CONNECTION.
- PROVIDE H2.5A (MINIMUM) OR EQUIVALENT AT EACH TRUSS-TO-TOP PLATE CONNECTION AT OVER-FRAMED AREAS, UNLESS NOTED
- UPLIFT CONNECTION TO BE CARRIED THROUGH TO FLOOR SYSTEM.

#### **ATTIC VENTILATION**

THE TOTAL NET-FREE VENTILATION AREA SHALL NOT SPACE TO BE VENTILATED. THE TOTAL VENTILATION MAY BE REDUCED TO 1/300 PROVIDED AT LEAST 50% BUT NOT MORE THAN 80% OF THE REQUIRED VENTILATION BE LOCATED IN THE UPPER PORTION OF ABOVE THE SOFFIT VENTILATION INTAKE.

3138 SQUARE FEET OF TOTAL ATTIC / 150 =

20.9 SQUARE FEET OF NET-FREE VENTILATION REQUIRED

## TRUSS UPLIFT CONNECTORS: EXPOSURE B, 115 MPH, ANY PITCH, 24" O.C. MAX ROOF TRUSS SPACING

TRUSSES SHALL BE ATTACHED TO SUPPORT WALL FOR UPLIFT RESISTANCE. CONTINUOUS OSB WALL SHEATHING BELOW PROVIDES CONTINUOUS UPLIFT RESISTANCE TO FOUNDATION. ALL TRUSSES KNEEWALLS, OR BEAMS SHALL BE ATTACHED TO

ROOF SPAN IS MEASURED HORIZONTALLY BETWEEN FURTHEST SUPPORT POINTS.

CONNECTOR NAILING PER TABLE 602.3(1) NCRBC 2018 EDITION

**OVER 28**'

(1) SIMPSON H2.5A HURRICANE CLIP TO DBL TOP PLATE OR BEAM

OR (1) SIMPSON H3 CLIP TO SINGLE 2x4 PLATE

## **ROOF FRAMING PLAN -FRENCH COUNTRY**

SCALE: 1/8"=1'-0"



WAH B. SAN P-0961

AH B.



**mattamy**HOMES

CLEARWATER

21902779

01/10/2022

HOMES

**TMB** 

ROOF FRAMING PLAN

# **OPT COVERED & SCREENED** PORCH/SUNROOM GIRDER TRUSS DORMER SUPPORT: 2X4 @ 24" o.c. LADDER BLOCKING B/T TRUSSES ROOF TRUSS BY MANUFACTURER ROOF TRUSS BY MANUFACTURER

ATTIC VENTILATION: REAR COVERED OPTS

THE TOTAL NET-FREE VENTILATION AREA SHALL NOT BE LESS THAN 1/150 OF THE AREA OF THE ATTIC SPACE TO BE VENTILATED. THE TOTAL VENTILATION MAY BE REDUCED TO 1/300 PROVIDED AT LEAST 50% BUT NOT MORE THAN 80% OF THE REQUIRED VENTILATION BE LOCATED IN THE UPPER PORTION OF THE AREA TO BE VENTILATED, OR AT LEAST 3' ABOVE THE SOFFIT VENTILATION INTAKE.

\_\_ 140 \_\_ SQUARE FEET OF TOTAL ATTIC / 150 =

\_\_93 \_\_ SQUARE FEET OF NET-FREE VENTILATION REQUIRED

#### BEAM & POINT LOAD LEGEND

INTERIOR LOAD BEARING WALL
ROOF RAFTER / TRUSS SUPPORT
DOUBLE RAFTER / DOUBLE JOIST

WINDOW / DOOR HEADER
POINT LOAD TRANSFER

POINT LOAD FROM ABOVE BEARING ON BEAM / GIRDER

#### TRUSSED ROOF - STRUCTURAL NOTES

PROVIDE CONTINUOUS BLOCKING THROUGH
 STRUCTURE FOR ALL POINT LOADS.

2.

DENOTES OVER-FRAMED AREA

- 3. MINIMUM 7/16" OSB ROOF SHEATHIN
- TRUSS LAYOUT AND PLACEMENT BY MANUFACTURER TO COINCIDE WITH THE SUPPORT LOCATIONS SHOWN. TRUSS PROFILES SHALL BE SEALED BY THE TRUSS MANUFACTURER. TRUSS PLANS TO BE COORDINATED WITH THE SEALED STRUCTURAL DRAWINGS. INSTALLATION SHALL BE IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.
- 5. MANUFACTURER TO PROVIDE REQUIRED UPLIFT CONNECTION.
- PROVIDE H2.5A (MINIMUM) OR EQUIVALENT AT EACH TRUSS-TO-TOP PLATE CONNECTION AT OVER-FRAMED AREAS, UNLESS NOTED OTHERWISE.
- 7. UPLIFT CONNECTION TO BE CARRIED THROUGH TO FLOOR SYSTEM.

#### **ATTIC VENTILATION**

THE TOTAL NET-FREE VENTILATION AREA SHALL NOT BE LESS THAN 1/150 OF THE AREA OF THE ATTIC SPACE TO BE VENTILATED. THE TOTAL VENTILATION MAY BE REDUCED TO 1/300 PROVIDED AT LEAST 50% BUT NOT MORE THAN 80% OF THE REQUIRED VENTILATION BE LOCATED IN THE UPPER PORTION OF THE AREA TO BE VENTILATED, OR AT LEAST 3' ABOVE THE SOFFIT VENTILATION INTAKE.

3138 SQUARE FEET OF TOTAL ATTIC / 150 =

20.9 SQUARE FEET OF NET-FREE VENTILATION REQUIRED

## TRUSS UPLIFT CONNECTORS: EXPOSURE B, 115 MPH, ANY PITCH, 24" O.C. MAX ROOF TRUSS SPACING

TRUSSES SHALL BE ATTACHED TO SUPPORT WALL FOR UPLIFT RESISTANCE. CONTINUOUS OSB WALL SHEATHING BELOW PROVIDES CONTINUOUS UPLIFT RESISTANCE TO FOUNDATION. ALL TRUSSES SUPPORTED BY INTERMEDIATE SUPPORT WALLS, KNEEWALLS, OR BEAMS SHALL BE ATTACHED TO SUPPORTING MEMBER PER SCHEDULE:

ROOF SPAN IS MEASURED HORIZONTALLY BETWEEN FURTHEST SUPPORT POINTS.

ROOF PL

CONNECTOR
NAILING PER TABLE 602.3(1)
NCRBC 2018 EDITION


OVER 28'

(1) SIMPSON H2.5A HURRICANE CLIP TO DBL TOP PLATE OR BEAM

OR (1) SIMPSON H3 CLIP TO SINGLE 2x4 PLATE

# ROOF FRAMING PLAN WITH LOFT PPO - FRENCH COUNTRY

SCALE: 1/8"=1'-0"



P-0961



JDS Consulting PLLC IS CONSTRUCTION MET BY CONTRACTOR OR THE LOT NUMBER, PRET. DIMENSIONS

2x34 PAPER, OR AS

ROLINA

ORTHC

mattamyHOMES

DJECT NO.: **21902779** 

DATE: **01/10/2022** 

HOMES

TMB

PLAN OPTIONS ROOF FRAMING PLANS

**S7.1**