

SOUTHEASTERN SOIL & ENVIRONMENTAL ASSOC., INC.

PROPOSED SUBSURFACE WASTE DISPOSAL SYSTEM DETAIL SHEET

SUBDIVISION: Liberty Meadow

LOT Ⓢ → 46

GRAV
INITIAL SYSTEM: APPROVED 25% REDUCTION

GRAV
REPAIR Approved 25% Reduction

DISTRIBUTION: D-Box

DISTRIBUTION SERIAL

BENCHMARK: 100.0

LOCATION BC IRON 69/70

NO. BEDROOMS: 3

LTAR 0.4 gpd/ft²

LINE	FLAG COLOR	ELEVATION	LENGTH
<u>1</u>	<u>W</u>	<u>102.50</u>	<u>75</u>
<u>2</u>	<u>D</u>	<u>101.91</u>	<u>75</u>
<u>3</u>	<u>W</u>	<u>101.59</u>	<u>75</u>
			<u>225</u>

<u>4</u>	<u>D</u>	<u>101.17</u>	<u>70</u>
<u>5</u>	<u>W</u>	<u>100.93</u>	<u>70</u>
<u>6</u>	<u>D</u>	<u>100.33</u>	<u>70</u>
<u>7</u>	<u>W</u>	<u>100.00</u>	<u>50</u>
			<u>260 AVAIL</u>

BY B.C. Raynor

DATE 12/21/2021

TYPICAL PROFILE

THERE SHALL BE NO GRADING,

0-20 LS vfri gran

CUTTING, LOGGING OR OTHER SOIL

20-36 SCL firm SBK

DISTURBANCE IN SEPTIC AREA

CR 2 336"


HEALTH DEPARTMENT USE ONLY.

DESIGNS DO NOT GUARANTEE FUNCTIONALITY

Liberty Meadows

Lot 68 & 69

39 40

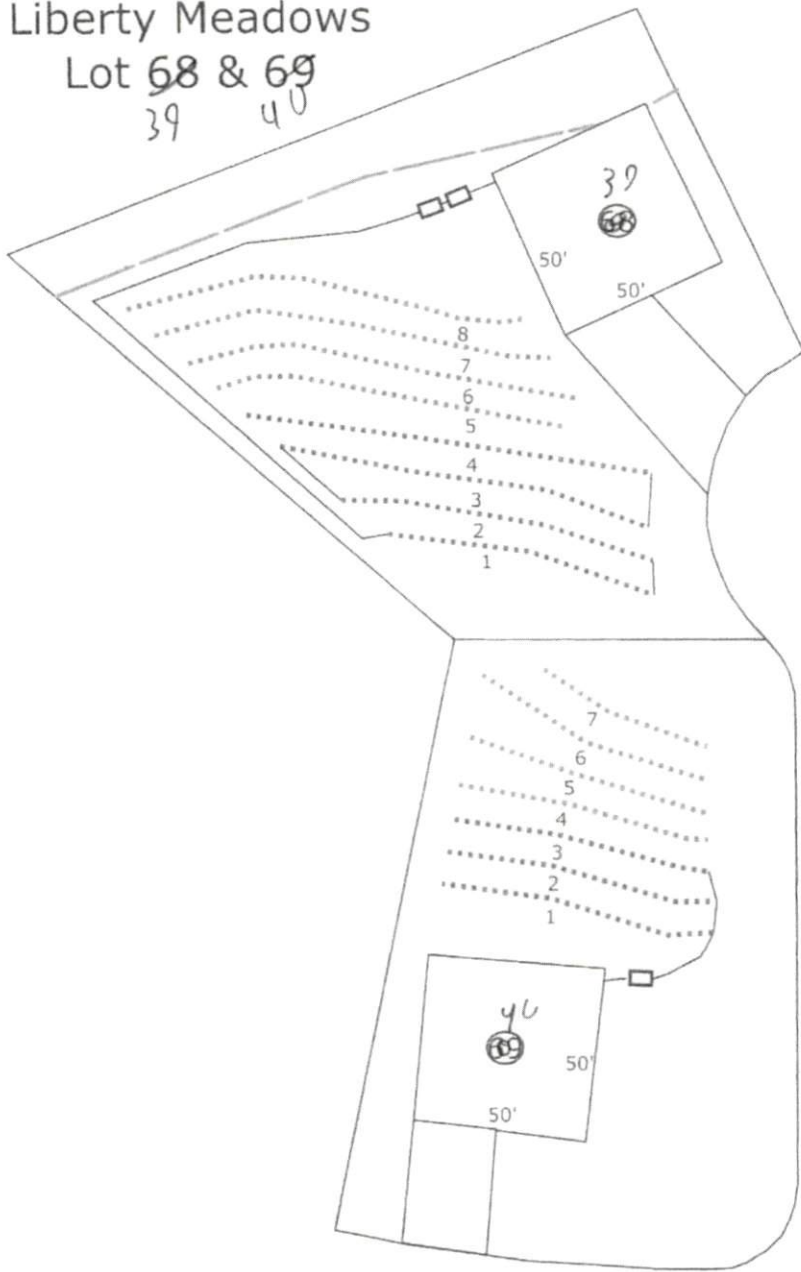

39' 50' x 50'

40'

40'

Road
Hundred ft

40' unlimited width
50' deep

Solumm US