


TC Property Solutions INC
 Harnett County
 1076 NC 55 W Coats, NC
 3-Bedroom septic proposal

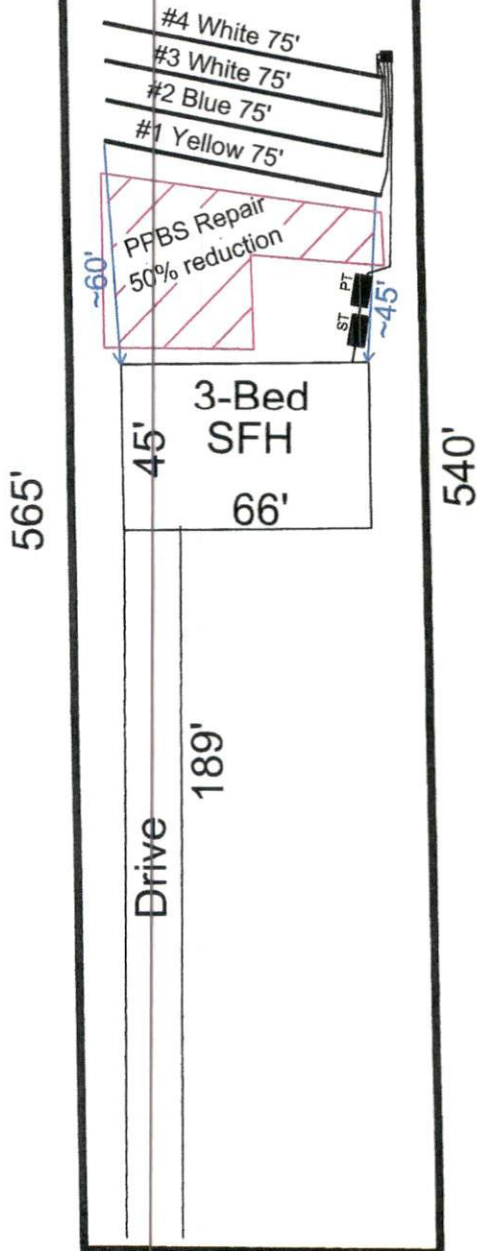

System: Pump to D-Box or manifold
 Lines: 1-4 (300')
 0.3 LTAR
 15" Max Trench Bottom
 Accepted Status
 Repair: PPBS - 50% reduction
 ~3,000 sq. feet
 0.3 LTAR
 200' Linear feet of T&J Panel Block

*1000 Gallon Septic Tank to be installed.

*Do Not Cut, Fill, or Alter Drainfield or Repair Area
 *Comply with all setbacks
 *Contact local health dept. and/or Alex Adams prior to or during installation with any questions or concerns.

*Not a Survey
 (sketched from plot plan supplied by property owner)

NC Hwy 55 W

GRAPHIC SCALE
 1" = 50'



Adams
 Soil Consulting
 919-414-6761
 Job #1697