



PROVIDE HANDRAIL WHEN REQUIRED BY CODE


SCALE: 1/2" = 1'-0"


2" TRIM CAP —— ABOVE 8" TRIM J'.- 0" PLATE

STONE CAP -APPLIED STONE (TYP.)

ENTRY DOOR

SCALE: 1" = 1'-0"



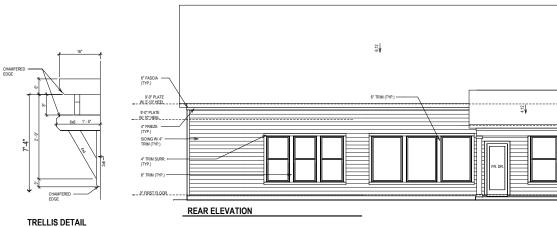

---8" SQ. WOOD POST W/ 4" TRIM @ TOP & BOTTOM (TYP.) SOUTH **B326-A** ELV-1 BLAKESTONE RALEIGH

9'-0" PLATE _____WL2:10".HEEL____

SIDING W/ 4* TRIM (TYP.) 4" TRIM SURR. (TYP.)

6" FASCIA 4º FRIEZE _ 92 ± 02 PLATE_ _ David Weekley Homes


Fot:

Proj. No.: 3277 Job No.: 0050


SERENITY 65' 57 SERENDIPITY DR FUQUAY VARINA, NC

Scale:1/8"=1'-0" Rev: 4/28/22 EB

BR/JP/MW Date: 03/09/2021

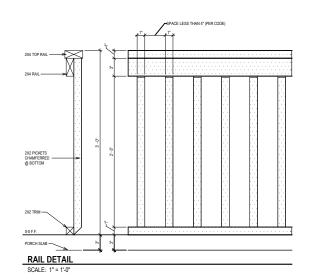



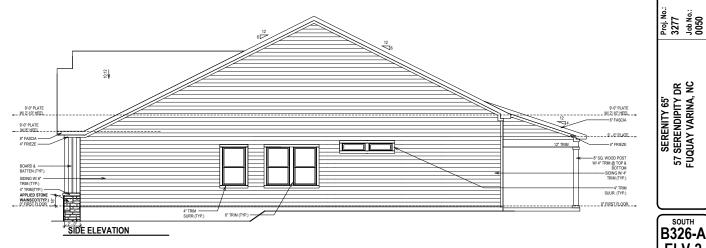



David Weekley Homes

20

Scale:1/8"=1'-0" Rev: 4/28/22 EB

BR/JP/MW Date: 03/09/2021

Block: Lot:

GENERAL STRUCTURAL NOTES

MONOLITHIC SLAB FOUNDATION PLAN

ROOF FRAMING PLAN

BRACED WALL DETAILS SD-2 HOLD DOWN DETAILS

SD-3 BRACED WALL NOTES & DETAILS SD-4 PORTAL FRAME DETAILS

MISCELLANEOUS FRAMING DETAILS

MISCELLANEOUS FRAMING DETAILS SD-6

SD-7 MONOLITHIC SLAB FOUNDATION DETAILS

SD-8 NOT LISED SD-9

SD-10 NOT LISED

SD-11

SD-12 ADVANCED FRAMING DETAILS & NOTES



1900 AM DRIVE, SUITE 201, QUAKERTOWN, PA 18951 www.kse-eng.com (215) 804-4449

B326 BLAKESTONE SERENITY, LOT #50

RALEIGH, NORTH CAROLINA

THESE DRAWINGS ARE TO BE USED IN CONJUNCTION WITH AND COORDINATED WITH THE ARCHITECTURAL, CIVIL, MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS. THIS COORDINATION IS NOT THE RESPONSIBILITY OF THE RECOMMUNICATION TO THE CONTROL OF THE MEDICAL PROPERTY OF THE WORLD AND THE CONTROL OF THE CONTR TO THE COMMENCEMENT OF ANY WORK. THE ENGINEER IS NOT RESPONSIBLE TO RANT PLAN ERRORS, OMISSIONS, OR MISMITERPRETATIONS UNDETECTED AND NOT REPORTED TO THE COMMENCE TO CONSTRUCTION. ALL CONSTRUCTION MUST BE IN ACCORDANCE TO THE INFORMATION FOUND IN TRISE DOCUMENTS.

DESIGN SPECIFICATIONS:

DESIGN BUILDING CODE (REFERRED TO HEREIN AS 'THE BUILDING CODE'):

• 2018 NORTH CAROLINA RESIDENTIAL CODE, WALL BRACING PER INTERNATIONAL RESIDENTIAL CODE 2015 EDITION.

** ROOF = 20 PSF (LOAD DURATION FACTOR=1.25)

**UNINHABITABLE ATTICS WITH LIMITED STORAGE = 20 PSF (WHERE SPECIFIED ON PLANS)

HABITABLE ATTICS AND ATTICS SERVED WITH FIXED STAIRS = 30 PSF

- FLOOR (SLEEPING AREAS) = 30 PSF
- DECK/BALCONY = 40 PSF STAIRS = 40 PSF

DESIGN DEAD LOADS:

- *ROOF TRUSS = 17 PSF (TC=7, BC=10)

 *FLOOR TRUSS = 15 PSF (TC=10, BC=5)
- *FLOOR JOIST = 10 PSF *STANDARD BRICK = 40 PSF
- · QUEEN ANNE BRICK = 25 PSF

NOTE: STRUCTURAL FRAMING HAS NOT BEEN DESIGNED FOR TILE, GRANITE, MARBLE OR OTHER MATERIALS HEAVIER THAN THE ABOVE LOADING UNLESS SPECIFICALLY NOTED ON PLANS..

DESIGN WIND LOADS:

• ULTIMATE WIND SPEED = 115 MPH

• EXPOSURE CATEGORY = B

ASSUMED SOIL BEARING CAPACITY = 2000 PSF

ASSUMED LATERAL SOIL PRESSURE = 45 PCF

FROST DEPTH = 12" MINIMUM

SEISMIC DESIGN CATEGORY = B

ENGINEERED LUMBER SHALL HAVE THE FOLLOWING MINIMUM DESIGN VALUES:

* TJI 210 SERIES (SERIES AND SPACING PER PLANS)

* LSL: E=1,550,000 PSI, F₈=2,325 PSI, F₄=310 PSI, F₆=900 PSI

* LVL: E=2,000,000 PSI, F₈=2,600 PSI, F₈=286 PSI, F₈=750 PSI

* PSI: E=2,100,000 PSI, F₈=2,900 PSI, F₉=290 PSI, F₆=625 PSI

ENGINEERING E, SUITE 201, QUAKERTOWN, PA 18951

David Weekley Homes

Cover Sheet Serenity, Lot #50 B326 Blakestone Model 115 M.P.H. Carolina Raleigh, North

Project #: 047-22002 Designed By:LMR Checked By: Issue Date: 9/9/22

Re-Issue: Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34



THE CONTRACTOR'S FAILURE TO CONFORM TO THE CONTRACT

THE CONTRACTOR'S FAILURE TO CONFORM TO THE CONTRACT
DOCUMENTS, SHOULD ANY NON-CONFORMITE OCCUR.
THE SEP DOES NOT CEPTIFY DIMENSIONAL ACCURACY OR
THE SEP DOES NOT CEPTIFY DIMENSIONAL ACCURACY OR
ARCHHECTURAL LAYOUT INCLUDING PROOF GEOMETRY. THE SER
ASSUMES NO LUBBILITY FOR CHANGES MADE TO THESE PLANS BY
OTHERS, OR FOR CONSTRUCTION METHODS, OR FOR ANY DEVAITON
FROM THE PLANS. THE SER SHALL BE NOTIFIED PRIOR TO
CONSTRUCTION IF ANY DISCREPANCIES ARE NOTIFIED ON THE PLANS.
ANY STRUCTURAL ELEMENTS OR DETAILS NOT FULLY DEVELOPED ON
THE CONSTRUCTION DEAVINISS SHALL BE COMPITED WHOSE THE
DIRECTION OF A LICENSED PROFESSIONAL ENGINEER. THESE SHOP
DRAWINGS SHALL BE SUBMITTED TO KES ENDINEERING FOR REVIEW
BEFORE ANY CONSTRUCTION BEGINS. THE SHOP DRAWINGS WILL BE
STBUCTURAL DESIGN OF THIS PROJECT, VERRICATION OF THE SHOP
STRUCTURAL DESIGN OF THIS PROJECT, VERRICATION OF THE SHOP
DRAWINGS OF OVERALL COMPULANCE AS IT RELATES TO THE
STRUCTURAL DESIGN OF THIS PROJECT, VERRICATION OF THE SHOP
DRAWINGS FOR DIMENSIONS, OR FOR ACTUAL FIELD CONDITIONS, IS DRAWINGS FOR DIMENSIONS, OR FOR ACTUAL FIELD CONDITIONS, IS NOT THE RESPONSIBILITY OF THE SER OR KSE ENGINEERING, P.C. VERIFICATION OF ASSUMED FIELD CONDITIONS IS NOT THE

RESPONSIBILITY OF THE SER. THE CONTRACTOR SHALL VERIFY THE FIELD CONDITIONS FOR ACCURACY AND REPORT ANY DISCREPANCIES TO KSE ENGINEERING, P.C. BEFORE CONSTRUCTION BEGINS.
THE SER IS NOT RESPONSIBLE FOR ANY SECONDARY STRUCTURAL
ELEMENTS OR NON-STRUCTURAL ELEMENTS, EXCEPT FOR THE

FLEMENTS SPECIFICALLY NOTED ON THE STRUCTURAL DRAWINGS THIS STRUCTURE AND ALL CONSTRUCTION SHALL CONFORM TO ALL APPLICABLE SECTIONS OF THE BUILDING CODE AND ANY LOCAL CODES OR RESTRICTIONS.

9. DO NOT SCALE DRAWINGS. WRITTEN DIMENSIONS TAKE PRECEDENCE OVER SCALED DIMENSIONS ALL DIMENSIONS ARE TO EACE OF STUD OR TO EACE OF FRAMING LINLESS OTHERWISE NOTED WATERPROOFING AND FLASHING BY OTHERS

FOUNDATIONS:

FOUNDATIONS SHALL BE CONSTRUCTED IN ACCORDANCE WITH

CHAPTER 4 OF THE BUILDING CODE.

CONTRACTOR IS SOLELY RESPONSIBLE FOR VERIFYING THE SUITABILITY

OF THE SITE SOIL CONDITIONS AT THE TIME OF CONSTRUCTION. THE BUILDER SHALL FURNISH ANY AND ALL REPORTS RECEIVED FROM THE GEOTECHNICAL ENGINEER ON THE STUDY OF THE PROPOSED SITE TO THE DESIGNER, STRUCTURAL ENGINEER, AND GENERAL CONTRACTOR

CONTRACTOR.

MAXIMUM DEPTH OF UNBALANCED FILL AGAINST MASONRY WALLS TO BE AS SPECIFIED IN THE BUILDING CODE.

THE SER HAS NOT PERFORMED A SUBSURFACE INVESTIGATION. VERIFICATION OF THE ASSUMED VALUE IS THE RESPONSIBILITY OF THE OWNER OR THE CONTRACTOR. SHOULD ANY ADVERSE SOIL CONDITION BE ENCOUNTERED, THE SER MUST BE CONTACTED BEFORE DEPORTED.

THE BOTTOM OF ALL FOOTINGS SHALL EXTEND BELOW THE FROST LINE FOR THE REGION IN WHICH THE STRUCTURE IS TO BE CONSTRUCTED, BUT NOT LESS THAN A MINIMUM OF 12" BELOW GRADE. ALL FOOTINGS TO HAVE A MINIMUM PROJECTION OF 2" ON EACH SIDE OF FOUNDATION WALLS, MAXIMUM FOOTING PROJECTION SHALL NOT EXCEED THE THICKNESS OF THE FOOTING.
WOOD SILL PLATES SHALL BE ANCHORED TO THE FOUNDATION WITH

16" ANCHOR BOLTS WITH MINIMUM 7" EMBEDMENT, SPACED A MAXIMUM OF 6'-0" O.C. INSTALL MINIMUM 2 ANCHOR BOLTS PER SECTION, 12" MAXIMUM FROM CORNERS. ½" DIAMETER x 8" LONG SIMPSON TITEN HD OR USP SCREW-BOLT+ SCREWS MAY BE SUBSTITUTED ON A 1 FOR 1 BASIS FOR CONCRETE FOUNDATIONS ONLY.

ANY FILL SHALL BE PLACED UNDER THE DIRECTION OR

RECOMMENDATION OF A LICENSED PROFESSIONAL ENGINEER, THE RESULTING SOIL SHALL BE COMPACTED TO A MINIMUM OF 95% MAXIMUM DRY DENSITY

EXCAVATIONS OF FOOTINGS SHALL BE LINED TEMPORARILY WITH A 6
MIL POLYETHYLENE MEMBRANE IF PLACEMENT OF CONCRETE DOES NOT OCCUR WITHIN 24 HOURS OF EXCAVATION.

NO CONCRETE SHALL BE PLACED AGAINST ANY SUBGRADE CONTAINING WATER, ICE, FROST, OR LOOSE MATERIAL.

PROVIDE FOUNDATION WATERPROOFING AND DRAIN WITH POSITIVE

SLOPE TO OUTLET AS REQUIRED BY SITE CONDITIONS (SEE ARCHITECTURAL PLANS AND DETAILS).
NONE OF THE FOUNDATION DESIGNS IN THESE DOCUMENTS ARE SUITABLE

FOR INSTALLATION IN SHRINK/SWELL CONDITIONS, REFER TO

GEOTECHNICAL ENGINEER FOR APPROPRIATE DESIGN.
LOTS SHALL BE GRADED TO DRAIN SURFACE WATER AWAY FROM
FOUNDATION WALLS. THE GRADE SHALL FALL A MINIMUM OF 6 INCHES WITHIN THE FIRST TEN FEET.

WITHIN THE FIRST IER FEET.
CRAWL SPACE TO BE GRADED LEVEL AND CLEAR OF ALL DEBRIS.
PROVIDE MINIMUM 6 MIL APPROVED VAPOR BARRIER. ALL JOINTS TO
BE LAPPED MINIMUM 12" AND SEALED.

CONCRETE & REINFORCING

CONCRETE DESIGN BASED ON ACI 318 AND ACI 318.1 OR ACI 332.
CONCRETE SHALL HAVE A NORMAL WEIGHT AGGREGATE AND A MINIMUM
COMPRESSIVE STRENGTH (f'c) = 3,000 PSI MINIMUM AT 28 DAYS PER CODE (VARIES W/ WEATHER), UNLESS OTHERWISE NOTED ON THE PLAN. CONCRETE SHALL BE PROPORTIONED, MIXED, AND PLACED IN

ACCORDANCE WITH THE LATEST EDITIONS OF ACI 318: "BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE" AND ACI 301 "SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS"

AIR ENTRAINED CONCRETE MUST BE USED FOR ALL STRUCTURAL ELEMENTS EXPOSED TO FREEZE/THAW CYCLES AND DEICING CHEMICALS. ARE ENTRAINMENT AMOUNTS (IN PERCENT) SHALL BE WITHIN -1% TO +2% OF 5% FOR FOOTINGS AND EXTERIOR SLABS.

NO ADMIXTURES SHALL BE ADDED TO ANY STRUCTURAL CONCRETE WITHOUT WRITTEN PERMISSION OF THE SER. WATER ADDED TO

CONCRETE ON SITE SHALL NOT EXCEED THAT ALLOWED BY THE MIX

CONCRETE SLABS-ON-GRADE SHALL BE CONSTRUCTED IN ACCORDANCE WITH ACI 302.1R: "GUIDE FOR CONCRETE SLAB AND SLAB CONSTRUCTION" CONTROL OR SAW CUT JOINTS (CUT OR TOOLED) SHALL BE SPACED IN

INTERIOR SLABS-ON-GRADE AT A MAXIMUM OF 15'-0" O.C. AND IN EXTERIOR SLABS-ON-GRADE AT A MAXIMUM OF 10'-0" UNLESS OTHERWISE NOTED, CARE SHALL BE TAKEN TO AVOID RE-ENTRANT CORNERS

CONTROL OR SAW CUT JOINTS SHALL BE PRODUCED USING CONVENTIONAL CUT OR TOOLED PROCESSES WITHIN 4 TO 12 HOURS AFTER THE SLAB HAS BEEN FINISHED. REINFORCING STEEL MAY EXTEND THROUGH A SAW CUT JOINT

ALL WELDED WIRE FABRIC (W.W.F.) FOR CONCRETE SLABS—ON—GRADE SHALL BE PLACED AT MID—DEPTH OF SLAB. THE W.W.F. SHALL BE SECURELY SUPPORTED DURING THE CONCRETE POUR, FIBROUS CONCRETE REINFORCEMENT, OR POLYPROPYLENE FIRERS MAY BE LISED. CONCRETE REINFORCEMENT, OR POLYPROPYLENE FIBERS MAY BE USED IN LIEU OF WW.F. APPLICATION OF POLYPROPYLENE FIBERS PER CUBIC YARD OF CONCRETE SHALL BE PER MANUFACTURER AND COMPLY WITH ASTM C1116, ANY LOCAL BUILDING CODE REQUIREMENTS AND SHALL MEET OR EXCEED CURRENT INDUSTRY STANDARD.

POLYPROPYLENE REINFORCING TO BE 100% VIRGIN, CONTAINING NO REPROCESSED OLEFIN MATERIALS AND SPECIFICALLY MANUFACTURED FOR USE AS CONCRETE SECONDARY REINFORCEMENT.

11. STEEL REINFORCING BARS SHALL BE NEW BILLET STEEL CONFORMING TO ASTM A615, GRADE 60. DETAILING, FABRICATION, AND PLACEMENT OF REINFORCING STEEL SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF ACI 315: "MANUAL

OF STANDARD PRACTICE FOR DETAILING CONCRETE STRUCTURES". HORIZONTAL FOOTING AND WALL REINFORCEMENT SHALL BE

CONTINUOUS AND SHALL HAVE 90° BENDS, OR CORNER BARS WITH THE SAME SIZE/SPACING AS THE HORIZONTAL REINFORCEMENT. 14. PROVIDE REINFORCEMENT LAP AS NOTED BELOW, UNLESS NOTED

OTHERWISE: #4 BARS - 30" LENGTH

#5 BARS - 38" LENGTH #6 BARS - 45" LENGTH WHERE REINFORCING DOWELS ARE REQUIRED. THEY SHALL BE WHERE REPREVENING DOWELS ARE REQUIRED, THEI SHALL BE EQUIVALENT IN SIZE AND SPACING TO THE VERTICAL REINFORCEMENT.
THE DOWEL SHALL EXTEND 50 BAR DIAMETERS VERTICALLY AND 20 BAR DIAMETERS INTO THE FOOTING. SEE KSE FOUNDATION DETAILS.
 WHERE FOOTING BOTTOMS ARE TO BE STEPPED AT SLOPING GRADE

CONDITIONS PROVIDE CONTINUOUS REINFORCING WITH 7 BARS (TO

MATCH FOOTING REINFORCING) AS REQUIRED. 17. BAR SUPPORT ACCESSORIES SHALL BE PROVIDED IN ACCORDANCE WITH THE LATEST ACL MANUAL OF STANDARD PRACTICE FOR DETAILING REINFORCED CONCRETE STRUCTURES, EXCEPT THAT REINFORCING SHALL BE CHAIRED ON THE BOTTOM AND/OR THE SIDES ON BOLSTERS SPACED NOT MORE THAN 4 FEET ON CENTER NO ROCKS CMIL CLAY

SPACED NOT MORE HAM 4 FEET ON CENTER. NO ROCKS, CMU, CLAY TILE, OR BRICK SHALL BE USED TO SUPPORT REINFORCING. FOR GRADE SUPPORTED SLABS, SLAB REINFORCING SHALL BE HELD IN PLACE BY BAR SUPPORTS AND ACCESSORIES AS DESCRIBED IN THE CRSI MANUAL OF STANDARD PRACTICE, BAR SUPPORTS SHALL BE SPACED A MAXIMUM OF 4'-0" O.C. BOTH WAYS IN STRAIGHT LINES ON

MASONRY

ALL MASONRY SHALL CONFORM TO ASTM C-90, F'm=1500 PSI, ALL BRICK SHALL CONFORM TO ASTM C-216, F'm=1500 PSI. ALL MORTAR SHALL BE TYPE 'S' (TYPE 'M' BELOW GRADE) AND CONFORM TO ASTM C-270. COARSE GROUT SHALL CONFORM TO ASTM C-476 WITH A MAXIMUM AGGREGATE SIZE OF 36" AND A MINIMUM COMPRESSIVE STRENGTH OF 2,000

ALL MASONRY WORK SHALL BE IN ACCORDANCE WITH "BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES" ACI 530/ASCE 5/TMS 402 AND "SPECIFICATIONS FOR MASONRY STRUCTURES" ACI 530.1/ ASCE 6/TMS 602

THE UNSUPPORTED HEIGHT OF SOLID MASONRY PIERS SHALL NOT EXCEED TEN TIMES THEIR LEAST DIMENSION, UNFILLED HOLLOW PIERS MAY BE USED IF THE UNSUPPORTED HEIGHT IS NOT MORE THAN FOUR TIMES THEIR LEAST DIMENSION

FACH CRAWL SPACE PIER SHALL BEAR IN THE MIDDLE THIRD OF ITS RESPECTIVE FOOTING AND EACH GIRDER SHALL BEAR IN THE MIDDLE THIRD OF THE PIERS. PILASTERS TO BE BONDED TO PERIMETER FOUNDATION WALL

FOUNDATION WALL.
TOP COURSE OF MASONRY SHALL BE GROUTED SOLID.
HORIZONTAL WALL JOINT REINFORCEMENT SHALL BE STANDARD 9 GAGE
GALVANIZED LADDER OR TRUSS TYPE SPACED AT 16° O.C., UNILESS SHOWN OTHERWISE ON THE DRAWINGS.

SPLICED WIRE REINFORCEMENT SHALL BE LAPPED AT LEAST 6" AND CONTAIN AT LEAST ONE CROSS WIRE OF EACH PIECE OF REINFORCEMENT WITHIN THE 6". LAP WITH STANDARD 'T' AND 'L'

WOOD FRAMING:

SOLID SAWN WOOD FRAMING MEMBERS SHALL CONFORM TO THE SPECIFICATIONS LISTED IN THE LATEST EDITION OF THE "NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION* (NDS) LINEESS THERWISE NOTED, ALL WOOD FRAMING MEMBERS ARE DESIGNED TO

SPRUCE-PINE-FIR (SPE) WITH THE FOLLOWING MINIMUM DESIGN

VALUES: E=1,400,000 PSI, F_b=875 PSI, F_v=135 PSI

1.1. FRAMING: SPF #2.

1.2. PLATES: SPF #2. 1.3. STUDS: SPF STUD GRADE

ALL LUMBER EXPOSED TO WEATHER OR IN CONTACT WITH CONCRETE SHALL BE PRESERVATIVE TREATED SOUTHERN YELLOW PINE #2 OR

ANCHOR SILL PLATES IN ACCORDANCE W/ GENERAL STRUCTURAL NOTES. ALL BEAMS SPECIFIED ARE MINIMUM SIZES ONLY, LARGER MEMBERS MAY BE SUBSTITUTED AS NEEDED FOR EASE OF CONSTRUCTION. NAILS SHALL BE COMMON WIRE NAILS UNLESS OTHERWISE NOTED.

BOLT HOLES AND LEAD HOLES FOR LAG SCREWS SHALL BE IN ACCORDANCE WITH NDS SPECIFICATIONS

INDIVIDUAL STUDS FORMING A COLUMN SHALL BE ATTACHED WITH (2) ROWS 10d NAILS @ 6" O.C. STAGGERED, THE STUD COLUMN SHALL BE FULLY BLOCKED AT ALL FLOOR LEVELS TO ENSURE PROPER LOAD TRANSFER. WALL SHEATHING SHALL BE NAILED TO EDGE OF EACH STUD. FACE NAIL ALL MULTI-PLY BEAMS AND HEADERS WITH (2) ROWS 16d

COMMON NAILS @ 16" O.C., STAGGERED, OR PER MANUFACTURER'S SPECIFICATIONS FOR ENGINEERED LUMBER. APPLY NAILING FROM BOTH FACES FOR (3) OR MORE PLIES.

FASTEN 4-PLY BEAMS WITH (1) 1/2" DIAMETER THROUGH BOLT w/ NUT WASHERS AT 12" O.C. STAGGERED TOP AND BOTTOM, 16" MINIMUM EDGE DISTANCE, (UNLESS OTHERWISE NOTED)

ALL BEAMS AND HEADERS SHALL HAVE (1)2x JACK STUD & (1)2x KING STUD UNLESS OTHERWISE NOTED, THE NUMBER OF STUDS INDICATED ON PLANS ARE THE TOTAL NUMBER OF JACK STUDS REQUIRED, UNLESS

PROVIDE KING STUDS AT EACH END OF HEADERS AS NOTED BELOW. 16" O.C. STUD SPACING: (1) STUD UP TO 3' OPENING 24" O.C. STUD SPACING: (1) STUD UP TO 4' OPENING (2) STUDS UP TO 4' OPENING (2) STUDS UP TO 8' OPENING STUDS UP TO 8' OPENING (3) STUDS UP TO 12' OPENING (5) STUDS UP TO 12' OPENING (4) STUDS UP TO 16' OPENING (6) STUDS UP TO 16' OPENING
ALL BEAMS TO BE CONTINUOUSLY SUPPORTED LATERALLY AND SHALL

BEAR FULL WIDTH ON THE SUPPORTING WALLS OR COLUMNS INDICATED

BENF FOLK WIDTH ON THE SUPPORTING WALLS OF COLOMISS MOUNTED WITH A MINIMUM OF TWO STUDES, ONLESS OTHERWISE NOTED. ALL BEAM SPLICES SHALL OCCUR OVER SUPPORTS.

13. SOLID BLOCKING TO BE PROMIDED AT ALL POINT LOADS THROUGH FLOOR LEVELS TO THE FOUNDATION OR TO OTHER STRUCTURAL COMPONENTS. 14. ALL LUMBER SPECIFIED ON DRAWINGS IS INTENDED FOR DRY USE ONLY

(MOISTURE CONTENT <19%) UNLESS OTHERWISE NOTED.
ALL WATERPROOFING AND FIRE SAFETY SYSTEMS ARE TH RESPONSIBILITY OF THE CONTRACTOR AND ARE TO BE DESIGNED AND

DETAILED BY OTHERS DETAILED BY OTHERS.
ANY WOOD FRAME INTERIOR BEARING WALL STUDS THAT HAVE HOLES IN THE CENTER OF THE STUD UP TO 1" DIAMETER SHALL HAVE STUD PROTECTION SHIELDS. ALL HOLES OVER 1" IN DIAMETER FOR PLUMBING

LINES, ETC. SHALL BE REPAIRED WITH SIMPSON HSS2 OR USP STS1 STUD SHOES, TYPICAL, UNLESS OTHERWISE NOTED. BEARING WALLS SHALL BE SHEATHED ON NOT LESS THAN ONE SIDE WITH OSB OR GYPSUM BOARD. BRIDGING SHALL BE INSTALLED NOT GREATER THAN 4 FEET APART MEASURED VERTICALLY FROM EITHER END OF THE STUD IN LIEU OF SHEATHING.

EXTERIOR WOOD FRAMED DECKS:

DECKS ARE TO BE FRAMED IN ACCORDANCE WITH APPLICABLE BUILDING CODES AND AS REFERENCED ON THE STRUCTURAL PLANS.

EITHER THROUGH CODE REFERENCES OR CONSTRUCTION DETAILS.
PRESERVATIVE TREATED WOOD FRAMING TO BE SOUTHERN YELLOW PINE #2 OR BETTER.

GUARD RAILS AND LATERAL BRACING IS REQUIRED AT DECKS. DESIGN BY

PROVIDE DECK LATERAL LOAD CONNECTIONS PER BUILDING CODE

RAFTER FRAMED ROOF CONSTRUCTION:

PROVIDE 2x4x4"-0" RAFTER TIES AT 50" O.C.
RAFTERS SHALL BE SUPPORTED BY PURLINS AND PURLIN BRACES
AS SHOWN ON THE PLAN. PURLIN BRACES SHALL NOT BEAR ON ANY CELLING JOIST STRONGRACK OR HEADER LINEESS SPECIFICALLY

SHOWN ON PLAN. RAFTERS MAY BE SPLICED AT PURLIN LOCATIONS.
CEILING JOISTS SHALL HAVE LATERAL SUPPORT W/ 1x4 FLAT BRACING ON TOP FOCE OF JOIST AT LOOSE JOIST FNDS (WHERE JOISTS NOT FASTENED TO RAFTERS) OR FULL DEPTH BLOCKING. FASTEN END OF BRACING TO RAFTER OR GABLE END FRAMING.

FASTEN RAFTER AND CEILING JOIST WITH (6) 12d NAILS UNLESS OTHERWISE NOTED.

PROVIDE VERTICAL 2x6 STRONGBACKS AT CEILING JOISTS @ 8'-0" O.C. TIE STRONGBACK ENDS TO GABLE STUDS OR RAFTERS WHERE POSSIBLE. PROVIDE BLOCKING BETWEEN TOP PLATES AND STRONGBACKS. PROVIDE 2x4 FLAT FASTENED TO EACH JOIST WITH (2) 12d NAILS FASTEN STRONGRACK TO 2v4 FLAT WITH 12d NAILS 12" O.C. AND FASTENED TO EACH JOIST WITH (1) 12d TOENAIL.

WOOD TRUSSES (FLOOR & ROOF):

THE WOOD TRUSS MANUFACTURER/FABRICATOR IS RESPONSIBLE FOR THE DESIGN OF THE WOOD TRUSSES. SUBMIT SEALED SHOP DRAWINGS AND SUPPORTING CALCULATIONS TO THE SER FOR REVIEW PRIOR TO FABRICATION. THE SER SHALL HAVE A MINIMUM OF (5) DAYS FOR REVIEW. THE REVIEW BY THE SER SHALL BE FOR OVERALL COMPLIANCE OF THE DESIGN DOCUMENTS. THE SER SHALL ASSUME NO RESPONSIBILITY FOR THE CORRECTNESS OF THE STRUCTURAL DESIGN FOR THE WOOD TRUSSES.

THE WOOD TRUSSES SHALL BE DESIGNED FOR ALL REQUIRED LOADINGS AS SPECIFIED IN THE LOCAL BUILDING CODE THE ASCE STANDARD. MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES. (ASCE 7), AND THE LOADING REQUIREMENTS SHOWN ON THESE SPECIFICATIONS. THE TRUSS DRAWINGS SHALL BE COORDINATED WITH ALL OTHER CONSTRUCTION DOCUMENTS AND PROVISIONS PROVIDED FOR LOADS SHOWN ON THESE DRAWINGS INCLUDING BUT NOT LIMITED TO HVAC FOLIPMENT, PIPING, AND ARCHITECTURAL FIXTURES ATTACHED TO THE TRUSSES.

THE TRUSSES SHALL BE DESIGNED, FABRICATED, AND ERECTED IN ACCORDANCE WITH THE LATEST EDITION OF THE ANSI/TPI 1: "NATIC DESIGN STANDARD FOR METAL PLATE CONNECTED WOOD TRUSS CONSTRUCTION"

THE TRUSS MANUFACTURER SHALL PROVIDE ADEQUATE BRACING INFORMATION IN ACCORDANCE WITH "BUILDING COMPONENT SAFETY INFORMATION GUIDE TO GOOD PRACTICE FOR HANDLING, INSTALLING, RESTRAINING & BRACING OF METAL PLATE CONNECTED WOOD TRUSSES' (BCSI) THIS BRACING BOTH TEMPORARY AND PERMANENT SHALL BE SHOWN ON THE SHOP DRAWINGS ALSO, THE SHOP DRAWINGS SHALL SHOW THE REQUIRED ATTACHMENTS FOR THE TRUSSES.

THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING TEMPORARY BRACING AND SHORING FOR THE FLOOR AND ROOF TRUSSES AS REQUIRED DURING CONSTRUCTION. AT A MINIMUM, CONTRACTOR SHALL FOLLOW THE REQUIREMENTS OF THE LATEST BOST. THE CONTRACTOR SHALL FOLLOW THE CROWNER OF THE LATEST BOST. THE CONTRACTOR SHALL KEEP A COPY OF THE BCSI SUMMARY SHEETS ON SITE.

THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING ALL PERMANENT THE CONTROLLOR RESPONSIBLE FOR INSTALLAR ALL PERMANENT TRUSS BRACING SHOWN IN THE STRUCTURAL DRAWINGS AND IN THE TRUSS DESIGNS. ALL CONTINUOUS LATERAL BRACING OF WEBS REQUIRES BRACES, REFET TO BCSI SUMMARY SHEET BS FOR TYPES OF DIAGONAL BRACES TO PROVIDE AT EACH CONTINUOUS LATERAL BRACE LINE, SUCH BRUZES TO PROVIDE AT BUSH CONTINUOUS SILEPERS PARED MORE THAN 20 FEET O.C. DIGGONAL BRACES SHALL NOT BE SPACED MORE THAN 20 FEET O.C. DIGGONAL BRACES SHALL BE FASTENED TO EACH TREVE SWEED WITH MINIMUM OF THOM 104 FACE SHALLS. WHERE CONTINUOUS LATERAL BRACING CANNOT BE INSTALLED, DUE TO A MINIMUM OF THREE ADJACENT TRUSSES NOT BEING IDENTICAL, THE CONTINGATION SHALL COORDINATE WITH THE TRUSS SPECIALTY ENGINEER/MANUFACTURER TO DETERMINE WHAT TYPE OF ALTERNATE BRACE (I.E., T OR L BRACE, ETC.) IS REQUIRED

ANY CHORDS OR TRUSS WERS SHOWN ON THESE DRAWINGS HAVE REEN SHOWN AS A REFERENCE ONLY. THE FINAL DESIGN OF THE TRUSSES SHALL BE PER THE MANUFACTURER.
TRUSS LAYOUT AND PLACEMENT BY MANUFACTURER TO COINCIDE WITH

THE SUPPORT LOCATIONS SHOWN ON THE SEALED STRUCTURAL DRAWINGS, TRUSS PROFILES TO BE SEALED BY THE TRUSS
MANUFACTURER, TRUSS PLANS TO BE COORDINATED WITH THE SEALED STRUCTURAL DRAWINGS.

TRUSS MANUFACTURER TO PROVIDE REQUIRED UPLIFT CONNECTORS FOR ALL TRUSSES

PROVIDE SIMPSON H2.5A. USP RT7 OR EQUIVALENT AT EACH TRUSS TO TOP PLATE CONNECTION, UNLESS OTHERWISE NOTED.

WOOD STRUCTURAL PANELS:

1. FABRICATION AND PLACEMENT OF STRUCTURAL WOOD SHEATHING SHALL BE IN ACCORDANCE WITH THE APA DESIGN/CONSTRUCTION GUIDE "RESIDENTIAL AND COMMERCIAL," AND ALL OTHER APPLICABLE APA STANDARDS

STRUCTURALLY REQUIRED WOOD SHEATHING SHALL BEAR THE

LISING 76" OSR MINIMIM AT RRACED WALL PANELS PROVIDE BLOCKING AT ALL SHEET EDGES NOT FALLING ON STUDS OR

PLATES,
ROOF SHEATHING SHALL BE APA RATED SHEATHING EXPOSURE 1 OR 2. ROOF SHEATHING SHALL BE CONTINUOUS OVER TWO SUPPORTS MINIMUM AND ATTACHED TO ITS SUPPORTING ROOF FRAMING WITH 88 NAIL AT 6" O.C. AT PANEL EDGES AND AT 12" O.C. IN PANEL FIELD UNLESS OTHERWISE NOTED ON THE PLANS. SHEATHING SHALL BE APPLIED WITH THE LONG DIRECTION PERPENDICULAR TO FRAMING BE APPLIED WITH THE LONG DIRECTION PERPENDICUOAR TO FRAMIN SHEATHING SHALL HAVE A SPAN RATING CONSISTENT WITH THE FRAMING SPACING, PROVIDE SUITABLE EDGE SUPPORT BY USE OF PLYWOOD CLIPS OR LUMBER BLOCKING UNLESS OTHERWISE NOTED. PANEL END JOINTS SHALL OCCUR OVER FRAMING, ROOF SHEATHING

TO BE $\frac{7}{6}$ OSB MINIMUM. WOOD FLOOR SHEATHING SHALL BE APA RATED SHEATHING EXPOSURE 1 OR 2. ATTACH SHEATHING TO ITS SUPPORTING FRAMING WITH (1) 104 NAIL AT 6" O.C. AT PANEL EDGES AND AT 12" O.C. IN PANEL FIELD UNLESS OTHERWISE NOTED ON THE PLANS. SHEATHING SHALL BE APPLIED PERPENDICULAR TO FRAMING SHEATHING SHALL HAVE A SPAN RATING CONSISTENT WITH THE SHEATHING SHALL HAVE A SHAN RATING CONSISTENT WITH THE FRAMING SPACING. PROVIDE SUITABLE EDGE SUPPORT BY USE OF T&G PLYWOOD OR LUMBER BLOCKING UNLESS OTHERWISE NOTED. PANEL END JOINTS SHALL OCCUR OVER FRAMING.

SHEATHING SHALL HAVE A %" GAP AT PANEL ENDS AND EDGES AS RECOMMENDED IN ACCORDANCE WITH THE APA

STRUCTURAL FIBERBOARD PANELS

SHEATHING SHALL BE IN ACCORDANCE WITH THE APPLICABLE AFA

FIBERBOARD WALL SHEATHING SHALL COMPLY WITH THE REQUIREMENTS OF LOCAL BUILDING CODES FOR THE APPROPRIATE STATE AS INDICATED ON THESE DRAWINGS. REFER TO WALL BRACING NOTES IN PLAN SET FOR MORE INFORMATION

STRUCTURAL STEEL:

1. STRUCTURAL SITEL SHALL BE FABRICATED AND ERECTED IN ACCORDANCE WITH THE AMERICAN INSTITUTE OF STEEL CONSTRUCTION "CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES" AND OF THE MANUAL OF STEEL CONSTRUCTION "LOAD RESISTANCE FACTOR DESIGN" LATEST EDITIONS. ALL STEEL SHALL HAVE A MINIMUM YIELD STRESS (F.) OF 50 KSI

UNLESS OTHERWISE NOTED.
WELDING SHALL CONFORM TO THE LATEST EDITION OF THE AMERICAN WELDING SOCIETY'S STRUCTURAL WELDING CODE AWA DI.1. ELECTRODES FOR SHOP AND FIELDING WELDING SHALL BE CLASS F70XX. ALL WELDING SHALL BE PERFORMED BY A CERTIFIED WELDER PER THE ABOVE STANDARDS.

ALL STEEL BEAMS TO BE SUPPORTED AT EACH END WITH A

MINIMUM BEARING LENGTH OF 38" AND FULL FLANGE WIDTH UNLESS OTHERWISE NOTED. BEAMS MUST BE ATTACHED AT EACH END WITH A MINIMUM OF FOUR 16d NAILS OR (2) 1/2" x 4" LAG SCREWS


UNLESS OTHERWISE NOTED.

INSTALL 2x WOOD PLATE ON TOP OF STEEL BEAMS, RIPPED TO MATCH BEAM WIDTH, FASTEN PLATE TO BEAM w/ HILTI X-DNI 52 P8 PINS AT 12" O.C. STAGGERED OR 1/2" DIAMETER BOLTS AT 24"

MECHANICAL FASTENERS:

PRESSURE TREATED LUMBER SHALL BE HOT DIPPED GALVANIZED IN ACCORDANCE WITH ASTM A 153, G-185,

SELECT APPROPRIATE CONNECTORS THAT WILL RESIST THE APPLICABLE CORROSIVE CHEMICALS.



BRICK VENEER LINTEL SCHEDULE			
SPAN LINTEL SIZE		END BEARING	
UP TO 3'-0"	3½"x3½"x¼"	4"	
UP TO 6'-3"		8"	
UP TO 9'-6"	6"x3½"x516" L.L.V. 12"		
LINTELS ARE NOT DESIGNED TO BE BOLTED TO HEADERS UNLESS SPECIFIED ON UNIT PLANS. SPANS OVER 4'-0" SHALL BE SHORED UP UNTIL CURED.			



STRUCTURAL FIBERBOARD SHEATHING SHALL ONLY BE USED WHERE SPECIFICALLY NOTED ON THE STRUCTURAL PLANS. FABRICATION AND PLACEMENT OF STRUCTURAL FIBERBOARD

STANDARDS

SHEATHING SHALL HAVE A 1/8" GAP AT PANEL ENDS AND EDGES AS RECOMMENDED IN ACCORDANCE WITH THE AFA.

ALL METAL HARDWARE AND FASTENERS TO BE SIMPSON STRONG-TIE OR APPROVED EQUIVALENT. ALL HARDWARE AND FASTENERS IN CONTACT WITH PRESERVATIVE

ACCUPOANCE WITH ASIM A 133, G-183.

MANY OF THE NEW PRESSURE TREATED WOODS USE CHEMICALS
THAT ARE CORROSIVE TO STEEL. IT IS THE CONTRACTOR'S
RESPONSIBILITY TO VERIFY THE TYPE OF WOOD TREATMENT AND



Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

Model

Not

Structural

General

50 , Lot #50 lakestone

#

اد. renity, مم Blr

Designed By: LMR

Issue Date: 9/9/22

Checked By:

Re-Issue:

Serer B326 115

Project #: 047-22002

Carolina

.H. North

Ralei

┙. igh,

 \geq

ERING
TOWN, PA 18951
(215) 804-4449

Ш

NUBN

Ш


S

Homes

<u>ა</u>გ

Weekl

David 7

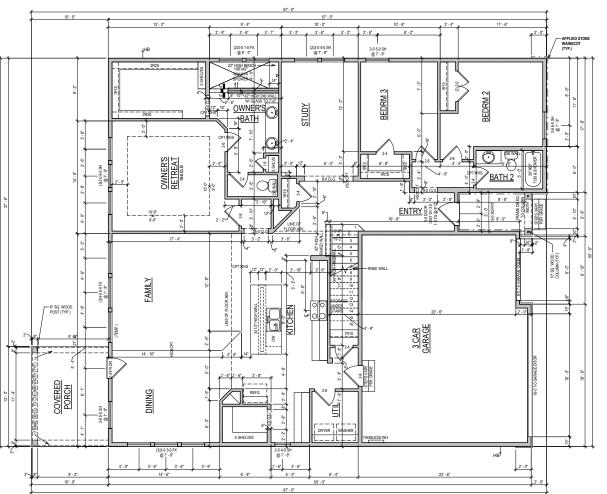

FIRST FLOOR

GENERAL REQUIREMENTS

GARAGE FLOOR TO BE SLOPED 1/8" PER FOOT TOWARDS VEHICLE ENTRY DOOR

FINISHED GUARDRAILS REQUIRED AT DECKS, BALCONIES AND WALKWAYS THAT ARE 30° OR GREATER ABOVE GRADE AND BE AT A MINIMUM OF 36° IN HEIGHT

FINISHED GUARDRAIL AND HANDRAIL SPINDLES MUST BE SPACED SO A 4" SPHERE WILL NOT PASS THROUGH.

OPTION LIST

SUPER SHOWER TRAY @OWNER'S RETREAT

PREESTANDON 118 W OPT SUPER OWNERS TRAY CELAN SPEES HAVINES W/O PT SUPER OWNERS RETERAL WO PT SUPER OWNERS RETERAL WO PT SUPER OWNERS RETERAL WO PT SUPER OWNERS SPEES RECORDED WON THE SUPER OWNERS AT THE SUPER OWNERS A

ADVANCED FRAMING: 2X6 EXTERIOR PERIMETER WALLS & ALL INSULATED WALLS UNLESS NOTED OTHERWISE

NOTE: ALL 1ST FLR. CEILING HEIGHTS 9' - 0" UNLESS NOTED OTHERWISE

PLAN SQFT		
VING		
T FLOOR	2155 SF	
ID FLOOR	476 SF	
OTAL LIVING	2631 SF	
.AB		
T FLOOR	2155 SF	
OVERED PORCH	130 SF	
RONT PORCH	49 SF	
ARAGE	596 SF	
TAL SLAB	2930 SF	
RAMING		
T FLOOR	2155 SF	
ID FLOOR	427 SF	
OVERED PORCH	130 SF	
RONT PORCH	49 SF	
ARAGE	596 SF	
OTAL FRAMING	3357 SF	

SOUTH **B326-A** PLN-1 BLAKESTONE RALEIGH


David Weekley Homes 20

Scale:1/8"=1'-0" Rev: 4/28/22 EB

BR/JP/MW Date: 03/09/2021 . Block: Lot:

Proj. No.: 3277 Job No.: 0050

SERENITY 65' 57 SERENDIPITY DR FUQUAY VARINA, NC

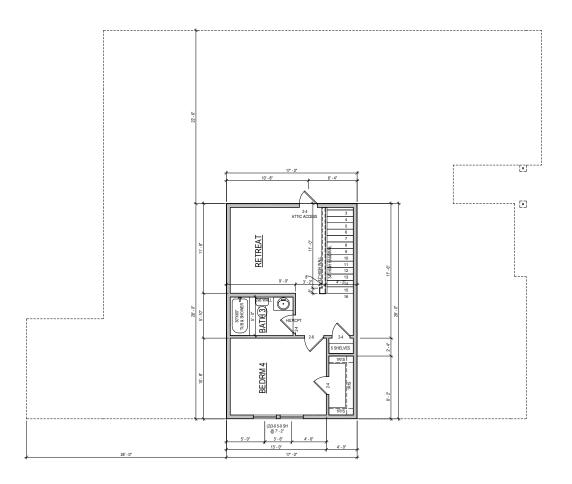

SECOND FLOOR

NOTE: ALL 2ND FLR. CEILING HEIGHTS 9' - 0" UNLESS NOTED OTHERWISE

ADVANCED FRAMING: 2X6 EXTERIOR PERIMETER WALLS & ALL INSULATED WALLS UNLESS NOTED OTHERWISE

David Weekley Homes 50 Block: Lot: Proj. No.: 3277 Job No.: 0050

Week key Homes L.P. 202
The measurements of any seguidation, and other operational phown on this societies we guideline size for control only. The actual specifications of the finished stream vine; This decument many not be reliable on a a remain of what the coordination.

Scale:1/8"=1'-0" Rev: 4/28/22 EB


BR/JP/MW Date: 03/09/2021

SERENITY 65' 57 SERENDIPITY DR FUQUAY VARINA, NC

SOUTH B326-A PLN-2 BLAKESTONE RALEIGH

ENGINEERING
E, SUITE 201, QUAKERTOWN, PA 18951
com (215) 804-4449





BLOCKING DETAILS) REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES, TYPICAL DETAILS AND ADVANCED FRAMING NOTES AND DETAILS

(1) (2)#4 x 4'-0" LONG BARS AT 3" O.C., CENTERED IN SLAB, TYP. WHERE SHOWN



KEYNOTES:

Monolithic Slab Foundatic Serenity, Lot #50 B326 Blakestone Model 115 M.P.H. Raleigh, North Carolina Project #: 047-22002 Designed By:LMR Checked By: Issue Date: 9/9/22

Re-Issue: 9/23/22 Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

12'-6" CONTROL-JOINT (TYP.) 1'-6" GARAGE SLAB 4" THICK CONCRETE SLAB w/ FIBERMESH PER MANUFACTURER OR 6x6 W1.4xW1.4 WELDED WIRE MESH ON 6 MIL VAPOR BARRIER ON 95% COMPACTED FILL. SLOPE 1/8" PER 1'-0" TOWARDS DOOR. 4" THICK CONCRETE SLAB w/ FIBERMESH PER MANUFACTURER OR 6x6 W1.4xW1.4 WELDED WIRE MESH ON 95% COMPACTED FILL. 16" WIDE x 20" DEEP
MONOLITHIC CONCRETE
FOOTING (TYP.) TURNDOWN SLAB 16" WIDE x 20" DEEP MONOLITHIC CONCRETE FOOTING. PROVIDE 6" STEM @ GARAGE. 12'-4" 10'-4" 10'-4"

67'-0"

11)

57'-0"

11'-8"

SLAB ON GRADE 4" THICK CONCRETE SLAB w/ FIBERMESH PER MANUFACTURER OR 6x6

W1.4xW1.4 WELDED WIRE MESH ON 6 MIL VAPOR BARRIER ON 95% COMPACTED FILL.

22'-0"

10'-0"

8" DEEP x 16"-WIDE THICKENED SLAB (TYP.)

176-73/16

Ī-1'-10"

- 4" THICK CONCRETE SLAB w/ FIBERMESH PER MANUFACTURER OR 6x6 W1.4xW1.4 WELDED WIRE MESH ON 95% COMPACTED FILL.

11'-6"

16" WIDE x 20"-

DEEP MONOLITHIC CONCRETE FOOTING (TYP.)

9'-8"

10'-0"

LINE OF RECESSED— SHOWER, SEE ARCHITECTURAL PLANS.

MONOLITHIC SLAB FOUNDATION PLAN

33'-0"


KSI

ENGINEERING

E. SUITE 201, QUAKERTOWN, PA 18951

COM

(215) 804-4449

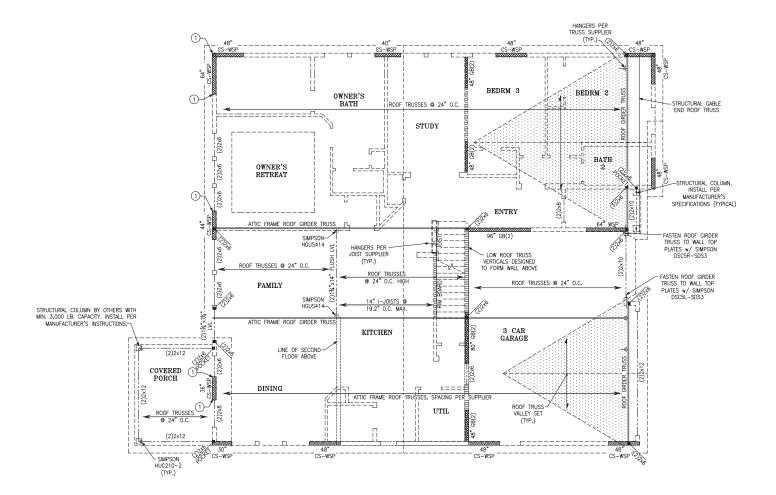

LEGEND PROVIDE SOLID BLOCKING WITHIN FLOOR SYSTEM TO MATCH POST SIZE ABOVE.

⇒ BEARING WALL ABOVE □□□□□□ ⇒ INTERIOR BEARING WALL

⇒ BRACED WALL PANEL (SEE KSE STRUCTURAL DETAILS SET FOR BRACED WALL PANEL SHEATHING FASTENING & BLOCKING DETAILS)

REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES, TYPICAL DETAILS AND ADVANCED FRAMING NOTES AND DETAILS

PLAN DESIGNED WITH 9' NOMINAL WALL PLATE HEIGHT

FLOOR FRAMING TO BE 14" DEEP TJI 210 SERIES OR EQUAL, SPACING PER MANUFACTURER.


AT RAISED FLOOR BELOW, CONNECT STUD AT END OF BRACED WALL PANEL TO FRAMING BELOW WITH A 30" LONG SIMPSON CS20 COIL STRAP WITH MIN 8-10d NAILS FACH END. AT SLAB FOUNDATION BELOW, CONNECT STUD TO FOUNDATION w/ SIMPSON DTT1Z w/ SIMPSON 36"x6" TITEN HD SCREW ANCHOR AND 3½" MINIMUM EMBEDMENT.

ty, Lot #50 Blakestone Model Plan Roof Framing P Serenity, Lot #5 B326 Blakeston 115 M.P.H. Raleigh, North (Project #: 047-22002

Designed By:LMR Checked By: Issue Date: 9/9/22 Re-Issue: 9/23/22 Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

Carolina



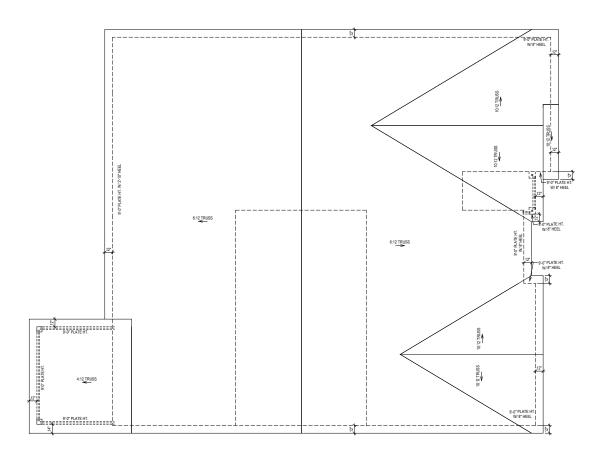

ROOF PLAN

David Weekley Homes Scale:1/8"=1'-0" Rev: 4/28/22 EB

BR/JP/MW Date: 03/09/2021 20 Lot:

SERENITY 65' 57 SERENDIPITY DR FUQUAY VARINA, NC

Proj. No.: 3277 Job No.: 0050

SOUTH B326-A RFP-1 BLAKESTONE RALEIGH

ADDG VENT

ROOF VENT CALCULATION: ATTIC SPACE: 2930 SQ.FT. REQUIRED VENTILATION: 1406 SQ.IN. REQ.

SOFFIT VENT PROVIDED: 58 LINEAL FEET RIDGE VENT PROVIDED: 62 LINEAL FEET AIR HAWK VENT PROVIDED: 0 UNITS

PROVIDED VENTILATION: 1406 SQ.IN.

50-80% IN UPPER PORTION: 79%

SOUTH B326-A RFP-2 BLAKESTONE

RALEIGH

ATTIC VENT CALCULATION


Week key Homes L.P. 2021


The measuments, dimensions, and other specifications show on this document we agnidishes to construction use only. The actual specifications of the finished structure may very. This document may not be relief on as a representation of the trian may use to complete the complete of the triangle of the tr

David Weekley Homes
BRUDIMW Scale:1/8"=1'-0"
Date: Rev: 4/28/22 EB

Proj. No.: Lot. 50 3277 Block: -Job No.: Block: -

SERENITY 65' 57 SERENDIPITY DR FUQUAY VARINA, NC

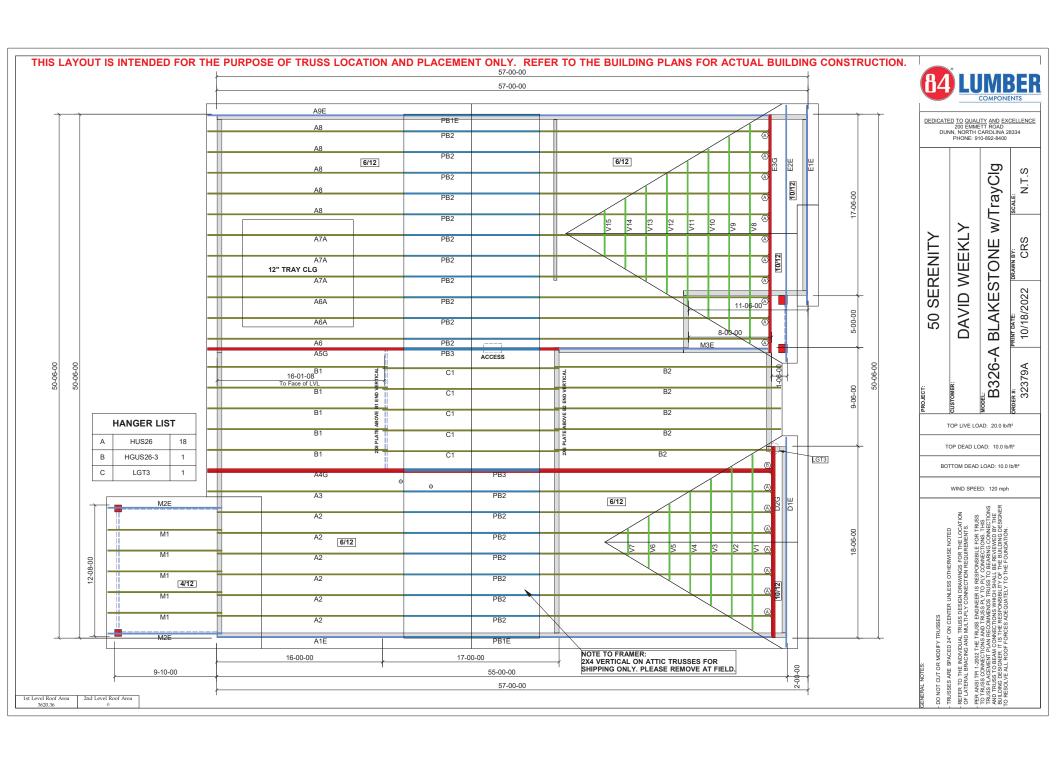

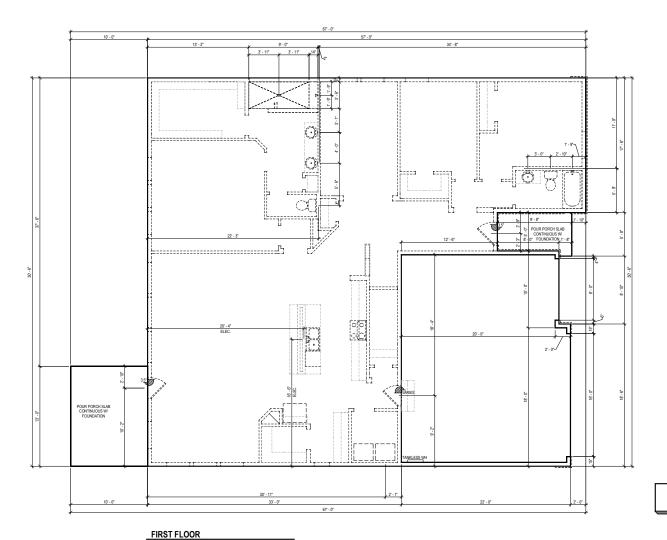

SEE ENGINEERING FOR ANCHOR BOLT REQUIREMENTS


Weekley Homes LP. 2021
The measurement demonstry, and one specification proving none only. The setal specification of the flushment are gladeless for construction only. The certain specification of the finite description in any not be related on as a represent of what the completed flushment will look like.

David Weekley Homes

3277 Lot: 50 3277 Block: -

SERENITY 65' 57 SERENDIPITY DR FUQUAY VARINA, NC

B326-A FS-1 BLAKESTONE RALEIGH

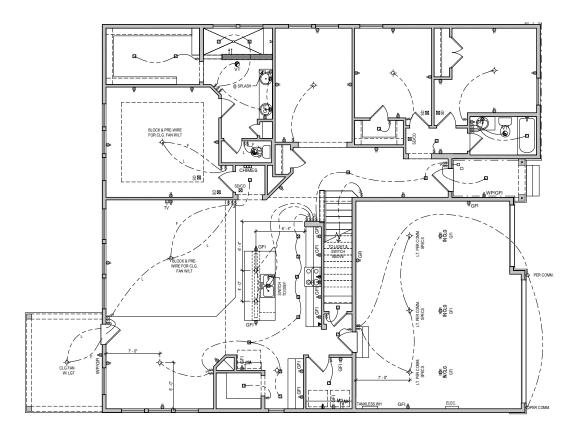

FIRST FLOOR

Week key Homes L.P.
The measurements, dimensions, and other specially for the state of the special spe

David Weekley Homes

20

Scale:1/8"=1'-0" Rev: 4/28/22 EB

BR/JP/MW Date: 03/09/2021

Block: Fot

Proj. No.: 3277 Job No.: 0050

SERENITY 65' 57 SERENDIPITY DR FUQUAY VARINA, NC

IN ALL HABITABLE ROOMS LIGHT BOXES MUST BE FAN RATED

110V OUTLET 12" A.F.F. (U.N.O.) GROUND FAULT INTERRUPTOR (WEATHER PROOF AS NOTED) 1/2 HALF HOT OUTLET 220V OUTLET (36*A.F.F. @ UTILITY) PHONE LINE CABLE TELEVISION STANDARD SWITCH (3 OR 4 WAY AS NOTED) - SURFACE MOUNTED LIGHT - SURFACE MOUNTED LED DISC LIGHT Q WALL MOUNTED LIGHT RECESS CAN LIGHT (EYEBALL AS NOTED) VT EXHAUST VENT ALL RECESS CANS SHOWN ON PLAN ARE **LED** PER COMMUNITY SPEC. SD SMOKE DETECTOR (CARBON MONOXIDE AS D NOTED) DOOR BELL CHIMES DOOR BELL ELEC PANELBOARD W/ CIRCUIT HB BREAKERS HOSE BIB GAS GAS TAP

CW HW T COLD/HOT WATER SUPPLY

UTILITY LEGEND

MID-ATLANTIC General Notes


ALL ELECTRICAL PLUGS TO BE 9" TO TOP FROM FLOOR IN ROOMS WITH WALL MOULDINGS.

2. SWITCH FOR ATTIC LIGHT TO BE LOCATED OUTSIDE OF ATTIC SPACE, 12 INCHES FROM CEILING.

3. DO NOT RUN WIRES ON TOP OF JOISTS IN AREAS LIKELY TO HAVE DECKING IN ATTIC. (near disappearing stairs)

6. LOCATE ELECTRICAL PANEL IN LOCATION CLOSEST TO SERVICE.



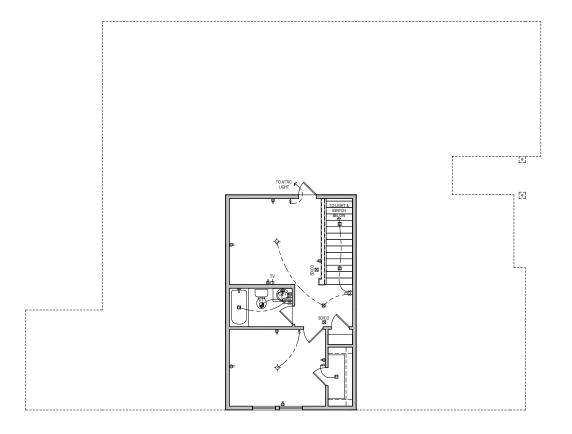


SECOND FLOOR

Scale:1/8"=1'-0" Rev: 4/28/22 EB

BR/JP/MW Date: 03/09/2021

IN ALL HABITABLE ROOMS LIGHT BOXES MUST BE FAN RATED

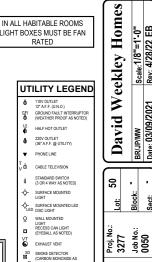

ALL RECESS CANS SHOWN
ON PLAN ARE **LED** PER
COMMUNITY SPEC.

		(EYEBALL AS NOTED)
7	VT ⊕	EXHAUST VENT
2	SD D	SMOKE DETECTOR (CARBON MONOXIDE AS NOTED) DOOR BELL
	CHIMES ELEC HB+	DOOR BELL CHIMES PANELBOARD W/ CIRCUIT BREAKERS HOSE BIB
	GAS	GAS TAP
3	CW HW	COLD/HOT WATER SUPPLY
	f	ELEVATOR CALL BUTTON

MID-ATLANTIC General Notes

ALL ELECTRICAL PLUGS TO BE 9" TO TOP FROM FLOOR IN ROOMS WITH WALL MOULDINGS.


2. SWITCH FOR ATTIC LIGHT TO BE LOCATED OUTSIDE OF ATTIC SPACE, 12 INCHES FROM CEILING.

3. DO NOT RUN WIRES ON TOP OF JOISTS IN AREAS LIKELY TO HAVE DECKING IN ATTIC. (near disappearing stairs)

6. LOCATE ELECTRICAL PANEL IN LOCATION CLOSEST TO SERVICE.

SOUTH B326-A ELE-2 BLAKESTONE RALEIGH

SERENITY 65' 57 SERENDIPITY DR FUQUAY VARINA, NC

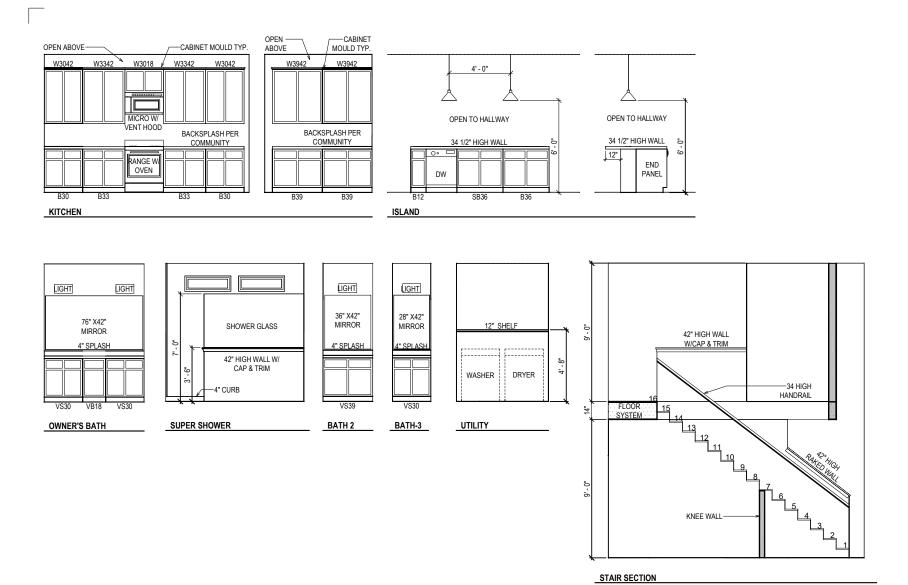

© Week key Homes L.P. 2021
The measurement dimensions, and not specifications above no this document are goldeness for construction use only. The status applications of the inhand securement may not be occurred in any order size occurred in any order size occurred in any other size occurred in a size occurred

 David Weekley Homes

 BRJPINW
 \$cale:1/4"=1.0"


 Date: 03/09/2021
 Rev: 4/28/22 EB

9277 Lot: 50 3277 Block: 7 0050 Sect: -

SERENITY 65' 57 SERENDIPITY DR FUQUAY VARINA, NC

SOUTH
B326-A
INT-1
BLAKESTONE
RALEIGH

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

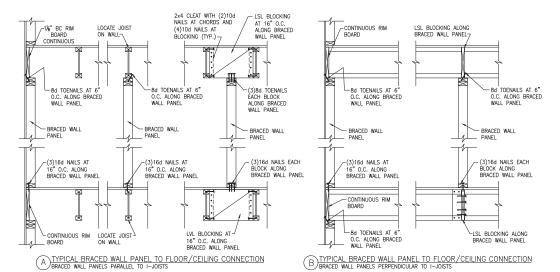

1.25" TYPE W SCREWS AT 7" O.C.

(OR 5d COOLER NAILS AT 7" O.C.) 2x4 BLOCKING BTWN VERTICAL WALL STUDS AT ALL HORIZONTAL GYPSUM 2x6 FULL HEIGHT STUD AT WALL INTERSECTION -(2x8 STUD AT BRACED SHEATHING JOINTS. INTERSECTING 2x6 WALL) 3-STUD WALL "T" PLATE WALL INTERSECTION INTERSECTION

1/2" (MIN) GYPSUM WALLBOARD. FASTEN TO WALL ALL SUPPORTS (STUDS, PLATES, BLOCKING) WITH

BRACED WALL INTERSECTIONS MAY BE FRAMED USING EITHER THE 3-STUD OR THE T-PLATE METHOD

© METHOD GB(1) AND GB(2) INTERSECTION DETAILS

- 8D NAIL @ 6" O.C. AT ALL EDGES AND

12" O.C. TYPICAL AT ALL OTHER


MEMBERS

~16D NAIL

OUTSIDE CORNER PLAN VIEW

@ 12" O.C.

-GYPSUM BOARD

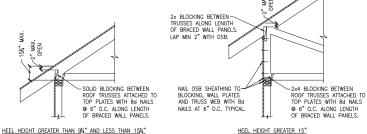

D TYPICAL EXTERIOR CORNER WALL FRAMING

EXTERIOR SHEATHING

GYPSUM BOARD

EXTERIOR SHEATHING-

16D NAIL

@ 12" 0.0

INSIDE CORNER PLAN VIEW

NOTE: A THIRD STUD AND/OR PARTITION INTERSECTION BACKING STUDS SHALL BE PERMITTED TO BE OMITTED
THROUGH THE USE OF WOOD BACKUP CLEATS, METAL
DRYWALL CLIPS OR OTHER APPROVED DEVICES THAT WILL SERVE AS ADEQUATE BACKING FOR THE FACING MATERIALS.

E ROOF TRUSS BEARING/BLOCKING AT BRACED WALL PANELS ONLY REQUIRED AT BRACED WALL PANELS



-HOLD DOWN INSTALLED PER HOLD DOWN SCHEDULE THIS SHEET

(D)HOLD DOWN AT MONOLITHIC SLAB

HOLD DOWN SCHEDULE

FASTENERS

(18)16dx2½" LONG NAILS

(26)16dx2½" LONG NAILS

(10)10d NAILS

ALL TREAD ROD

兆" DIA.

%" DIA.

%" DIA.

HOLD DOWN

USF

LTS20B

HTT16

HTT45

SIMPSON

LTTP2

HTT4

HTT5

- A36 ALL THREAD ROD DRILLED AND EPOXIED 6" INTO FOOTING USING SIMPSON "SET"/"ET" OR USP CIA-GEL ADHESIVE.

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34








Designed By: LMR
Checked By:
Issue Date: 9/9/22

Project #: 047-22002










(C)HOLD DOWN AT STEMWALL SLAB



G HOLD DOWN AT FOUNDATION STEM WALL

(A) TYPICAL	HOLD	DOWN	DETAIL

E HOLD DOWN AT CRAWL FOUNDATION

(2) 2x FULL HEIGHT

STUD w/ 10d NAILS

@ 6" O.C. EACH PLY

2x FULL HEIGHT STUDS

w/ 16d NAILS @ 6" O.C.

SHEAR WALL, SEE SCHEDULE AND PLANS FOR LOCATION


HOLD DOWN INSTALLED PER HOLD DOWN SCHEDULE THIS SHEET, SEE PLANS FOR TYPE

A36 ALL THREAD ROD-

SIMPSON CNW1/2 -OR USP CNW12-ZP COUPLER NUT

GROUT CMU SOLID AT ALL THREAD ROD-

AND LOCATION.

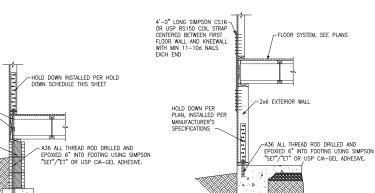

2x FULL HEIGHT

NAILS @ 6" O.C.

STUD w/ 16d

(2)2x FULL HEIGHT-

STUD w/ 10d NAILS @ 6" O.C. EACH PLY



-SHEAR WALL, SEE

-HOLD DOWN INSTALLED PER HOLD DOWN SCHEDULE THIS SHEET, SEE PLANS FOR TYPE AND LOCATION.

B TYPICAL HOLD DOWN DETAIL

SCHEDULE AND PLANS FOR LOCATION

Carolina

North


Details

ઝ

Notes

Wall

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

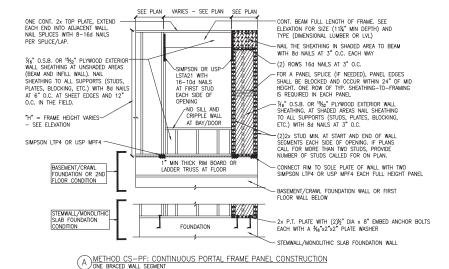


ONE CONT. 2x TOP PLATE, EXTEND EACH END INTO ADJACENT WALL. NAIL SPILCES A-166 NAILS PER SPILCE/LAP. 3/4" O.S.B. OR 19/5" PLYWOOD EXTERIOR WALL SHEATHING AT UNISHADED AREAS (BEAM AND INFILL WALL). NAIL SHEATHING TO ALL SUPPORTS (STUDS, PLATES, BLOCKING, ETC.) WITH 8d NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. IN THE FIELD. "H" = FRAME HEIGHT VARIES — SEE ELEVATION WHERE FULL HEIGHT PANEL WIDTH EXCEEDS 16", PROVIDE ADDITIONAL STUDS AT 16" O.C. NAIL SHEATHING TO ALL STUDS WITH 8d NAILS AT 3" O.C.	SEE PLAN VARIES - SEE PLAN SEE PLAN SIMPSON OR USP LSTAZ1 WITH 16-10d NAILS AT FIRST STUD BACH SIDE OF OPDINIO NO SILL AND CRIPPLE WALL AT BAY/DOOR	CONT. BEAM FULL LENGTH OF FRAME. SEE ELEVATION FOR SIZE (11½" MIN DEPTH) AND TYPE (DIMENSIONAL LUMBER OR LVL) NAIL THE SHEATHING IN SHADED AREA TO BEAM WITH 8d NAILS AT 3" O.C. EACH WAY (2) ROWS 16d NAILS AT 3" O.C. EACH WAY (2) ROWS 16d NAILS AT 3" O.C. EACH WAY (2) ROWS 16d NAILS AT 3" O.C. EACH WAY (2) ROWS 16d NAILS AT 3" O.C. EACH WAY (3) ROWS 16D NAILS AT 3" O.C. EACH WAY (4) ROWS 16D NAILS AT 3" O.C. EACH WAY (5) REQUIRED IN EACH PANEL (7) SOLD OF 190 NAILS AT SIMPLE SHADEN SHAD
BASEMENT/CRAWL FOUNDATION OR 2ND FLOOR CONDITION	1* MIN THICK RIM BOARD OR LADDER TRUSS AT FLOOR	
STEMWALL/MONOLITHIC SLAB FOUNDATION CONDITION	FOUNDATION	-2x P.T. PLATE WITH (2)½" DIA x 8" EMBED ANCHOR BOLTS EACH WITH A ¾6"x2"x2" PLATE WASHER -STEMWALL/MONOLITHIC SLAB FOUNDATION WALL

(B) METHOD CS-PF: CONTINUOUS PORTAL FRAME PANEL CONSTRUCTION TWO BRACED WALL SEGMENTS

BRACED WALL PANEL AND ENGINEERED SHEAR WALL SCHEDULE			
PANEL TYPES	PANEL TYPE	MATERIAL	FASTENERS
WSP	INTERMITTENT WOOD STRUCTURAL PANEL	7/16" OSB	6D OR 8D COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. <u>ENGINEERED ALTERNATIVE</u> : 16 <u>GAGE BY 1.75" LONG</u> STAPLES AT 3" O.C. AT SHEET EDGES AND 6" O.C. AT INTERMEDIATE SUPPORTS
GB(1)	INTERMITTENT GYPSUM BOARD (SHEATHING ONE FACE OF WALL)	1/2" GYPSUM	1.5" LONG GALV. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 7" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.
GB(1)-4	INTERMITTENT GYPSUM BOARD (SHEATHING ONE FACE OF WALL)	1/2" GYPSUM	1.5" LONG GALV. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 4" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.
GB(2)	INTERMITTENT GYPSUM BOARD (SHEATHING BOTH FACES OF WALL)	1/2" GYPSUM	1.5" LONG GALV. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 7" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.
CS-WSP	CONTINUOUS SHEATHED WOOD STRUCTURAL PANEL	7/16" OSB	6D OR 8D COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. <u>ENGINEERED ALTERNATIVE</u> : 16 GAGE BY 1.75" LONG STAPLES AT 3" O.C. AT SHEET EDGES AND 6" O.C. AT INTERMEDIATE SUPPORTS
CS-PF	CONTINUOUS SHEATHED PORTAL FRAME	7/16" OSB	NAILING PER DETAIL
CS-EPF	PORTAL FRAME WITH HOLD DOWNS	7/16" OSB	NAILING PER DETAIL
CS-ESW(1)	ENGINEERED SHEAR WALL, TYPE 1	7/16" OSB	8D COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS
CS-ESW(2)	ENGINEERED SHEAR WALL, TYPE 2	7/16" OSB	8D COMMON NAILS AT 4" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS
CS-ESW(3)	ENGINEERED SHEAR WALL, TYPE 3	7/16" OSB	8D COMMON NAILS AT 3" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS

BRACED WALL PANEL NOTES:

- ALL BRACED WALL PANELS, EXCEPT GB(1) & GB(2), SHALL HAVE 2x BLOCKING BETWEEN WALL STUDS AT ALL HORIZONTAL SHEET EDGES.
- 2. PROVIDE NAILING/BLOCKING ABOVE AND BELOW ALL BRACED WALL PANELS PER KSE BRACED WALL DETAILS.
- SHEATH ALL EXTERIOR WALLS OF THE HOUSE WITH 1/46" O.S.B., OR 15/32" PLYWOOD, FASTENED PER IRC. AT EXTERIOR CORNERS, SHEATHING SHALL BE FASTENED PER KSE BRACED WALL DETAILS. AT INTERIOR WALL INTERSECTIONS, FASTEN STUDS & WALL BRACING PER KSE BRACED WALL DETAILS.
- BRACED WALL PANELS AND ENGINEERED SHEAR WALLS ARE PROVIDED PER IRC. PANEL LENGTHS SHOWN ON PLANS ARE THE MINIMUM LENGTH REQUIRED.

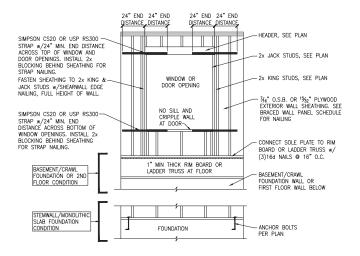


WINDOW OR DOOR REINFORCEMENT IN ENGINEERED SHEAR WALL ONLY REQUIRED WHERE SPECIFIED ON PLANS

JEERING

KRENTOWN, PA 18951
(215) 804-4449

ENGINE

S

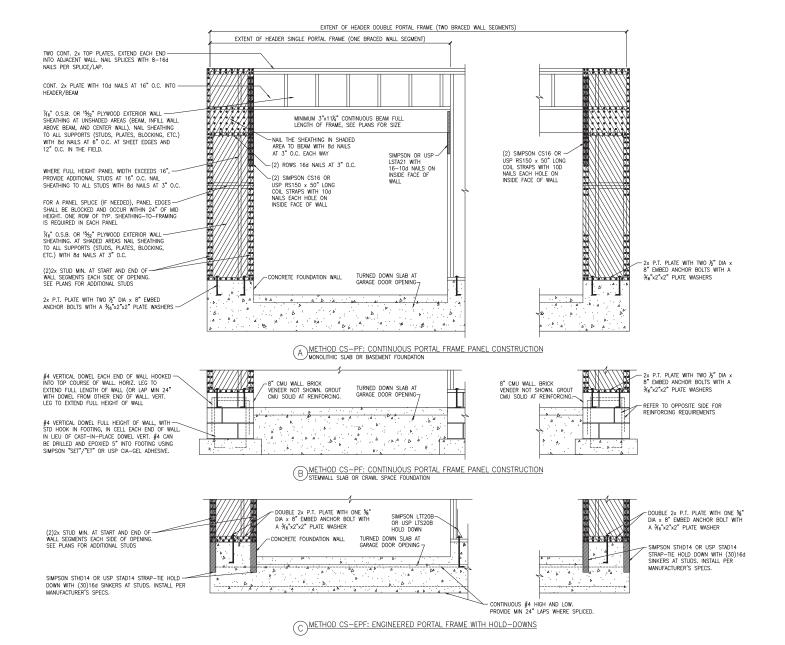



Model Details #20 Blakestone Frame Lot H. Serenity, B326 Blat 115 M.P.H Raleigh, Portal Project #: 047-22002 Designed By: LMR Checked By:

Carolina

North

1/4"=1'-0" @ 22x34

Issue Date: 9/9/22 Re-Issue:



ENGINEERING
E, SUITE 201, QUAKERTOWN, PA 18951
com (215) 804--4449

KSI

(2)2x6 TOP PLATE

HEADER, SEE PLAN

- 7/16" O.S.B. EXTERIOR WALL SHEATHING. SEE BRACED WALL PANEL SCHEDULE FOR NAILING

-2x6 @ 12" O.C. BALLOON FRAMED WALL, SEE PLANS

2x6 JACK STUD. SEE

PLAN FOR QUANTITY - 2x6 KING STUD, SEE PLAN FOR QUANTITY









Project #: 047-22002 Designed By:LMR


Checked By: Issue Date: 9/9/22


Re-Issue: Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

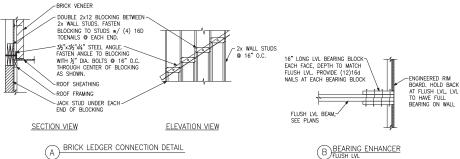






C) I-JOIST LADDER DECESSION AS REQUIRED @ PARALLEL WALLS JOIST LADDER BLOCKING



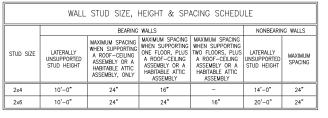

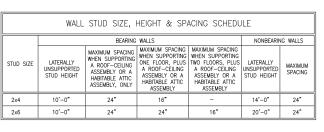





2x6 SOLE PLATE DBALLOON FRAMED WALL DETAIL N.T.S.

WINDOW OPENING

WINDOW

OPFNING

WINDOW

WINDOW OPENING

WINDOW

WINDOW

OPFNING

ENGINEERING

E. SUITE 201, QUAKERTOWN, PA 18951

COM

(215) 804-4449

S



Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

Checked By: Issue Date: 9/9/22 Re-Issue:

Designed By: LMR


Detail

Framing

#20

Project #: 047-22002

Miscellaneous Fram Serenity, Lot #50 B326 Blakestone N 115 M.P.H.



LINE OF OPTIONAL BRICK

-WALL STUD OR GABLE TRUSS TOENAIL RAFTER TO LEDGER WITH (4) 12d NAILS -2x4 LEDGER, FASTEN TO WALL STUDS w/(2) ROWS SIMPSON SDS1/4×31/2" SCREWS @ 16" O.C. -2x4 RAFTER & CEILING JOIST, LAP AND FACE NAIL WITH (4) 12d NAILS -2x4 LEDGER. FASTEN TO WALL OR GABLE TRUSS WITH (2) ROWS 12d NAILS @ 16" O.C.

C EYEBROW ROOF DETAIL STRAIGHT ROOF

A PENT ROOF DETAIL CURVED ROOF 2x4 BLOCKING BETWEEN TRUSSES WITH SIMPSON U24 OR USP JL24 EACH END 8d NAILS AT 6" O.C. -AT 4" O.C. SLOPING L3½"x3½"x¾" BRICK ANGLE WITH HORIZ. PL3x,3x½ PLATES AT 24" O.C. (MIN TWO PER ANGLE. NAIL TO GIRDER 2x4 FRAMING AT 24" O.C. -CANTILEVERED OVER GABLE BRICK VENEER -END TRUSS 2x4 BLOCKING BTWN TRUSS WITH 16d NAILS AT 9" O.C. THROUGH PRE-DRILLED RAFTERS. -SIMPSON LTP4 EVERY 2x6 KICKER AT 6'-0" O.C., WITH--HOLES. 2x6 "T" SCAB. NAIL SCAB TO (5) 10d-KICKER WITH 10d NAILS AT 6"
O.C. KICKER MAY BE OMITTED
WHEN HEIGHT OF GABLE END
TRUSS IS 4'-0" OR LESS. NAILS TYP KV 7/6" OSB AT GABLE END TRUSS, PER SHEAR WALL BELOW 2x WALL STUDS, EDGE NAILING PER SHEAR — WALL SCHEDULE PER SHEAR (2) SIMPSON GBC OR ROOF TRUSSES USP HC520 EACH KICKER AT 24" O.C. WALL ABOVE (6" O.C. AT ROOF GIRDER TRUSS TO NON-SHEAR WALLS) SUPPORT DEAD LOAD OF BRICK, SEE PLAN %6" OSB WALL SHEATHING

2x12 RAFTER WITH

CURVED PROFILE CUT INTO RAFTER

OSB GUSSET, CUT TO-MATCH ROOF PROFILE

FASTEN GUSSET TO FRAMING w/8d NAILS @ 4"

O.C. INTO EACH MEMBER.

2x4 VERTICAL

(E)GABLE END WALL DETAIL

2x4 LEDGER. FASTEN TO

WALL STUDS w/(2) ROWS SIMPSON SDS¼x3½" OR USP WS35 SCREWS ⊕ 16" O.C.

-LINE OF OPTIONAL BRICK

FASTEN RAFTER TO LEDGER WITH SIMPSON H3 OR USP RT3A

-2x4 LEDGER. FASTEN TO WALL STUDS

w/(2) ROWS SIMPSON SDS¼x3½" OR USP WS35 SCREWS @ 16" O.C.

FASTEN VERTICAL TO RAFTER &

CLG. JOIST w/(4) 12d NAILS.

WALL STUDS WITH (2) ROWS

BRICK VENEER, PER ELEVATION

-2x4 LEDGER. FASTEN TO

12d NAILS @ 16" O.C.

-SIMPSON U24-2 OR USP SUH24-2 HANGER

-WALL STUD OR GABLE TRUSS

-WALL SHEATHING

-2x4 VERTICAL

—2x4 CEILING JOIST, LAP WITH VERTICAL

OSB GUSSET, CUT TO MATCH ROOF PROFILE FASTEN GUSSET TO

FRAMING w/8d NAILS @ 4" O.C. INTO EACH MEMBER.

2'-6" MAXIMUM

2x12 RAFTER WITH

CURVED PROFILE CUT INTO RAFTER


ENGINEERING

E. SUITE 201, QUAKERTOWN, PA 18951

COM

(215) 804-4449

S



Carolina

North

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34


Re-Issue:

Issue Date: 9/9/22

Designed By: LMR Checked By:

Raleigh, Project #: 047-22002







Details



FINSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C., SEE FOUNDATION NOTES.

LIVING SPACE

H)THICKENED SLAB

CONCRETE SLAB POURED MONOLITHICALLY WITH FOOTING, SEE PLAN.

"4" GRAVEL FILL OR GROUP 1 CLASSIFIED SOIL

COMPACTED FILL

MONOLITHIC CONCRETE FOOTING, SEE PLAN.

2x STUD WALL w/ P.T. PLATE, SEE PLAN.


STEP VARIES

(aaaaa)

24" MAX

GARAGE SPACE



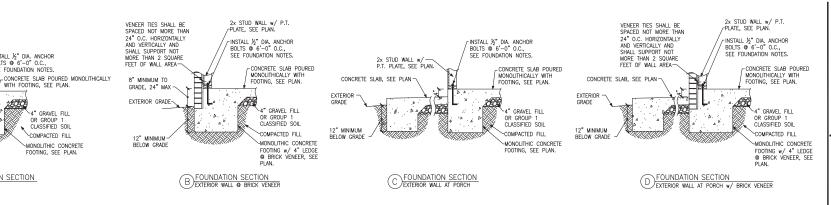

CONCRETE SLAB POURED

4" GRAVEL FILL


OR GROUP 1 CLASSIFIED SOIL

COMPACTED FILL

-MONOLITHIC CONCRETE FOOTING

MONOLITHICALLY WITH FOOTING, SEE PLAN.

G GARAGE DOOR SECTION



A FOUNDATION SECTION EXTERIOR WALL

rINSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C.,

SEE FOUNDATION NOTES.

4" GRAVEL FILL OR GROUP 1

CLASSIFIED SOIL

COMPACTED FILL

-MONOLITHIC CONCRETE

FOOTING, SEE PLAN.

2x STUD WALL w/— P.T. PLATE, SEE PLAN.


8" MINIMUM TO

GRADE, 24" MAX

12" MINIMUM~ BELOW GRADE

EXTERIOR GRADE \





2x STUD WALL w/ P.T. PLATE, SEE PLAN.

-INSTALL ½" DIA. ANCHOR BOLTS ⊕ 6'-0" O.C., SEE FOUNDATION NOTES.

STEP VARIES.

]24" MAX.

FOUNDATION SECTION
EXTERIOR GARAGE WALL @ BRICK VENEER

CONCRETE SLAB POURED

RECESS @ GARAGE DOOR

MONOLITHICALLY WITH FOOTING, SEE PLAN.

4" GRAVEL FILL

OR GROUP 1 CLASSIFIED SOIL

COMPACTED FILL

MONOLITHIC CONCRETE

FOOTING w/ 4" LEDGE BRICK VENEER, SEE



VENEER TIES SHALL BE SPACED NOT MORE THAN

24" O.C. HORIZONTALLY AND VERTICALLY AND SHALL SUPPORT NOT MORE THAN 2 SQUARE FEET OF WALL AREA


8" MINIMUM TO

GRADE, 24" MAX

EXTERIOR GRADE

12" MINIMUM

BELOW GRADE



THICKENED SLAB SECTION (J)INTERIOR BEARING WALL

ENGINEERING

E. SUITE 201, QUAKERTOWN, PA 18951

COM

(215) 804-4449

S









Notes

1/4"=1'-0" @ 22x34

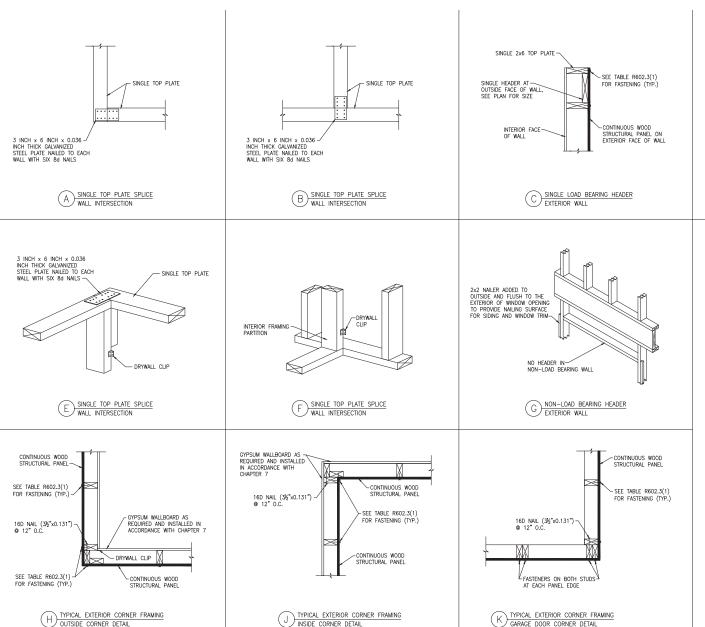

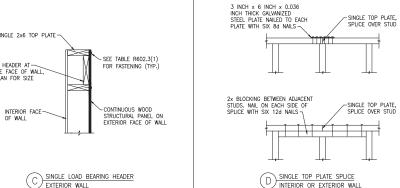

GARAGE DOOR CORNER DETAIL

ADVANCED FRAMING NOTES 1.) EXTERIOR WALLS TO BE 2x6 S.P.F. STUDS @

24" O.C. WITH SINGLE TOP PLATE, TOP PLATE TO BE SPLICED PER NC RESIDENTIAL CODE.

2.) INTERIOR BEARING WALLS TO BE PER NO RESIDENTIAL CODE.

3.) ROOF TRUSSES AND FLOOR JOISTS ARE TO BE STACKED AND CENTERED OVER STUDS WITH A TOLERANCE OF NO MORE THAN 1 INCH. ADDITIONAL STUDS ARE TO BE ADDED WHERE THE ROOF TRUSSES AND FLOOR JOISTS ARE NOT STACKED OVER STUDS WITHIN 1" TOLERANCE.

4.) INTERIOR NON-LOAD BEARING WALLS TO BE 2x4 S.P.F. STUDS @ 24" O.C. WITH SINGLE TOP PLATE, TOP PLATE TO BE SPLICED PER NC RESIDENTIAL CODE.

5.) LOAD-BEARING HEADERS ARE NOT REQUIRED IN INTERIOR OR EXTERIOR NONBEARING WALLS. A SINGLE FLAT 2x MEMBER MAY BE USED AS A HEADER IN INTERIOR OR EXTERIOR NONBEARING WALLS FOR OPENINGS UP TO 8 FEET IN WIDTH IF THE VERTICAL DISTANCE TO THE PARALLEL NAILING SURFACE IS NOT MORE THAN 24 INCHES. FOR SUCH NONBEARING HEADERS, NO CRIPPLES OR BLOCKING ARE REQUIRED ABOVE THE HEADER.