


4-Bedroom Septic Plan  
 Lot #71 – Duncan’s Crossing  
 Harnett County  
 Smith Douglas Homes

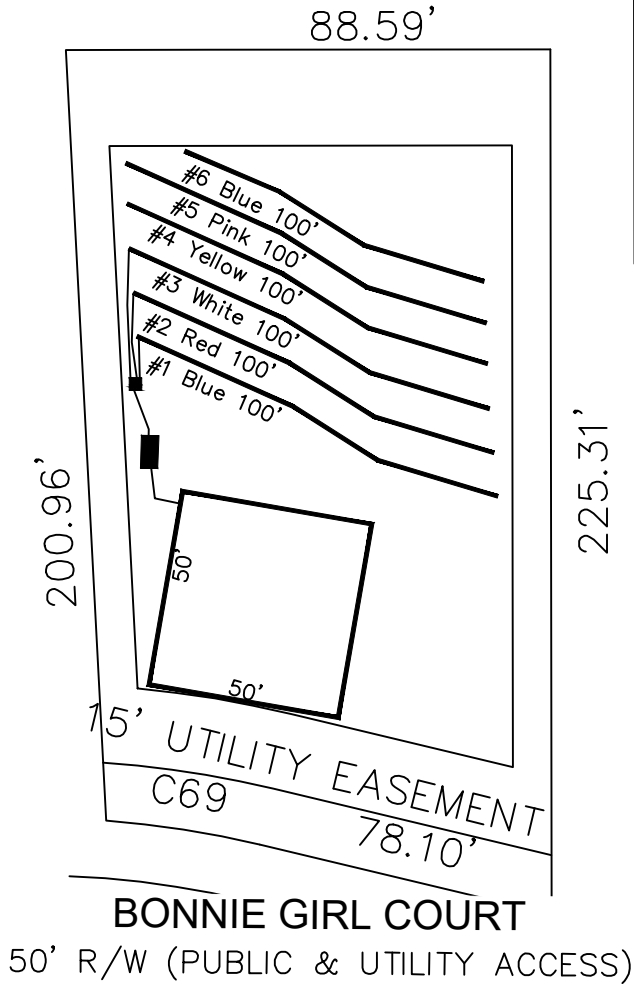

- \*House footprint to be field staked by surveyor and system verified prior to any construction
- \*\*Septic area must not be altered by construction activities.
- \*\*\*No cuts of 2' or greater within within 15' of septic area
- \*\*\*\* Recommend protective barrier around septic field during construction.

71

25,570 SF  
 (0.59 AC)

\*If plumbing is not sufficient a pump tank will be required to septic field.

System: Gravity to D-Box  
 Lines: Lines 1-3 (300')  
 0.4 LTAR  
 24" Max Trench Bottom  
 Accepted Status System  
 Repair: Pressure Manifold  
 Lines: Lines 4-6 (290')  
 0.4 LTAR  
 18" Trench Bottom  
 T&J Panel 50% Reduction system

GRAPHIC SCALE  
 1" = 50'



Adams  
 Soil Consulting  
 919-414-6761  
 Job #1146