

6* TRIM (TYP.) _ 0".FIRST.FLOOR. _ _ ENTRY DETAIL

SCALE: 1/8" = 1'-0"





REAR ELEVATION

NORTH B328-B ELV-1 KINTON RALEIGH

David Weekley Homes

20


Scale:1/8"=1'-0" Rev: 12/14/22 EB

CN/NU/SG Date: 9/30/2020


Block: Lot:

Proj. No.: 3277 Job No.: 0020

SERENITY 65' (IM) 81 WELCOME DR FUQUAY VARINA, NC

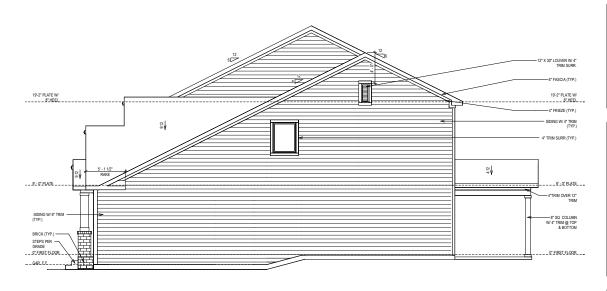

SIDE ELEVATION

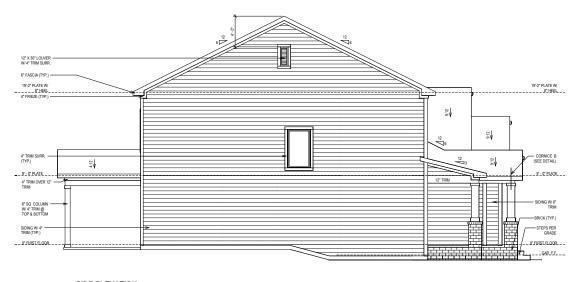

SIDE ELEVATION

Weekley Homes LP. 2021
The measurement, climation, and one up-officiation
whom an one As document are paidment by construction use
only. The stand specification or first intense forcular and
only. The stand specification or first intense stocker way
or which the completed discuss


David Weekley Homes


CNINUISG | Scale:1/8"=1-0"

Date: 9/30/2020 | Rev. 1/21/4/22 EB

20

NORTH
B328-B
ELV-2
KINTON
RALEIGH

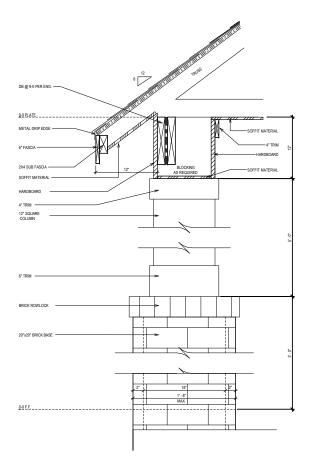





BRACKET DETAIL
SCALE: 1" = 1'-0"

SCALE: 1" = 1'-0"

CORNICE DETAIL "A"

SCALE: 1" = 1'-0"

Week by Homes LP.
 The measurements, dimensions, and other specifies on a nits decreased, we specified to construct the specifies of the first very. The decreased may need to be first of that the construction and the specifies of relatifies construction.

David Weekley Homes Scale:1/8"=1'-0" Rev: 12/14/22 EB

CN/NU/SG Date: 9/30/2020

Block: Lot:

Proj. No.: 3277 Job No.: 0020

SERENITY 65' (IM) 81 WELCOME DR FUQUAY VARINA, NC

20

B328-B ELV-3 KINTON RALEIGH

SHEET INDEX:

- COVER SHEET
- S-0.1 GENERAL STRUCTURAL NOTES
- MONOLITHIC SLAB FOUNDATION PLAN
- SECOND FLOOR FRAMING PLAN
- ROOF FRAMING PLAN S-3
- SD-1 BRACED WALL DETAILS
- SD-2 HOLD DOWN DETAILS
- SD-3 BRACED WALL NOTES & DETAILS
- SD-4 PORTAL FRAME DETAILS
- MISCELLANEOUS FRAMING DETAILS SD-5
- SD-6 MISCELLANEOUS FRAMING DETAILS
- SD-7 MONOLITHIC SLAB FOUNDATION DETAILS
- SD-8
- NOT USED SD-9 SD-10 NOT USED
- NOT USED SD-11
- ADVANCED FRAMING DETAILS & NOTES



1900 AM DRIVE, SUITE 201, QUAKERTOWN, PA 18951 www.kse-eng.com (215) 804-4449

B328 KINTON

SERENITY, LOT #20

RALEIGH, NORTH CAROLINA

THESE DRAWINGS ARE TO BE USED IN CONJUNCTION WITH AND COORDINATED WITH THE ARCHITECTURAL, CIVIL, MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS. THIS COORDINATION IS NOT THE RESPONSIBILITY OF THE RECOMMENDER OF BONUSORD (SER) SHOULD ANY DISCREPANCES BECOME APPARENT, THE CONTRACTOR SHALL NOTIFY KSE ENSINEERING, P.C. BEFORE CONSTRUCTION BEGINS. IT IS THE INTERN OF THE ENSINEER LISTED ON THESE DOCUMENTS HAT THESE DOCUMENTS BE ACCURATE, PROVIDING LICENSE PROFESSIONALS CLEAR INFORMATION. EVERY ATTEMPT HAS BEEN MADE TO PREVENT ERROR. THE BUILDER AND ALL SUBCONTRACTORS ARE REQUIRED TO REVIEW ALL OF THE INFORMATION DIVINITIES TO THE CONTRACTOR OF THE STRUCTURE TO THE COMMENCEMENT OF ANY WORK. THE ENGINEER IS NOT RESPONSIBLE TO RANT PLAN ERRORS, OMISSIONS, OR MISMITERPRETATIONS UNDETECTED AND NOT REPORTED TO THE COMMENCE TO CONSTRUCTION. ALL CONSTRUCTION MUST BE IN ACCORDANCE TO THE INFORMATION FOUND IN TESC DOCUMENTS.

DESIGN SPECIFICATIONS:

DESIGN BUILDING CODE (REFERRED TO HEREIN AS 'THE BUILDING CODE'):

• 2018 NORTH CAROLINA RESIDENTIAL CODE, WALL BRACING PER INTERNATIONAL RESIDENTIAL CODE 2015 EDITION.

- N LIVE LUMDS:
 ** CROOF = 20 PSF (LOAD DURATION FACTOR=1.25)
 ** UNINHABITABLE ATTICS WITH LIMITED STORAGE = 20 PSF (WHERE SPECIFIED ON PLANS)
 ** HABITABLE ATTICS AND ATTICS SERVED WITH FIXED STAIRS = 30 PSF
- FLOOR (SLEEPING AREAS) = 30 PSF
- DECK/BALCONY = 40 PSF STAIRS = 40 PSF

DESIGN DEAD LOADS:

- *ROOF TRUSS = 17 PSF (TC=7, BC=10)

 *FLOOR TRUSS = 15 PSF (TC=10, BC=5)
- *FLOOR JOIST = 10 PSF *STANDARD BRICK = 40 PSF
- · QUEEN ANNE BRICK = 25 PSF

NOTE: STRUCTURAL FRAMING HAS NOT BEEN DESIGNED FOR TILE, GRANITE, MARBLE OR OTHER MATERIALS HEAVIER THAN THE ABOVE LOADING UNLESS SPECIFICALLY NOTED ON PLANS..

DESIGN WIND LOADS:

• ULTIMATE WIND SPEED = 115 MPH

• EXPOSURE CATEGORY = B

ASSUMED SOIL BEARING CAPACITY = 2000 PSF

ASSUMED LATERAL SOIL PRESSURE = 45 PCF

FROST DEPTH = 12" MINIMUM

SEISMIC DESIGN CATEGORY = B

ENGINEERED LUMBER SHALL HAVE THE FOLLOWING MINIMUM DESIGN VALUES:

- * TJI 210 SERIES (SERIES AND SPACING PER PLANS)

 * LSL: E=1,550,000 PSI, F₈=2,325 PSI, F₄=310 PSI, F₆=900 PSI

 * LVL: E=2,000,000 PSI, F₈=2,600 PSI, F₈=285 PSI, F₈=750 PSI

 * PSI: E=2,100,000 PSI, F₈=2,900 PSI, F₉=290 PSI, F₆=625 PSI



David Weekley Homes

Carolina North

Cover Sheet Serenity, Lot B328 Kinton Serenity Raleigh, North Project #: 047-20008

Designed By:JPS Checked By: Issue Date: 1/30/23

#20 Model

Re-Issue: Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34



- THE DESIGN PROFESSIONAL WHOSE SEAL APPEARS ON THESE DRAWINGS IS THE STRUCTURAL ENGINEER OF BONUSORD (SER) FOR THIS PROJECT. THE SER BEARS THE RESPONSIBILITY OF THE PRIMARY STRUCTURAL ELEMENTS AND THE PERFORMANCE OF THIS STRUCTURE. LOO THESE ARTY MAY RENSE, ALTER, OR DELETE ANY STRUCTURAL. NO OTHER PARTY MAY RENSE, ALTER, OR DELETE ANY STRUCTURAL. ASPECTS OF THESE CONSTRUCTION DOCUMENTS WITHOUT WRITEN CONSENT OF KSE ENGINEERING, P.C. OR THE SER, FOR THE CONSERIOR OF THESE CONSTRUCTION DOCUMENTS, THE SER AND KSE ENGINEERING SHALL BE CONSIDERED THE SAME ENTITY. HE STRUCTURE IS ONLY STABLEE IN ITS COMPLETED FORM, THE CONTRACTOR SHALL PROVIDE ALL REQUIRED TEMPORARY BRACING DURING CONSTRUCTION SEQUENCES, METHODS, OR TECHNIQUES IN CONNECTION WITH THE CONSTRUCTION OF THIS STRUCTURE. THE SER WILL NOT BE HELD RESPONSIBLE FOR THE STRUCTURE. THIS PROJECT, THE SER BEARS THE RESPONSIBILITY OF THE PRIMARY
- THE CONTRACTOR'S FAILURE TO CONFORM TO THE CONTRACT

THE CONTRACTOR'S FAILURE TO CONFORM TO THE CONTRACT DOCUMENTS, SHOULD ANY NON-CONFORMITES OCCUR. THE SER DOES NOT CERTIFY DIMENSIONAL ACCURACY OR ARCHITECTURAL LAYOUT INCLUDING ROOF GEOMETRY. THE SER ASSUMES NO LUBBILITY FOR CHANGES MADE TO THESE PLANS BY OTHERS, OR FOR CONSTRUCTION METHODS, OR FOR MAY DEVANTION FROM THE PLANS. THE SER SHALL BE NOTIFIED PRIOR TO CONSTRUCTION IF ANY DISCREPANCIES ARE NOTIFIED PRIOR TO CONSTRUCTION IF ANY DISCREPANCIES ARE NOTIFIED ON THE PLANS. ANY STRUCTURAL ELEMENTS OR DETAILS NOT FULLY DEVELOPED ON THE CONSTRUCTIONS SHALL BE CONSECUENT ON DEVELOPED ON THE CONSTRUCTION DEMANDS SHALL BE CONSIDERED.

- THE CONSTRUCTION DRAWINGS SHALL BE COMPLETED UNDER THE THE CONSTRUCTION DRAWNINGS SHALL BE COMPLETED UNDER THE DIBBOUNTSTON OF A LICENSED PROFESSIONAL ENGINEER. THESE SHOP DRAWNINGS SHALL BE SUBMITTED TO XISE ENDINEERING FOR REVIEW BEFORE ANY CONSTRUCTION BEGINS. THE SHOP DRAWNINGS WILL BE REVIEWED FOR OVERALL COMPLIANCE AS IT RELATES TO THE STRUCTURAL DESIGN OF THIS PROJECT, VERTICATION OF THE SHOP DRAWINGS FOR DIMENSIONS, OR FOR ACTUAL FIELD CONDITIONS, IS NOT THE RESPONSIBILITY OF THE SER OR KSE ENGINEERING, P.C. VERIFICATION OF ASSUMED FIELD CONDITIONS IS NOT THE
- RESPONSIBILITY OF THE SER. THE CONTRACTOR SHALL VERIFY THE FIELD CONDITIONS FOR ACCURACY AND REPORT ANY DISCREPANCIES TO KSE ENGINEERING, P.C. BEFORE CONSTRUCTION BEGINS.
 THE SER IS NOT RESPONSIBLE FOR ANY SECONDARY STRUCTURAL
 ELEMENTS OR NON-STRUCTURAL ELEMENTS, EXCEPT FOR THE
- FLEMENTS SPECIFICALLY NOTED ON THE STRUCTURAL DRAWINGS THIS STRUCTURE AND ALL CONSTRUCTION SHALL CONFORM TO ALL APPLICABLE SECTIONS OF THE BUILDING CODE AND ANY LOCAL CODES OR RESTRICTIONS.
- 9. DO NOT SCALE DRAWINGS. WRITTEN DIMENSIONS TAKE PBONUSEDENCE OVER SCALED DIMENSIONS ALL DIMENSIONS ARE TO EACE OF STUD OR TO EACE OF FRAMING LINLESS OTHERWISE NOTED WATERPROOFING AND FLASHING BY OTHERS

FOUNDATIONS:

- FOUNDATIONS SHALL BE CONSTRUCTED IN ACCORDANCE WITH
- CHAPTER 4 OF THE BUILDING CODE.

 CONTRACTOR IS SOLELY RESPONSIBLE FOR VERIFYING THE SUITABILITY

 OF THE SITE SOIL CONDITIONS AT THE TIME OF CONSTRUCTION. THE BUILDER SHALL FURNISH ANY AND ALL REPORTS BONUSEIVED FROM THE GEOTECHNICAL ENGINEER ON THE STUDY OF THE PROPOSED SITE TO THE DESIGNER, STRUCTURAL ENGINEER, AND GENERAL CONTRACTOR
- GENERAL CONTRACTOR.

 MAXIMUM DEPTH OF UNBALANCED FILL AGAINST MASONRY WALLS TO BE AS SPECIFIED IN THE BUILDING CODE.

 THE SER HAS NOT PERFORMED A SUBSURFACE INVESTIGATION.
- VERIFICATION OF THE ASSUMED VALUE IS THE RESPONSIBILITY OF THE OWNER OR THE CONTRACTOR. SHOULD ANY ADVERSE SOIL CONDITION BE ENCOUNTERED, THE SER MUST BE CONTACTED BEFORE DEPORTED.
- THE BOTTOM OF ALL FOOTINGS SHALL EXTEND BELOW THE FROST LINE FOR THE REGION IN WHICH THE STRUCTURE IS TO BE CONSTRUCTED, BUT NOT LESS THAN A MINIMUM OF 12" BELOW GRADE. ALL FOOTINGS TO HAVE A MINIMUM PROJECTION OF 2" ON EACH SIDE OF FOUNDATION WALLS, MAXIMUM FOOTING PROJECTION SHALL NOT EXCEED THE THICKNESS OF THE FOOTING.
 WOOD SILL PLATES SHALL BE ANCHORED TO THE FOUNDATION WITH
- 16" ANCHOR BOLTS WITH MINIMUM 7" EMBEDMENT, SPACED A MAXIMUM OF 6'-0" O.C. INSTALL MINIMUM 2 ANCHOR BOLTS PER SECTION, 12" MAXIMUM FROM CORNERS. ½" DIAMETER x 8" LONG SIMPSON TITEN HD OR USP SCREW-BOLT+ SCREWS MAY BE SUBSTITUTED ON A 1 FOR 1 BASIS FOR CONCRETE FOUNDATIONS ONLY.

 ANY FILL SHALL BE PLACED UNDER THE DIBONUSTION OR
- BONUSOMMENDATION OF A LICENSED PROFESSIONAL ENGINEER, THE RESULTING SOIL SHALL BE COMPACTED TO A MINIMUM OF 95% MAXIMUM DRY DENSITY
- EXCAVATIONS OF FOOTINGS SHALL BE LINED TEMPORARILY WITH A 6
 MIL POLYETHYLENE MEMBRANE IF PLACEMENT OF CONCRETE DOES NOT OCCUR WITHIN 24 HOURS OF EXCAVATION. NO CONCRETE SHALL BE PLACED AGAINST ANY SUBGRADE CONTAINING
- WATER, ICE, FROST, OR LOOSE MATERIAL.

 PROVIDE FOUNDATION WATERPROOFING AND DRAIN WITH POSITIVE SLOPE TO OUTLET AS REQUIRED BY SITE CONDITIONS (SEE
- ARCHITECTURAL PLANS AND DETAILS).
 NONE OF THE FOUNDATION DESIGNS IN THESE DOCUMENTS ARE SUITABLE FOR INSTALLATION IN SHRINK/SWELL CONDITIONS, REFER TO
- GEOTECHNICAL ENGINEER FOR APPROPRIATE DESIGN.
 LOTS SHALL BE GRADED TO DRAIN SURFACE WATER AWAY FROM
 FOUNDATION WALLS. THE GRADE SHALL FALL A MINIMUM OF 6 INCHES WITHIN THE FIRST TEN FEET.
- WITHIN THE FIRST TEN FEET.
 CRAWL SPACE TO BE GRADED LEVEL AND CLEAR OF ALL DEBRIS.
 PROVIDE MINIMUM 6 MIL APPROVED VAPOR BARRIER. ALL JOINTS TO
 BE LAPPED MINIMUM 12" AND SEALED.

CONCRETE & REINFORCING

- CONCRETE DESIGN BASED ON ACI 318 AND ACI 318.1 OR ACI 332.
 CONCRETE SHALL HAVE A NORMAL WEIGHT AGGREGATE AND A MINIMUM
 COMPRESSIVE STRENGTH (f'c) = 3,000 PSI MINIMUM AT 28 DAYS PER CODE (VARIES W/ WEATHER), UNLESS OTHERWISE NOTED ON THE PLAN. CONCRETE SHALL BE PROPORTIONED, MIXED, AND PLACED IN
- ACCORDANCE WITH THE LATEST EDITIONS OF ACI 318: "BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE" AND ACI 301 "SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS"
- AIR ENTRAINED CONCRETE MUST BE USED FOR ALL STRUCTURAL ELEMENTS EXPOSED TO FREEZE/THAW CYCLES AND DEICING CHEMICALS. ARE ENTRAINMENT AMOUNTS (IN PERCENT) SHALL BE WITHIN -1% TO +2% OF 5% FOR FOOTINGS AND EXTERIOR SLABS.

 NO ADMIXTURES SHALL BE ADDED TO ANY STRUCTURAL CONCRETE WITHOUT WRITTEN PERMISSION OF THE SER. WATER ADDED TO
- CONCRETE ON SITE SHALL NOT EXCEED THAT ALLOWED BY THE MIX CONCRETE SLABS-ON-GRADE SHALL BE CONSTRUCTED IN ACCORDANCE
- WITH ACI 302.1R: "GUIDE FOR CONCRETE SLAB AND SLAB CONSTRUCTION" CONTROL OR SAW CUT JOINTS (CUT OR TOOLED) SHALL BE SPACED IN
- INTERIOR SLABS-ON-GRADE AT A MAXIMUM OF 15'-0" O.C. AND IN EXTERIOR SLABS-ON-GRADE AT A MAXIMUM OF 10'-0" UNLESS OTHERWISE NOTED, CARE SHALL BE TAKEN TO AVOID RE-ENTRANT CORNERS
- CONTROL OR SAW CUT JOINTS SHALL BE PRODUCED USING CONVENTIONAL CUT OR TOOLED PROCESSES WITHIN 4 TO 12 HOURS AFTER THE SLAB HAS BEEN FINISHED. REINFORCING STEEL MAY EXTEND THROUGH A SAW CUT JOINT
- ALL WELDED WIRE FABRIC (W.W.F.) FOR CONCRETE SLABS—ON—GRADE SHALL BE PLACED AT MID—DEPTH OF SLAB. THE W.W.F. SHALL BE SECURELY SUPPORTED DURING THE CONCRETE POUR, FIBROUS CONCRETE REINFORCEMENT, OR POLYPROPYLENE FIRERS MAY BE LISED. CONCRETE REINFORCEMENT, OR POLYPROPYLENE FIBERS MAY BE USED IN LIEU OF WW.F. APPLICATION OF POLYPROPYLENE FIBERS PER CUBIC YARD OF CONCRETE SHALL BE PER MANUFACTURER AND COMPLY WITH ASTM C1116, ANY LOCAL BUILDING CODE REQUIREMENTS AND SHALL MEET OR EXCEED CURRENT INDUSTRY STANDARD.
- POLYPROPYLENE REINFORCING TO BE 100% VIRGIN, CONTAINING NO REPROCESSED OLEFIN MATERIALS AND SPECIFICALLY MANUFACTURED FOR USE AS CONCRETE SECONDARY REINFORCEMENT. 11. STEEL REINFORCING BARS SHALL BE NEW BILLET STEEL CONFORMING
- TO ASTM A615, GRADE 60. 12. DETAILING, FABRICATION, AND PLACEMENT OF REINFORCING STEEL SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF ACI 315: "MANUAL
- OF STANDARD PRACTICE FOR DETAILING CONCRETE STRUCTURES". HORIZONTAL FOOTING AND WALL REINFORCEMENT SHALL BE
- CONTINUOUS AND SHALL HAVE 90° BENDS, OR CORNER BARS WITH THE SAME SIZE/SPACING AS THE HORIZONTAL REINFORCEMENT. 14. PROVIDE REINFORCEMENT LAP AS NOTED BELOW, UNLESS NOTED
- OTHERWISE: #4 BARS 30" LENGTH
- #5 BARS 38" LENGTH #6 BARS 45" LENGTH WHERE REINFORCING DOWELS ARE REQUIRED. THEY SHALL BE 10. WHERE REINFORCING DOWELS ARE REQUIRED, HEET SHALL SEED OF THE VERTICAL REINFORCEMENT. THE DOWEL SHALL EXTEND 50 BAR DIAMETERS VERTICALLY AND 20 BAR DIAMETERS INTO THE FOOTING. SEE KSE FOUNDATION DETAILS.

 16. WHERE FOOTING BOTTOMS ARE TO BE STEPPED AT SLOPING GRADE
- CONDITIONS PROVIDE CONTINUOUS REINFORCING WITH 7 BARS (TO MATCH FOOTING REINFORCING) AS REQUIRED.
- 17. BAR SUPPORT ACCESSORIES SHALL BE PROVIDED IN ACCORDANCE WITH THE LATEST ACL MANUAL OF STANDARD PRACTICE FOR DETAILING REINFORCED CONCRETE STRUCTURES, EXCEPT THAT REINFORCING SHALL BE CHAIRED ON THE BOTTOM AND/OR THE SIDES ON BOLSTERS SPACED NOT MORE THAN 4 FEET ON CENTER NO ROCKS CMIL CLAY
- SPACED NOT MORE HAM 4 FEET ON CENTER. NO ROCKS, CMU, CLAY TILE, OR BRICK SHALL BE USED TO SUPPORT REINFORCING. FOR GRADE SUPPORTED SLABS, SLAB REINFORCING SHALL BE HELD IN PLACE BY BAR SUPPORTS AND ACCESSORIES AS DESCRIBED IN THE CRSI MANUAL OF STANDARD PRACTICE, BAR SUPPORTS SHALL BE SPACED A MAXIMUM OF 4'-0" O.C. BOTH WAYS IN STRAIGHT LINES ON

MASONRY

- ALL MASONRY SHALL CONFORM TO ASTM C-90, F'm=1500 PSI, ALL BRICK SHALL CONFORM TO ASTM C-216, F'm=1500 PSI. ALL MORTAR SHALL BE TYPE 'S' (TYPE 'M' BELOW GRADE) AND CONFORM TO ASTM C-270. COARSE GROUT SHALL CONFORM TO ASTM C-476 WITH A MAXIMUM AGGREGATE SIZE OF 36" AND A MINIMUM COMPRESSIVE STRENGTH OF 2,000
- ALL MASONRY WORK SHALL BE IN ACCORDANCE WITH "BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES" ACI 530/ASCE 5/TMS 402 AND "SPECIFICATIONS FOR MASONRY STRUCTURES" ACI 530.1/ ASCE 6/TMS 602
- THE UNSUPPORTED HEIGHT OF SOLID MASONRY PIERS SHALL NOT EXCEED TEN TIMES THEIR LEAST DIMENSION, UNFILLED HOLLOW PIERS MAY BE USED IF THE UNSUPPORTED HEIGHT IS NOT MORE THAN FOUR TIMES THEIR LEAST DIMENSION
- FACH CRAWL SPACE PIER SHALL BEAR IN THE MIDDLE THIRD OF ITS RESPECTIVE FOOTING AND EACH GIRDER SHALL BEAR IN THE MIDDLE THIRD OF THE PIERS. PILASTERS TO BE BONDED TO PERIMETER FOUNDATION WALL
- FOUNDATION WALL.
 TOP COURSE OF MASONRY SHALL BE GROUTED SOLID.
 HORIZONTAL WALL JOINT REINFORCEMENT SHALL BE STANDARD 9 GAGE
 GALVANIZED LADDER OR TRUSS TYPE SPACED AT 16° O.C., UNILESS SHOWN OTHERWISE ON THE DRAWINGS.
- SPLICED WIRE REINFORCEMENT SHALL BE LAPPED AT LEAST 6" AND CONTAIN AT LEAST ONE CROSS WIRE OF EACH PIECE OF REINFORCEMENT WITHIN THE 6". LAP WITH STANDARD 'T' AND 'L'

WOOD FRAMING:

- SOLID SAWN WOOD FRAMING MEMBERS SHALL CONFORM TO THE SPECIFICATIONS LISTED IN THE LATEST EDITION OF THE "NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION* (NDS) LINEESS THERWISE NOTED, ALL WOOD FRAMING MEMBERS ARE DESIGNED TO
- SPRUCE-PINE-FIR (SPE) WITH THE FOLLOWING MINIMUM DESIGN
- VALUES: E=1,400,000 PSI, F_b=875 PSI, F_v=135 PSI
- 1.1. FRAMING: SPF #2.
- 1.2. PLATES: SPF #2. 1.3. STUDS: SPF STUD GRADE
- ALL LUMBER EXPOSED TO WEATHER OR IN CONTACT WITH CONCRETE SHALL BE PRESERVATIVE TREATED SOUTHERN YELLOW PINE #2 OR
- ANCHOR SILL PLATES IN ACCORDANCE W/ GENERAL STRUCTURAL NOTES ALL BEAMS SPECIFIED ARE MINIMUM SIZES ONLY. LARGER MEMBERS MAY BE SUBSTITUTED AS NEEDED FOR EASE OF CONSTRUCTION. NAILS SHALL BE COMMON WIRE NAILS UNLESS OTHERWISE NOTED.
- BOLT HOLES AND LEAD HOLES FOR LAG SCREWS SHALL BE IN ACCORDANCE WITH NDS SPECIFICATIONS
- INDIVIDUAL STUDS FORMING A COLUMN SHALL BE ATTACHED WITH (2) ROWS 10d NAILS @ 6" O.C. STAGGERED, THE STUD COLUMN SHALL BE FULLY BLOCKED AT ALL FLOOR LEVELS TO ENSURE PROPER LOAD TRANSFER. WALL SHEATHING SHALL BE NAILED TO EDGE OF EACH STUD. FACE NAIL ALL MULTI-PLY BEAMS AND HEADERS WITH (2) ROWS 16d
- COMMON NAILS @ 16" O.C., STAGGERED, OR PER MANUFACTURER'S SPECIFICATIONS FOR ENGINEERED LUMBER. APPLY NAILING FROM BOTH FACES FOR (3) OR MORE PLIES.
- FASTEN 4-PLY BEAMS WITH (1) 1/2" DIAMETER THROUGH BOLT w/ NUT WASHERS AT 12" O.C. STAGGERED TOP AND BOTTOM, 16" MINIMUM EDGE DISTANCE, (UNLESS OTHERWISE NOTED)
- ALL BEAMS AND HEADERS SHALL HAVE (1)2x JACK STUD & (1)2x KING STUD UNLESS OTHERWISE NOTED, THE NUMBER OF STUDS INDICATED ON PLANS ARE THE TOTAL NUMBER OF JACK STUDS REQUIRED, UNLESS
- PROVIDE KING STUDS AT EACH END OF HEADERS AS NOTED BELOW. 16" O.C. STUD SPACING: (1) STUD UP TO 3' OPENING 24" O.C. STUD SPACING: (1) STUD UP TO 4' OPENING (2) STUDS UP TO 4' OPENING (2) STUDS UP TO 8' OPENING STUDS UP TO 8' OPENING (3) STUDS UP TO 12' OPENING (5) STUDS UP TO 12' OPENING (4) STUDS UP TO 16' OPENING (6) STUDS UP TO 16' OPENING
 ALL BEAMS TO BE CONTINUOUSLY SUPPORTED LATERALLY AND SHALL
- BEAR FULL WIDTH ON THE SUPPORTING WALLS OR COLUMNS INDICATED
- BENF FOLK WIDTH ON THE SUPPORTING WALLS OF COLOMISS MOUNTED
 WITH A MINIOUN OF TWO STUDES, ONLESS OTHERWISE NOTED. ALL BEAM
 SPLICES SHALL OCCUR OVER SUPPORTS.

 13. SOLID BLOCKING TO BE PROMIDED AT ALL POINT LOADS THROUGH FLOOR
 LEVELS TO THE FOUNDATION OR TO OTHER STRUCTURAL COMPONENTS. 14. ALL LUMBER SPECIFIED ON DRAWINGS IS INTENDED FOR DRY USE ONLY
- (MOISTURE CONTENT <19%) UNLESS OTHERWISE NOTED.
 ALL WATERPROOFING AND FIRE SAFETY SYSTEMS ARE TH RESPONSIBILITY OF THE CONTRACTOR AND ARE TO BE DESIGNED AND DETAILED BY OTHERS
- DETAILED BY OTHERS.
 ANY WOOD FRAME INTERIOR BEARING WALL STUDS THAT HAVE HOLES IN THE CENTER OF THE STUD UP TO 1" DIAMETER SHALL HAVE STUD PROTECTION SHIELDS. ALL HOLES OVER 1" IN DIAMETER FOR PLUMBING LINES, ETC. SHALL BE REPAIRED WITH SIMPSON HSS2 OR USP STS1 STUD SHOES, TYPICAL, UNLESS OTHERWISE NOTED.
- BEARING WALLS SHALL BE SHEATHED ON NOT LESS THAN ONE SIDE WITH OSB OR GYPSUM BOARD. BRIDGING SHALL BE INSTALLED NOT GREATER THAN 4 FEET APART MEASURED VERTICALLY FROM EITHER END OF THE STUD IN LIEU OF SHEATHING.

EXTERIOR WOOD FRAMED DECKS:

- DECKS ARE TO BE FRAMED IN ACCORDANCE WITH APPLICABLE BUILDING CODES AND AS REFERENCED ON THE STRUCTURAL PLANS. EITHER THROUGH CODE REFERENCES OR CONSTRUCTION DETAILS.
 PRESERVATIVE TREATED WOOD FRAMING TO BE SOUTHERN YELLOW
- PINE #2 OR BETTER. GUARD RAILS AND LATERAL BRACING IS REQUIRED AT DECKS. DESIGN BY
- PROVIDE DECK LATERAL LOAD CONNECTIONS PER BUILDING CODE

RAFTER FRAMED ROOF CONSTRUCTION:

- PROVIDE 2x4x4"-0" RAFTER TIES AT 50" O.C.
 RAFTERS SHALL BE SUPPORTED BY PURLINS AND PURLIN BRACES
 AS SHOWN ON THE PLAN. PURLIN BRACES SHALL NOT BEAR ON ANY CELLING JOIST STRONGRACK OR HEADER LINEESS SPECIFICALLY SHOWN ON PLAN. RAFTERS MAY BE SPLICED AT PURLIN LOCATIONS.
 CEILING JOISTS SHALL HAVE LATERAL SUPPORT W/ 1x4 FLAT
- BRACING ON TOP FOCE OF JOIST AT LOOSE JOIST FNDS (WHERE JOISTS NOT FASTENED TO RAFTERS) OR FULL DEPTH BLOCKING. FASTEN END OF BRACING TO RAFTER OR GABLE END FRAMING.
- FASTEN RAFTER AND CEILING JOIST WITH (6) 12d NAILS UNLESS OTHERWISE NOTED. PROVIDE VERTICAL 2x6 STRONGBACKS AT CEILING JOISTS @ 8'-0"
- O.C. TIE STRONGBACK ENDS TO GABLE STUDS OR RAFTERS WHERE POSSIBLE. PROVIDE BLOCKING BETWEEN TOP PLATES AND STRONGBACKS. PROVIDE 2x4 FLAT FASTENED TO EACH JOIST WITH (2) 124 NAUS FASTEN STRONGRACK TO 2VA FLAT WITH 124 NAUS 12" O.C. AND FASTENED TO EACH JOIST WITH (1) 12d TOENAIL.

WOOD TRUSSES (FLOOR & ROOF):

- THE WOOD TRUSS MANUFACTURER/FABRICATOR IS RESPONSIBLE FOR THE DESIGN OF THE WOOD TRUSSES. SUBMIT SEALED SHOP DRAWINGS AND SUPPORTING CALCULATIONS TO THE SER FOR REVIEW PRIOR TO FABRICATION. THE SER SHALL HAVE A MINIMUM OF (5) DAYS FOR REVIEW. THE REVIEW BY THE SER SHALL BE FOR OVERALL COMPLIANCE OF THE DESIGN DOCUMENTS. THE SER SHALL ASSUME NO RESPONSIBILITY FOR THE CORBONUSTNESS OF THE STRUCTURAL DESIGN FOR THE WOOD TRUSSES.
- THE WOOD TRUSSES SHALL BE DESIGNED FOR ALL REQUIRED LOADINGS AS SPECIFIED IN THE LOCAL BUILDING CODE THE ASCE STANDARD. MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES. (ASCE 7), AND THE LOADING REQUIREMENTS SHOWN ON THESE SPECIFICATIONS. THE TRUSS DRAWINGS SHALL BE COORDINATED WITH ALL OTHER CONSTRUCTION DOCUMENTS AND PROVISIONS PROVIDED FOR LOADS SHOWN ON THESE DRAWINGS INCLUDING BUT NOT LIMITED TO HVAC FOLIPMENT, PIPING, AND ARCHITECTURAL FIXTURES ATTACHED TO THE TRUSSES
- THE TRUSSES SHALL BE DESIGNED, FABRICATED, AND EBONUSTED IN ACCORDANCE WITH THE LATEST EDITION OF THE ANSI/TPI 1: "NATIONAL PROPERTY OF THE ANSI/T DESIGN STANDARD FOR METAL PLATE CONNECTED WOOD TRUSS CONSTRUCTION"
- THE TRUSS MANUFACTURER SHALL PROVIDE ADEQUATE BRACING INFORMATION IN ACCORDANCE WITH "BUILDING COMPONENT SAFETY INFORMATION GUIDE TO GOOD PRACTICE FOR HANDLING, INSTALLING, RESTRAINING & BRACING OF METAL PLATE CONNECTED WOOD TRUSSES' (BCSI) THIS BRACING BOTH TEMPORARY AND PERMANENT SHALL BE SHOWN ON THE SHOP DRAWINGS ALSO, THE SHOP DRAWINGS SHALL SHOW THE REQUIRED ATTACHMENTS FOR THE TRUSSES.

THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING TEMPORARY BRACING AND SHORING FOR THE FLOOR AND ROOF TRUSSES AS REQUIRED DURING CONSTRUCTION. AT A MINIMUM, CONTRACTOR SHALL FOLLOW THE REQUIREMENTS OF THE LATEST BOST. THE CONTRACTOR SHALL FOLLOW THE CROWNER OF THE LATEST BOST. THE CONTRACTOR SHALL KEEP A COPY OF THE BCSI SUMMARY SHEETS ON SITE.

- THE CONTRACTOR IS RESPONSIBLE FOR INSTALLING ALL PERMANENT THE CONTROLLOR RESPONSIBLE FOR INSTALLAR ALL PERMANENT TRUSS BRACING SHOWN IN THE STRUCTURAL DRAWINGS AND IN THE TRUSS DESIGNS. ALL CONTINUOUS LATERAL BRACING OF WEBS REQUIRES BRACES, REFET TO BCSI SUMMARY SHEET BS FOR TYPES OF DIAGONAL BRACES TO PROVIDE AT EACH CONTINUOUS LATERAL BRACE LINE, SUCH BRUCES TO PROVIDE AT BUSH CONTINUOUS STREETS PARKE LINE. SO, DIGGONAL BRACES SHALL NOT BE SPACED MORE THAN 20 FEET O.C. DIGGONAL BRACES SHALL BE FASTEND TO EACH TRUSK WEB WITH MINIMUM OF TWO TO FACE HAILS. WHERE CONTINUOUS LATERAL BRACING CANNOT BE INSTALLED, DUE TO A MINIMUM OF THREE ADJACENT TRUSSES NOT BEING IDENTICAL, THE CONTINGATION SHALL COORDINATE WITH THE TRUSS SPECIALTY ENGINEER/MANUFACTURER TO DETERMINE WHAT TYPE OF ALTERNATE BRACE (I.E., T OR L BRACE, ETC.) IS REQUIRED
- ANY CHORDS OR TRUSS WERS SHOWN ON THESE DRAWINGS HAVE REEN SHOWN AS A REFERENCE ONLY. THE FINAL DESIGN OF THE TRUSSES SHALL BE PER THE MANUFACTURER.
 TRUSS LAYOUT AND PLACEMENT BY MANUFACTURER TO COINCIDE WITH
- THE SUPPORT LOCATIONS SHOWN ON THE SEALED STRUCTURAL DRAWINGS. TRUSS PROFILES TO BE SEALED BY THE TRUSS MANUFACTURER. TRUSS PLANS TO BE COORDINATED WITH THE SEALED STRUCTURAL DRAWINGS.
- TRUSS MANUFACTURER TO PROVIDE REQUIRED UPLIFT CONNECTORS FOR ALL TRUSSES
- PROVIDE SIMPSON H2.5A. USP RT7 OR EQUIVALENT AT EACH TRUSS TO TOP PLATE CONNECTION, UNLESS OTHERWISE NOTED.

- WOOD STRUCTURAL PANELS:

 1. FABRICATION AND PLACEMENT OF STRUCTURAL WOOD SHEATHING SHALL BE IN ACCORDANCE WITH THE APA DESIGN/CONSTRUCTION GUIDE "RESIDENTIAL AND COMMERCIAL," AND ALL OTHER APPLICABLE APA STANDARDS
- STRUCTURALLY REQUIRED WOOD SHEATHING SHALL BEAR THE
- MARK OF THE APA.

 WOOD WALL SHATHING SHALL COMPLY WITH THE REQUIREMENTS OF LOCAL BUILDING CODES FOR THE APPROPRIATE STATE AS INDICATED ON THESE DRAWINGS. REFER TO WALL BRACING NOTES IN PLAN SET FOR MORE INFORMATION. EXTERIOR WALLS TO BE FULLY SHEATHED LISING 76" OSR MINIMIM AT RRACED WALL PANELS PROVIDE BLOCKING AT ALL SHEET EDGES NOT FALLING ON STUDS OR
- PLATES,
 ROOF SHEATHING SHALL BE APA RATED SHEATHING EXPOSURE 1 OR 2. ROOF SHEATHING SHALL BE CONTINUOUS OVER TWO SUPPORTS MINIMUM AND ATTACHED TO ITS SUPPORTING ROOF FRAMING WITH NOT THE PROPERTY OF THE PLANS. SHEATHING SHALL FIELD UNLESS OTHERWISE NOTED ON THE PLANS. SHEATHING SHALL BE APPLIED WITH THE LONG DIBONLISTION PERPENDICULAR TO BE APPLIEU WITH THE LONG DISONOSTION PER-REDUCULAR TO FRAMING, SHEATHING SHALL HAVE A SPAN RATING CONSISTENT WITH THE FRAMING SPACING. PROVIDE SUITABLE EDGE SUPPORT BY USE OF PLYWOOD CLIPS OR LUMBER BLOCKING UNLESS OTHERWISE NOTED. PANEL END JOINTS SHALL OCCUR OVER FRAMING. ROOF
- SHEATHING TO BE 36 OSB MINIMUM.
 WOOD FLOOR SHEATHING SHALL BE APA RATED SHEATHING EXPOSURE 1 OR 2. ATTACH SHEATHING TO ITS SUPPORTING FRAMING WITH (1) 104 NAIL AT 6" O.C. AT PANEL EDGES AND AT 12" O.C. IN PANEL FIELD UNLESS OTHERWISE NOTED ON THE PLANS. SHEATHING SHALL BE APPLIED PERPENDICULAR TO FRAMING SHEATHING SHALL HAVE A SPAN RATING CONSISTENT WITH THE SHEATHING SHALL HAVE A SHAN RATING CONSISTENT WITH THE FRAMING SPACING. PROVIDE SUITABLE EDGE SUPPORT BY USE OF T&G PLYWOOD OR LUMBER BLOCKING UNLESS OTHERWISE NOTED. PANEL END JOINTS SHALL OCCUR OVER FRAMING.
- SHEATHING SHALL HAVE A %" GAP AT PANEL ENDS AND EDGES AS BONUSOMMENDED IN ACCORDANCE WITH THE APA

STRUCTURAL FIBERBOARD PANELS

- STRUCTURAL FIBERBOARD SHEATHING SHALL ONLY BE USED WHERE SPECIFICALLY NOTED ON THE STRUCTURAL PLANS. FABRICATION AND PLACEMENT OF STRUCTURAL FIBERBOARD SHEATHING SHALL BE IN ACCORDANCE WITH THE APPLICABLE AFA STANDARDS
- FIBERBOARD WALL SHEATHING SHALL COMPLY WITH THE REQUIREMENTS OF LOCAL BUILDING CODES FOR THE APPROPRIATE STATE AS INDICATED ON THESE DRAWINGS. REFER TO WALL BRACING NOTES IN PLAN SET FOR MORE INFORMATION
- SHEATHING SHALL HAVE A 1/8" GAP AT PANEL ENDS AND EDGES AS BONUSOMMENDED IN ACCORDANCE WITH THE AFA.

- STRUCTURAL STEEL:

 1. STRUCTURAL STEEL SHALL BE FABRICATED AND EBONUSTED IN ACCORDANCE WITH THE AMERICAN INSTITUTE OF STEEL CONSTRUCTION "CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES" AND OF THE MANUAL OF STEEL CONSTRUCTION "LOAD RESISTANCE FACTOR DESIGN" LATEST EDITIONS.
- ALL STEEL SHALL HAVE A MINIMUM YIELD STRESS (F.) OF 50 KSI UNLESS OTHERWISE NOTED.
 WELDING SHALL CONFORM TO THE LATEST EDITION OF THE
- AMERICAN WELDING SOCIETY'S STRUCTURAL WELDING CODE AWA DI.1. ELECTRODES FOR SHOP AND FIELDING WELDING SHALL BE CLASS F70XX. ALL WELDING SHALL BE PERFORMED BY A CERTIFIED WELDER PER THE ABOVE STANDARDS.


 ALL STEEL BEAMS TO BE SUPPORTED AT EACH END WITH A
- MINIMUM BEARING LENGTH OF 38" AND FULL FLANGE WIDTH UNLESS OTHERWISE NOTED. BEAMS MUST BE ATTACHED AT EACH END WITH A MINIMUM OF FOUR 16d NAILS OR (2) 1/2" x 4" LAG SCREWS
- UNLESS OTHERWISE NOTED.

 INSTALL 2x WOOD PLATE ON TOP OF STEEL BEAMS, RIPPED TO MATCH BEAM WIDTH, FASTEN PLATE TO BEAM w/ HILTI X-DNI 52 P8 PINS AT 12" O.C. STAGGERED OR 1/2" DIAMETER BOLTS AT 24"

MECHANICAL FASTENERS:

- ALL METAL HARDWARE AND FASTENERS TO BE SIMPSON STRONG-TIE OR APPROVED EQUIVALENT. ALL HARDWARE AND FASTENERS IN CONTACT WITH PRESERVATIVE PRESSURE TREATED LUMBER SHALL BE HOT DIPPED GALVANIZED IN ACCORDANCE WITH ASTM A 153, G-185,
- ACCUPOANCE WITH ASIM A 133, G-183.

 MANY OF THE NEW PRESSURE TREATED WOODS USE CHEMICALS
 THAT ARE CORROSIVE TO STEEL. IT IS THE CONTRACTOR'S
 RESPONSIBILITY TO VERIFY THE TYPE OF WOOD TREATMENT AND SELECT APPROPRIATE CONNECTORS THAT WILL RESIST THE APPLICABLE CORROSIVE CHEMICALS.



SPAN	LINTEL SIZE	END BEARING		
UP TO 3'-0*	P TO 3'-0" 3½"x3½"x½"			
UP TO 6'-3"	5"x3½"x¾6" L.L.V.	8"		
UP TO 9'-6"	6"x3½"x516" L.L.V.	12*		



<u>ა</u>გ Weekl David 7

Homes

ERING TOWN, PA 18951 (215) 804-4449

Ш

NUBN

Ш

S

#20 Mode Lot inton renity,

9

Structural


Carolina

North

igh,

Serenity Raleigh, General Sere B328 Project #: 047-20008 Designed By: JPS Checked By:

Issue Date: 1/30/23 Re-Issue: Scale: 1/8"=1'-0" @ 11×17 1/4"=1'-0" @ 22x34

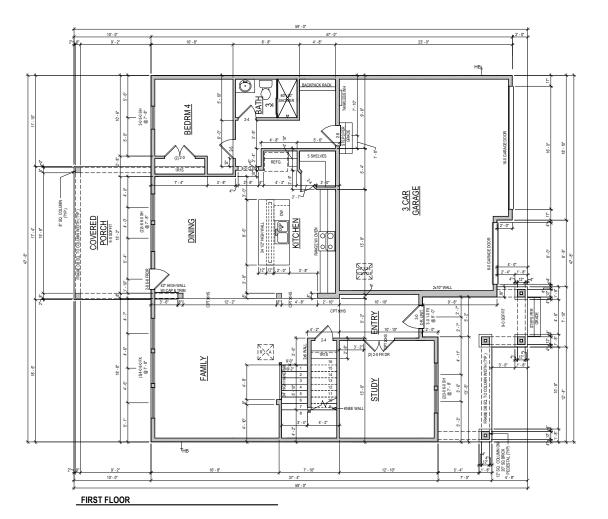

GENERAL REQUIREMENTS

RAILING REQUIREMENTS
FINISHED HANDRAIL REQUIRED AT STAIRS WITH 4 OR MORE RISERS

FINISHED GUARDRAILS REQUIRED AT DECKS, BALCONIES AND WALKWAYS THAT ARE 30° OR GREATER ABOVE GRADE AND BE AT A MINIMUM OF 36" IN HEIGHT

FINISHED GUARDRAIL AND HANDRAIL SPINDLES MUST BE SPACED SO A 4° SPHERE WILL NOT PASS THROUGH .

© Weekley H
The measurements, dimension
shown on this document are gu
only. The actual specifications,
vary. This document mavaries
of what it.

NOTE: ALL 1ST FLR. CEILING HEIGHTS 9' - 0" UNLESS NOTED OTHERWISE ADVANCED FRAMING: 2X6 EXTERIOR PERIMETER WALLS & ALL INSULATED WALLS UNI ESS NOTED OTHERWISE

David Weekley Homes

Scale:1/8"=1'-0" Rev: 12/14/22 EB


CN/NU/SG Date: 9/30/2020

Job No.: 0020

\neg	Lot: 20	Block:
	Proj. No.: 3277	Job No.:
BEDRA 4 BATH 2 2ND SINK @ BATH 2	SERENITY 65' (IM) 81 WEI COME DR	FUQUAY VARINA, NC

PLAN SQFT				
LIVING				
1ST FLOOR	1408 SF			
2ND FLOOR	1420 SF			
TOTAL LIVING	2828 SF			
SLAB				
1ST FLOOR	1408 SF			
COVERED PORCH	173 SF			
FRONT PORCH	178 SF			
GARAGE	620 SF			
TOTAL SLAB	2379 SF			
FRAMING				
1ST FLOOR	1408 SF			
2ND FLOOR	1349 SF			
COVERED PORCH	173 SF			
FRONT PORCH	178 SF			
GARAGE	620 SF			
TOTAL FRAMING	3728 SF			



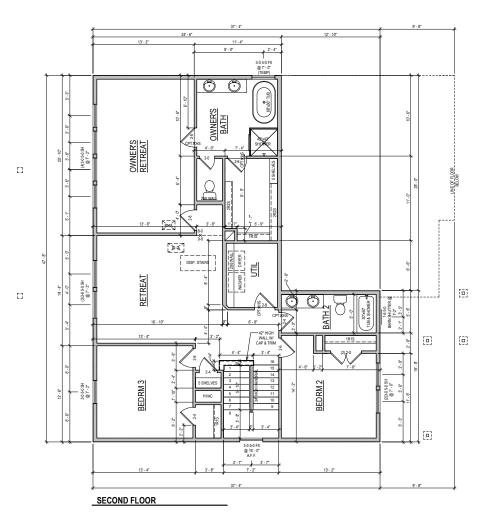

NOTE: ALL 2ND FLR. CEILING HEIGHTS 9' - 0" UNLESS NOTED OTHERWISE

Dav 20 Lot: Proj. No.: 3277 Job No.: 0020

EXTERIOR INSULATED THERWISE	Week lay Homes L.P. The measurements dimensions, and other specified in the document and the specified on the document of the specified on the finished in this hink is the finished.	vary. This document may not be relied on as a right of what the completed structure will look like.
ADVANCED FRAMING: 2X6 EXTERIOR PERIMETER WALLS & ALL INSULATED WALL S. INILESS NOTED OTHERWISE	vid Weekley Homes	Scale:1/8"=1:-0"
	 vid	ی

Scale:1/8"=1'-0" Rev: 12/14/22 EB

CN/NU/SG Date: 9/30/2020

Block:

SERENITY 65' (IM) 81 WELCOME DR FUQUAY VARINA, NC

B328-B PLN-2 KINTON RALEIGH



ENGINEERING
E, SUITE 201, QUAKERTOWN, PA 18951
COM
(215) 804-4449

KSE



□□□□□□□ ⇒ INTERIOR BEARING WALL ⇒ BRACED WALL PANEL

(SEE KSE STRUCTURAL DETAILS SET FOR BRACED WALL PANEL SHEATHING FASTENING & BLOCKING DETAILS)

REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES, TYPICAL DETAILS AND ADVANCED FRAMING NOTES AND DETAILS

KEYNOTES:

(2)#4 x 4'-0" LONG BARS AT 3" O.C., CENTERED IN SLAB, TYP. WHERE SHOWN



Monolithic Slab Foun Serenity, Lot #20 B328 Kinton Model Serenity Raleigh, North Caroli Project #: 047-20008 Designed By: JPS Checked By: Issue Date: 1/30/23 Re-Issue: Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

Plan

Foundation

Carolina

SLAB @ OPENING 10'-0" 18'-10" 16'-3" GARAGE SLAB -8" DEEP x 16" 4" THICK CONCRETE SLAB w/ FIBERMESH PER MANUFACTURER WIDE THICKENED SLAB (TYP.) PIBERMESH PER MANUFACTOREN OR 6x6 W1.4xW1.4 WELDED WIRE MESH ON 6 MIL VAPOR BARRIER ON 95% COMPACTED FILL. SLOPE 1/6" PER 1'-0" TOWARDS DOOR. -3/2" SLAB ON GRADE 4" THICK CONCRETE SLAB w/ FIBERMESH PER MANUFACTURER 4" THICK CONCRETE SLAB w/ FIBERMESH PER MANUFACTURER OR 6x6 W1.4xW1.4 WELDED -16" WIDE x 20" OR 6x6 W1.4xW1.4 WELDED WIRE MESH ON 6 MIL VAPOR BARRIER DEEP MONOLITHIC CONCRETE FOOTING 2/2 2'-0" ON 95% COMPACTED FILL. (TYP.) WIRE MESH ON 95% COMPACTED FILL. 30"x30"x12" DEEP CONCRETE FOOTING 30"x30"x12" DEEP CONCRETE -FOOTING 16'-10" -8" DEEP x 16" (I) WIDE THICKENED SLAB (TYP.) 4" THICK CONCRETE SLAB W/— FIBERMESH PER MANUFACTURER DR 6x6 W1.4xW1.4 WELDED WIRE MESH ON 95% COMPACTED FILL. 16" WIDE x 20" DEEP-MONOLITHIC CONCRETE FOOTING (TYP.)

59'-0"

13'-10"

24'-6"

10'-8"

47'-0"

16" WIDE x 20" DEEP-MONOLITHIC CONCRETE FOOTING. PROVIDE 6" STEM @ GARAGE.

TURNDOWN -

6.

- 20" WIDE x 20" DEEP MONOLITHIC CONCRETE FOOTING (TYP. @ BRICK VENEER)

10'-0"

8

66-13/1

10'-0"

10'-8"

MONOLITHIC SLAB FOUNDATION PLAN

12'-10"

13'-10"

37'-4"

59'-0"





48" WSP

JOIST

48" WSP

START JOIST LAYOUT HERE

16" 19.2" O.C.
DIMENSION IS

TO REAR FACE OF JOIST

(1)2×10 (

(1)2×10

(1)2×10

(2)2x12

(2)2x12

COVERED PORCH

STRUCTURAL COLUMN BY OTHERS WITH MIN. 5,000 LB. CAPACITY. INSTALL PER

MANUFACTURER'S INSTRUCTIONS.

SIMPSON

HUC210-2 (TYP.)

RIM BOARD

BATH 3

BEDRM

DINING

FAMILY

RIM BOARD

48" WSP

(2)13/"x14" LVL FLUSH

#-#-#-#

HANGER PER JOIST SUPPLIER

(TYP.)

HANGERS PER TRUSS-

SUPPLIER (TYP.)

FASTEN ROOF GIRDER TRUSS TO WALL TOP PLATES W/ SIMPSON DSC5R-SDS3

-ROOF TRUSSES

@ 24" O.C.

/4 (2)2×12 (

CS-PF

(2)2×10

SIMPSON

HUC210-2

-ROOF TRUSSES

@ 24" O.C.

-STRUCTURAL COLUMN, INSTALL PER MANUFACTURER'S

SPECIFICATIONS (TYPICAL)

ROOF TRUSSES @ 24" O.C

ROOF TRUSSES @ 24" O.C.

124" GB(2)

ENTRY

HNSTALL RIM BOARD ALONG TOP OF WALL AT BEARING WALL ABOVE

STUDY

48" WSP

2x4 LEDGER w/

(2) ROWS 12d

NAILS @ 16" O.C.

RIM BOARD

Q210

3 CAR

GARAGE

(TYP.)

(2)2×6 ROOF TRUSS-VALLEY SET

KITCHEN

2x6 @ 12" O.C. BALLOON

FRAMED WALL

SECOND FLOOR FRAMING PLAN

DOUBLE JOIST © BEARING WALL ABOVE

DOUBLE JOIST

PROVIDE SOLID BLOCKING
WITHIN FLOOR SYSTEM TO MATCH POST SIZE ABOVE.

 \implies BEARING WALL ABOVE ⇒ INTERIOR BEARING WALL

48" WSP

⇒ BRACED WALL PANEL
(SEE KSE STRUCTURAL DETAILS
SET FOR BRACED WALL PANEL SHEATHING FASTENING & BLOCKING DETAILS)

REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES, TYPICAL DETAILS AND ADVANCED FRAMING NOTES AND DETAILS

PLAN DESIGNED WITH 9' NOMINAL WALL PLATE HEIGHT

FLOOR FRAMING TO BE 14" DEEP TJI 210 SERIES OR EQUAL, SPACING PER MANUFACTURER.



Second Floor Serenity, Lot B328 Kinton Serenity Raleigh, North Project #: 047-20008 Designed By: JPS

#20 Model

Carolina

North

Plan

Framing


Floor

Checked By: Issue Date: 1/30/23

Re-Issue: Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

ENGINEERING
E, SUITE 201, QUAKERTOWN, PA 18951
COM (215) 804-4449

KSE

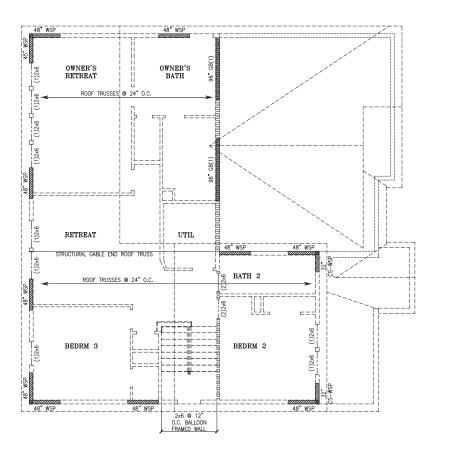

ROOF FRAMING PLAN



PROVIDE SOLID BLOCKING

WITHIN FLOOR SYSTEM TO
MATCH POST SIZE ABOVE.


⇒ BEARING WALL ABOVE

□□□□□□□ ⇒ INTERIOR BEARING WALL BRACED WALL PANEL
(SEE KSE STRUCTURAL DETAILS
SET FOR BRACED WALL PANEL
SHEATHING FASTENING &
BLOCKING DETAILS) 48" WSP

REFER TO KSE STRUCTURAL DETAILS SET FOR GENERAL STRUCTURAL NOTES, TYPICAL DETAILS AND ADVANCED FRAMING NOTES AND DETAILS

PLAN DESIGNED WITH 9' NOMINAL WALL PLATE HEIGHT

Roof Framing Plan
Serenity, Lot #20
B328 Kinton Model
Serenity
Raleigh, North Carolina Project #: 047-20008 Project #: 047-20008
Designed By:JPS
Checked By:
Issue Date: 1/30/23
Re-Issue:
Scale: 1/8"=1'-0" @ 11x17
1/4"=1'-0" @ 22x34

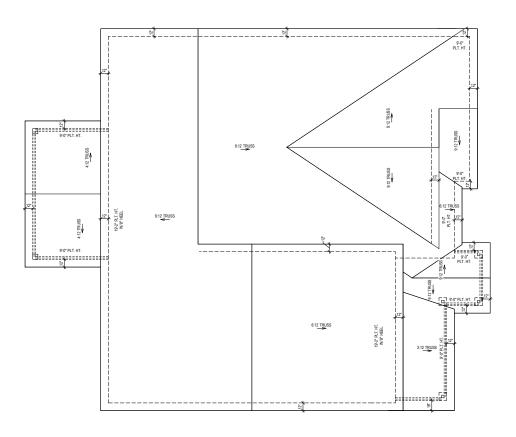

ROOF PLAN

 David Weekley Homes

 cunnuss
 | | |


 cunnuss
 | |

 Date: 9/30/2020
 | |

Proj. No.: Lot: 20
3277
Job No.: Block: - | 0
0020

SERENITY 65' (IM) 81 WELCOME DR FUQUAY VARINA, NC

NORTH
B328-B
RFP-1
KINTON
RALEIGH

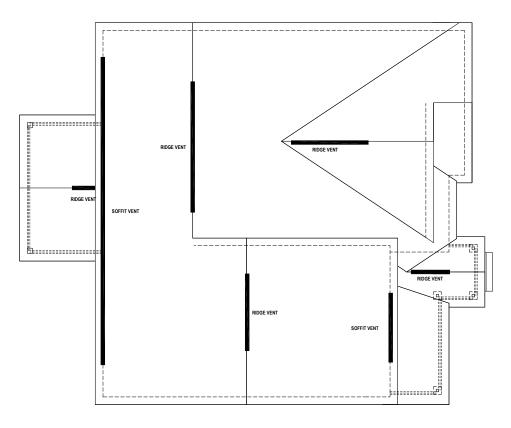

ATTIC VENT CALCULATION

ROOF VENT CALCULATION: ATTIC SPACE: 2379 SQ.FT.

REQUIRED VENTILATION: 1142 SQ.IN. REQ.

SOFFIT VENT PROVIDED: 49 LINEAL FEET RIDGE VENT PROVIDED: 50 LINEAL FEET AIR HAWK VENT PROVIDED: 0 UNITS

PROVIDED VENTILATION: 1145 SQ.IN.

50-80% IN UPPER PORTION: 79%

Week lay Homes L.P. 2021
The measuments, dimensions, and other specifications shown on this document are guidelines for construction upon. The section specification or left finished structure movery. This document may not be relief on as a represented of what the completed structure will look like.

David Weekley Homes


CNNUJSG | Scale:1/8"=1-0"


Rev. 12/14/22 EB

3277 Lot: 20
3277 Block: 0020 Sect: -

SERENITY 65' (IM) 81 WELCOME DR FUQUAY VARINA, NC



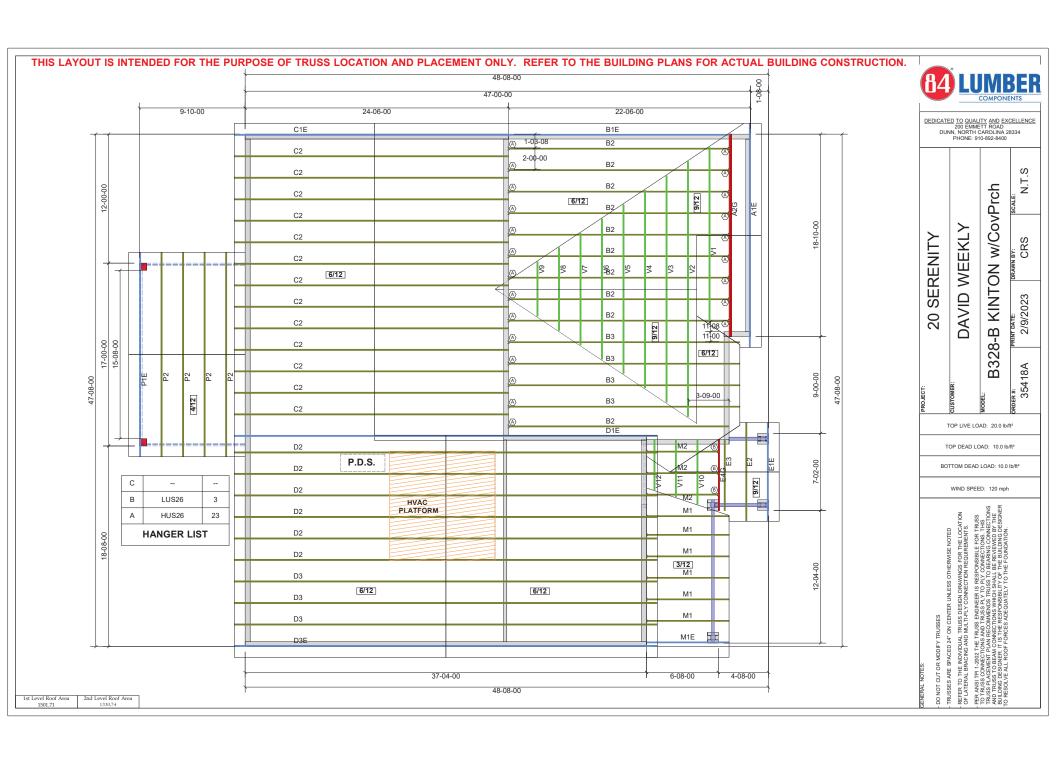

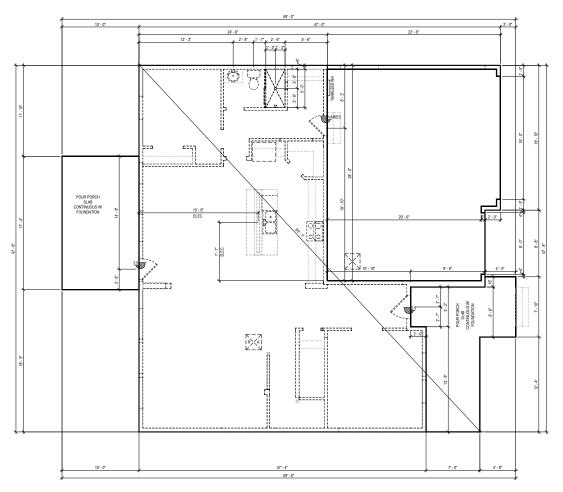

FIRST FLOOR

SEE ENGINEERING FOR ANCHOR BOLT REQUIREMENTS

© Week key Homes L.P. 2021

The measurement climention, and not specifications shown on this document are against set construction use only. The state independent on the inhaled structure may very. This document may not be relied on a a representation of what the completed structure will look like.

 David Weekley Homes


 CNNUSG
 Scale:1/8"=1"-0"

 Date: 9/30/2020
 Rev: 1/2/14/22 EB

Lot: 20

| SERENITY 65' (IM) | Proj. No.: | 81 WELCOME DR | 3277 | FUQUAY VARINA, NC | 0020 |

NORTH B328-B FS-1 KINTON RALEIGH

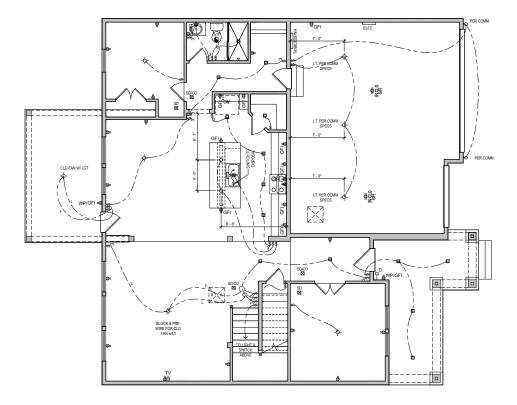

FIRST FLOOR

ALL RECESS CANS SHOWN ON PLAN ARE **LED** PER COMMUNITY SPEC.

	UTILIT	Y LE	GEND
ф	110V OUTLET 12" A.F.F. (U.N.O.)	F	ELEVATOR CALL BUTTON
GFI	GROUND FAULT INTERRUPTOR (WEATHER PROOF AS NOTED)	DI VT	RECESS CAN LIGHT (EYEBALL AS NOTED)
1/2	HALF HOT OUTLET	e VI	EXHAUST VENT
•	220V OUTLET (36* A.F.F. @ UTILITY)	SD ⊠	SMOKE DETECTOR (CARBON MONOXIDE AS NOTED)
•	PHONE LINE	₽₽	DOOR BELL
γф	CABLE TELEVISION	CHIMES	DOOR BELL CHIMES
\$	STANDARD SWITCH (3 OR 4 WAY AS NOTED)	ELEC	PANELBOARD W/ CIRCUIT BREAKERS
φ-	SURFACE MOUNTED LIGHT	HB _†	HOSE BIB
Ŷ _□	SURFACE MOUNTED LED D DISC LIGHT	GAS T CW HW	GAS TAP
Q	WALL MOUNTED LIGHT	11	COLD/HOT WATER SUPPLY

IN ALL HABITABLE ROOMS LIGHT BOXES MUST BE FAN RATED © Week lay Homes L.P. 2021
measus ments, dimensions, and other spedifications who of this document are apidients for construction use.
The actual spediculations of the finished structure may be also as a representation and the conveyed structure will look flux. We have the conveyed structure will look flux.

 David Weekley Homes

 CNNUSG
 Scale: 1/2" = 1-0"

 Date: 9/30/2020
 Rev: 1/2/14/22 EB

9777 Lot: 20 3277 Block: 7 Job No.: Block: 7 0020 Sect: -

SERENITY 65' (IM) 81 WELCOME DR FUQUAY VARINA, NC

NORTH
B328-B
ELE-1
KINTON
RALEIGH

ALL RECESS CANS SHOWN ON PLAN ARE **LED** PER COMMUNITY SPEC.

UTILITY LEGEND 110V OUTLET
 12" AF.F. (U.N.O.)

GFI GROUND FAULT INTERRUPTOR
 (WEATHER PROOF AS NOTED) ELEVATOR CALL BUTTON RECESS CAN LIGHT (EYEBALL AS NOTED) VT EXHAUST VENT HALF HOT OUTLET SD SMOKE DETECTOR (CARBON MONOXIDE AS D NOTED) DOOR BELL ▼ PHONE LINE CHIMES DOOR BELL CHIMES
ELEC. PANELBOARD W/
CIRCUIT
BREAKERS
HOSE BIB CABLE TELEVISION \$ STANDARD SWITCH (3 OR 4 WAY AS NOTED) - SURFACE MOUNTED LIGHT GAS GAS TAP - SURFACE MOUNTED LED DISC LIGHT CW_HW COLD/HOT WATER SUPPLY Q WALL MOUNTED LIGHT

> IN ALL HABITABLE ROOMS LIGHT BOXES MUST BE FAN RATED

SD/CO [b4] [8] [0] [0]

SECOND FLOOR

E3

[3

SERENITY 65' (IM) 81 WELCOME DR FUQUAY VARINA, NC

Week key Homes L.P.
The measured friendings, and other gar,
above on the document are paletime for conyory. The status pedicitization of the faitheant
or way. This document may not hear and
of what the connection.

David Weekley Homes

20

Lot:


Proj. No.: 3277 Job No.: 0020

Scale:1/8"=1'-0" Rev: 12/14/22 EB

CN/NU/SG Date: 9/30/2020

B328-B ELE-2

> KINTON RALEIGH

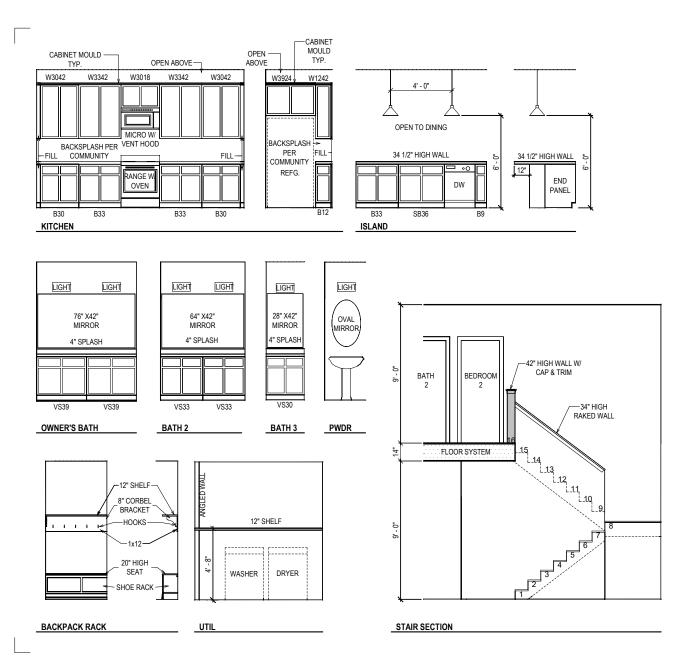




Fot Proj. No.: 3277 Job No.: 0020 SERENITY 65' (IM) 81 WELCOME DR FUQUAY VARINA, NC

(S	David Weekley Homes
	"O".14"=1.0"

} ·	David weekley	ekiey
	CN/NO/OG	Scale: 1/4
•	Date: 06/04/2021	Rev: 12/14






















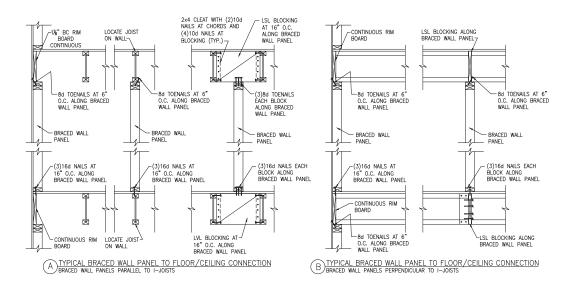




© METHOD GB(1) AND GB(2) INTERSECTION DETAILS







HEEL HEIGHT GREATER THAN 91/4" AND LESS THAN 151/4"

HEEL HEIGHT GREATER 15"

D TYPICAL EXTERIOR CORNER WALL FRAMING

NOTE: A THIRD STUD AND/OR PARTITION INTERSECTION BACKING STUDS SHALL BE PERMITTED TO BE OMITTED
THROUGH THE USE OF WOOD BACKUP CLEATS, METAL
DRYWALL CLIPS OR OTHER APPROVED DEVICES THAT WILL SERVE AS ADEQUATE BACKING FOR THE FACING MATERIALS.

E ROOF TRUSS BEARING/BLOCKING AT BRACED WALL PANELS ONLY REQUIRED AT BRACED WALL PANELS

Designed By: JPS Checked By: Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

Details #20 Model

Braced Wall [Serenity, Lot B328 Kinton Kinton Lot

Project #: 047-20008

Issue Date: 1/30/23 Re-Issue:

Carolina

North

Serenity Raleigh,



















SHEAR WALL, SEE SCHEDULE AND PLANS FOR LOCATION

HOLD DOWN INSTALLED PER HOLD DOWN SCHEDULE THIS SHEET, SEE PLANS FOR TYPE

A36 ALL THREAD ROD-

SIMPSON CNW1/2 -OR USP CNW12-ZP COUPLER NUT

GROUT CMU SOLID AT ALL THREAD ROD-

AND LOCATION.

(2) 2x FULL HEIGHT

STUD w/ 10d NAILS

@ 6" O.C. EACH PLY

2x FULL HEIGHT STUDS


A TYPICAL HOLD DOWN DETAIL


E HOLD DOWN AT CRAWL FOUNDATION

w/ 16d NAILS @ 6" O.C.

-HOLD DOWN INSTALLED PER HOLD DOWN SCHEDULE THIS SHEET

B TYPICAL HOLD DOWN DETAIL






(C)HOLD DOWN AT STEMWALL SLAB

-HOLD DOWN INSTALLED PER HOLD DOWN SCHEDULE THIS SHEET

- A36 ALL THREAD ROD DRILLED AND EPOXIED 6" INTO FOOTING USING SIMPSON "SET"/"ET" OR USP CIA-GEL ADHESIVE.



	ŀ	HOLD DOWN	SCHEDULE
HOLD SIMPSON	DOWN USP	ALL TREAD ROD	FASTENERS
LTTP2	LTS20B	½" DIA.	(10)10d NAILS
HTT4	HTT16	%" DIA.	(18)16dx2½" LONG NAILS
HTT5	HTT45	%" DIA.	(26)16dx2½" LONG NAILS

Project #: 047-20008 Designed By: JPS Checked By: Issue Date: 1/30/23 Re-Issue: Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34


Hold-Down Details Serenity, Lot #20 B328 Kinton Model

#20 Model

Carolina

North

|Serenity |Raleigh, |

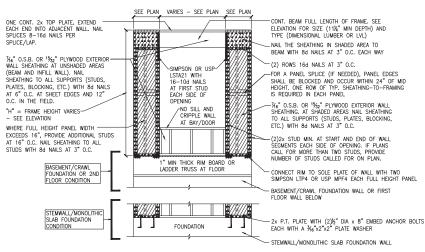


(B) METHOD CS-PF: CONTINUOUS PORTAL FRAME PANEL CONSTRUCTION TWO BRACED WALL SEGMENTS

	BRACED WALI	_ PANEL AN	ND ENGINEERED SHEAR WALL SCHEDULE
PANEL TYPES	PANEL TYPE	MATERIAL	FASTENERS
WSP	INTERMITTENT WOOD STRUCTURAL PANEL	7/16" OSB	6D OR 8D COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. ENGINEERED ALTERNATIVE: 16 GAGE BY 1.75" LONG STAPLES AT 3" O.C. AT SHEET EDGES AND 6" O.C. AT INTERMEDIATE SUPPORT
GB(1)	INTERMITTENT GYPSUM BOARD (SHEATHING ONE FACE OF WALL)	1/2" GYPSUM	1.5" LONG GALV. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 7" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.
GB(1)-4	INTERMITTENT GYPSUM BOARD (SHEATHING ONE FACE OF WALL)	1/2" GYPSUM	1.5" LONG GALV. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 4" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.
GB(2)	INTERMITTENT GYPSUM BOARD (SHEATHING BOTH FACES OF WALL)	1/2" GYPSUM	1.5" LONG GALV. ROOFING NAILS, 6d COMMON NAILS, OR 1.25" LONG TYPE W DRYWALL SCREWS AT 7" O.C. AT SHEET EDGES AND INTERMEDIATE SUPPORTS.
CS-WSP	CONTINUOUS SHEATHED WOOD STRUCTURAL PANEL	7/16" OSB	6D OR 8D COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. <u>ENGINEERED ALTERNATIVE</u> : 16 GAGE BY 1.75" LONG STAPLES AT 3" O.C. AT SHEET EDGES AND 6" O.C. AT INTERMEDIATE SUPPORT.
CS-PF	CONTINUOUS SHEATHED PORTAL FRAME	7/16" OSB	NAILING PER DETAIL
CS-EPF	PORTAL FRAME WITH HOLD DOWNS	7/16" OSB	NAILING PER DETAIL
CS-ESW(1)	ENGINEERED SHEAR WALL, TYPE 1	7/16" OSB	8D COMMON NAILS AT 6" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS
CS-ESW(2)	ENGINEERED SHEAR WALL, TYPE 2	7/16" OSB	8D COMMON NAILS AT 4" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS
CS-ESW(3)	ENGINEERED SHEAR WALL, TYPE 3	7/16" OSB	8D COMMON NAILS AT 3" O.C. AT SHEET EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. CONTINUOUS OSB AROUND DOOR/WINDOW OPENINGS

BRACED WALL PANEL NOTES:

- ALL BRACED WALL PANELS, EXCEPT GB(1) & GB(2), SHALL HAVE 2x BLOCKING BETWEEN WALL STUDS AT ALL HORIZONTAL SHEET EDGES.
- PROVIDE NAILING/BLOCKING ABOVE AND BELOW ALL BRACED WALL PANELS PER KSE BRACED WALL DETAILS.
- SHEATH ALL EXTERIOR WALLS OF THE HOUSE WITH 1/46" O.S.B., OR 15/32" PLYWOOD, FASTENED PER IRC. AT EXTERIOR CORNERS, SHEATHING SHALL BE FASTENED PER KSE BRACED WALL DETAILS. AT INTERIOR WALL INTERSECTIONS, FASTEN STUDS & WALL BRACING PER KSE BRACED WALL DETAILS.
- BRACED WALL PANELS AND ENGINEERED SHEAR WALLS ARE PROVIDED PER IRC. PANEL LENGTHS SHOWN ON PLANS ARE THE MINIMUM LENGTH REQUIRED.



WINDOW OR DOOR REINFORCEMENT IN ENGINEERED SHEAR WALL ONLY REQUIRED WHERE SPECIFIED ON PLANS



Detail ઝ Notes Wall

#20 Model Lot Kinton Braced W Serenity, B328 Kint Serenity Project #: 047-20008

Carolina

North

leigh,

Raj

Designed By: JPS Checked By: Issue Date: 1/30/23


Re-Issue: 1/4"=1'-0" @ 22x34

JEERING

KRENTOWN, PA 18951
(215) 804-4449

ENGINE

S

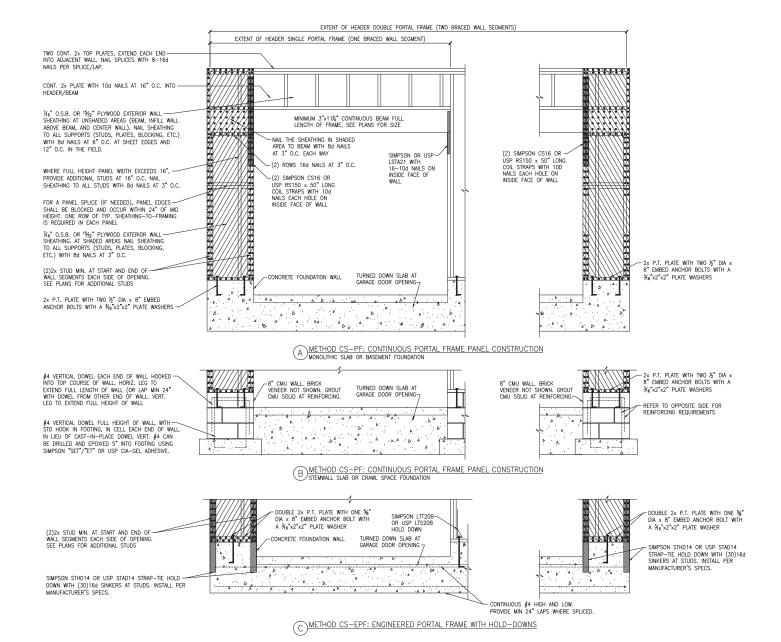



Carolina #20 Model North Lot Kinton Serenity, B328 Kin Serenity Raleigh,

Details

Frame

Portal Project #: 047-20008 Designed By: JPS Checked By:

Issue Date: 1/30/23

Re-Issue: 1/4"=1'-0" @ 22x34

KSE

ENGINEERING
E, SUITE 201, QUAKERTOWN, PA 18951
COM (215) 804-4449











Details Miscellaneous Framing De Serenity, Lot #20 8328 Kinton Model Serenity Raleigh, North Carolina


Project #: 047-20008
Designed By: JPS
Checked By:
Issue Date: 1/30/23

Re-Issue: Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

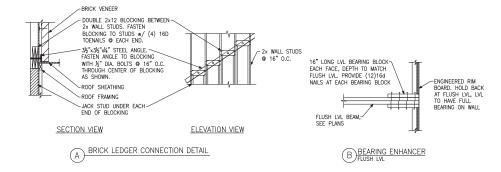



C I-JOIST LADDER BLOCKING
AS REQUIRED @ PARALLEL WALLS

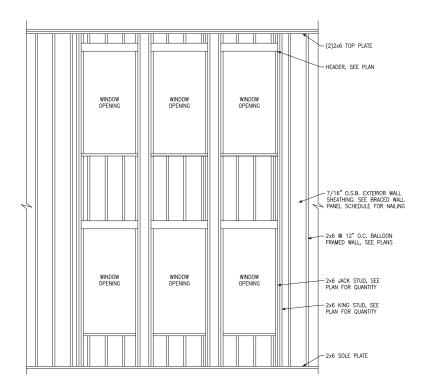

DBALLOON FRAMED WALL DETAIL N.T.S.

	WALL	STUD SIZE,	HEIGHT & SPA	ACING SCHEDU	JLE	
BEARING WALLS					NONBEARING WALLS	
STUD SIZE	LATERALLY UNSUPPORTED STUD HEIGHT	MAXIMUM SPACING WHEN SUPPORTING A ROOF-CEILING ASSEMBLY OR A HABITABLE ATTIC ASSEMBLY, ONLY	MAXIMUM SPACING WHEN SUPPORTING ONE FLOOR, PLUS A ROOF-CEILING ASSEMBLY OR A HABITABLE ATTIC ASSEMBLY	MAXIMUM SPACING WHEN SUPPORTING TWO FLOORS, PLUS A ROOF-CEILING ASSEMBLY OR A HABITABLE ATTIC ASSEMBLY	LATERALLY UNSUPPORTED STUD HEIGHT	MAXIMUM SPACING
2x4	10'-0"	24"	16"	-	14'-0"	24"
2x6	10'-0"	24"	24"	16"	20'-0"	24"

ENGINEERING

E. SUITE 201, QUAKERTOWN, PA 18951

COM

(215) 804-4449

S

-WALL STUD OR GABLE TRUSS

TOENAIL RAFTER TO LEDGER

-2x4 LEDGER, FASTEN TO WALL

STUDS w/(2) ROWS SIMPSON

SDS14x31/2" SCREWS @ 16" O.C.

-2x4 RAFTER & CEILING JOIST,

LAP AND FACE NAIL WITH (4)

2x4 LEDGER. FASTEN TO WALL

OR GABLE TRUSS WITH (2)

ROWS 12d NAILS @ 16" O.C.

WITH (4) 12d NAILS

12d NAILS



Kinton Serenity, B328 Kin

Issue Date: 1/30/23 Re-Issue:

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34

Designed By: JPS Checked By:

Miscellaneous

Lot

Detail


Framing

Project #: 047-20008

Raleigh,





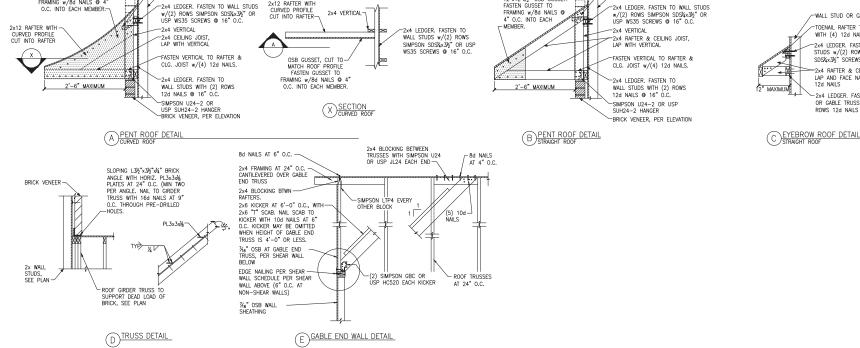

NAILS, AT 6" O.C. AT SHEET EDGES AND 12" O.C., IN THE FIELD. 2x12 (B1) .. -(2)2x12. FASTEN - MOMENT CONNECTION STRAPS PER SIMPSON w/ 2 ROW 10D NAILS @ 12" O.C PFS-HKS KIT (TYP.) SEE SIMPSON SINGLE-WALL PORTAL FRAME KIT INSTALLATION INSTRUCTIONS -(2)2x10 (T-L-PFSHWIN) FOR ADDITIONAL INFORMATION -FASTEN (2)2x10 w/ 3 ROWS 10d NAILS @ 9" O.C. 2x10 (C2) -2x10 (C1) -SIMPSON SET-3G EPOXY w/ 56" DIA. ALL THREAD ROD, %6" MIN. — SHIM PANEL 12" EMBEDMENT FOUNDATION WALL -SIMPSON PFS-HKS HOLDOWN ASSEMBLY SEE H/SD-6 FOR FOUNDATION DETAIL.

-LINE OF OPTIONAL BRICK

FASTEN RAFTER TO LEDGER WITH SIMPSON H3 OR USP RT3A

-2x4 LEDGER. FASTEN TO WALL STUDS

w/(2) ROWS SIMPSON SDS¼x3½" OR USP WS35 SCREWS @ 16" O.C.

2x12 RAFTER WITH

CURVED PROFILE CUT INTO RAFTER

2x4 VERTICAL

-WALL STUD OR GABLE TRUSS

-WALL SHEATHING

OSB GUSSET, CUT TO MATCH ROOF PROFILE FASTEN GUSSET TO

FRAMING w/8d NAILS @ 4" O.C. INTO EACH MEMBER.-

F SIMPSON STRONG-WALL SITE-BUILT PORTAL FRAME CONSTRUCTION SINGLE-WALL PORTAL

G SIMPSON STRONG-WALL SITE-BUILT FRAMING DETAIL SINGLE-WALL PORTAL

- SIMPSON ABW44Z POST BASE

MOMENT CONNECTION STRAPS PER SIMPSON

PFS-HKS KIT (TYP.)

H FOUNDATION SECTION
GARAGE WALL @ SIMPSON PORTAL

10¼" MIN.

12" MIN

3" MIN.

SIMPSON SET-3G EPOXY w/ %" DIA. ALL THREAD ROD. 12" EMBEDMENT

PER SIMPSON PFS9 ANCHOR TEMPLATE PROVIDED WITH KIT.

MAX.

LINE OF OPTIONAL BRICK

FASTEN RAFTER TO LEDGER WITH SIMPSON H3 OR USP RT3A

WALL STUD OR GABLE TRUSS

-WALL SHEATHING

12"x12"x½" OSB GUSSET. FASTEN GUSSET TO

FRAMING w/8d NAILS @

4" O.C. INTO EACH

ENGINEERING

E. SUITE 201, QUAKERTOWN, PA 18951

COM

(215) 804-4449

S



Monolithic Serenity, B328 Kin

Re-Issue:

Scale: 1/8"=1'-0" @ 11x17 1/4"=1'-0" @ 22x34


Project #: 047-20008 Designed By: JPS Checked By: Issue Date: 1/30/23

Serenity

Kinton

North Raleigh,







FINSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C., SEE FOUNDATION NOTES.

LIVING SPACE

H)THICKENED SLAB

CONCRETE SLAB POURED MONOLITHICALLY WITH FOOTING, SEE PLAN.

"4" GRAVEL FILL OR GROUP 1 CLASSIFIED SOIL

COMPACTED FILL

MONOLITHIC CONCRETE FOOTING, SEE PLAN.


2x STUD WALL w/ P.T. PLATE, SEE PLAN.

STEP VARIES

(aaaaa)

24" MAX

GARAGE SPACE

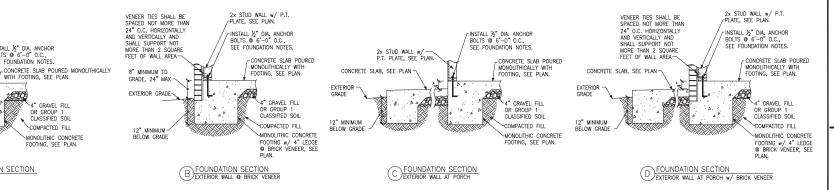

CONCRETE SLAB POURED

4" GRAVEL FILL

OR GROUP 1 CLASSIFIED SOIL

COMPACTED FILL

-MONOLITHIC CONCRETE FOOTING

MONOLITHICALLY WITH FOOTING, SEE PLAN.

G GARAGE DOOR SECTION

BONUSESS @ GARAGE DOQR



2x STUD WALL w/— P.T. PLATE, SEE PLAN.

8" MINIMUM TO

GRADE, 24" MAX

12" MINIMUM~ BELOW GRADE

EXTERIOR GRADE \

rINSTALL ½" DIA. ANCHOR BOLTS @ 6'-0" O.C.,

SEE FOUNDATION NOTES.


4" GRAVEL FILL OR GROUP 1

CLASSIFIED SOIL


COMPACTED FILL

-MONOLITHIC CONCRETE

FOOTING, SEE PLAN.







2x STUD WALL w/ P.T. PLATE, SEE PLAN.

-INSTALL ½" DIA. ANCHOR BOLTS ⊕ 6'-0" O.C., SEE FOUNDATION NOTES.

STEP VARIES.

]24" MAX.

FOUNDATION SECTION
EXTERIOR GARAGE WALL @ BRICK VENEER

CONCRETE SLAB POURED

MONOLITHICALLY WITH FOOTING, SEE PLAN.

4" GRAVEL FILL

OR GROUP 1 CLASSIFIED SOIL

COMPACTED FILL

MONOLITHIC CONCRETE

FOOTING w/ 4" LEDGE BRICK VENEER, SEE

ISOLATED PAD FOOTING INTERIOR COLUMN

VENEER TIES SHALL BE SPACED NOT MORE THAN

24" O.C. HORIZONTALLY AND VERTICALLY AND SHALL SUPPORT NOT MORE THAN 2 SQUARE FEET OF WALL AREA


8" MINIMUM TO

GRADE, 24" MAX

EXTERIOR GRADE

12" MINIMUM

BELOW GRADE



THICKENED SLAB SECTION (J)INTERIOR BEARING WALL

ENGINEERING

E. SUITE 201, QUAKERTOWN, PA 18951

COM

(215) 804-4449

S



Carolina

North

Notes

ઝ

Details

Framing







Re-Issue:

1/4"=1'-0" @ 22x34



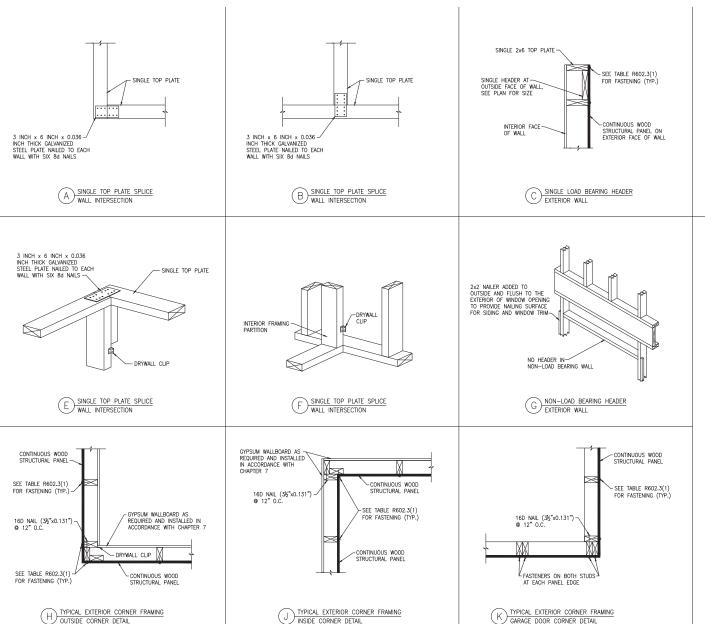



ADVANCED FRAMING NOTES

1.) EXTERIOR WALLS TO BE 2x6 S.P.F. STUDS @ 24" O.C. WITH SINGLE TOP PLATE, TOP PLATE TO BE SPLICED PER NC RESIDENTIAL CODE.

2.) INTERIOR BEARING WALLS TO BE PER NC RESIDENTIAL CODE.

3.) ROOF TRUSSES AND FLOOR JOISTS ARE TO BE STACKED AND CENTERED OVER STUDS WITH A TOLERANCE OF NO MORE THAN 1 INCH. ADDITIONAL STUDS ARE TO BE ADDED WHERE THE ROOF TRUSSES AND FLOOR JOISTS ARE NOT STACKED OVER STUDS WITHIN 1" TOLERANCE.

4.) INTERIOR NON-LOAD BEARING WALLS TO BE 2x4 S.P.F. STUDS @ 24" O.C. WITH SINGLE TOP PLATE, TOP PLATE TO BE SPLICED PER NC RESIDENTIAL CODE.

5.) LOAD-BEARING HEADERS ARE NOT REQUIRED IN INTERIOR OR EXTERIOR NONBEARING WALLS. A SINGLE FLAT 2x MEMBER MAY BE USED AS A HEADER IN INTERIOR OR EXTERIOR NONBEARING WALLS FOR OPENINGS UP TO 8 FEET IN WIDTH IF THE VERTICAL DISTANCE TO THE PARALLEL NAILING SURFACE IS NOT MORE THAN 24 INCHES. FOR SUCH NONBEARING HEADERS, NO CRIPPLES OR BLOCKING ARE REQUIRED ABOVE THE HEADER.