### Residence for

### Garman Homes Lot 0099 Serenity Fuquay Varina, North Carolina

### **INDEX TO DRAWINGS**

### **COVER SHEET**

- FRONT & LEFT SIDE ELEVATIONS
- **REAR & RIGHT SIDE ELEVATIONS**
- FIRST & SECOND FLOOR PLANS
- FIRST & SECOND FLOOR ELECTRICAL PLANS FIRST & SECOND FLOOR MECHANICAL PLANS
- FIRST FLOOR PLUMBING PLAN
- CONSTRUCTION DETAILS

FOUNDATION PLAN - CRAWLSPACE STANDARD

FIRST FLOOR FRAMING PLAN SECOND FLOOR FRAMING PLAN - PULL DOWN STAIR STANDARD

ROOF FRAMING PLAN

S4 SD1 SD2 STRUCTURAL DETAILS STRUCTURAL DETAILS

SD3 STRUCTURAL DETAILS

CONSTRUCTION SPECIFICATIONS

### **GENERAL NOTES**

- 1. ALL WORK TO BE DONE IN STRICT ACCORDANCE WITH NORTH CAROLINA STATE RESIDENTIAL BUILDING CODE, 2018 EDITION (HEREWITH SHOWN AS N.C.S.R.B.C.).
- 2. DIMENSIONS SHOWN ON DRAWINGS GOVERN OVER SCALE.
- 3. STUD WALL DESIGN SHALL CONFORM TO ALL N.C.S.R.B.C.
- 4. CONTRACTOR SHALL USE TEMPERED SAFETY GLASS IN ALL LOCATIONS AS REQUIRED BY N.C.S.R.B.C., 2018 EDITION, SECTION
- 5. ANY HABITABLE ROOM SHALL MEET ALL LIGHT/VENTILATION AND EGRESS AS REQUIRED BY N.C.S.R.B.C. 2018 EDITION, SECTIONS R-303.1
- 6. ALL EXTERIOR WALLS SHOWN ON FLOOR PLANS ARE 2X6 FRAME UNLESS NOTED OTHERWISE. ALL INTERIOR WALLS SHOWN ON FLOOR PLANS ARE 2X4 FRAME UNLESS NOTED OTHERWISE
- 7. ALL ANGLED WALLS SHOWN ON FLOOR PLANS ARE 45 UNLESS NOTED OTHERWISE.
- 8. ALL WINDOWS SHALL HAVE A MINIMUM DPI RATING OF 25. BUILDER SHALL VERIFY WITH WINDOW MANUFACTURER THAT UNITS INSTALLED MEET THESE REQUIREMENTS AS PER N.C.S.R.B.C., 2018 EDITION, TABLE
- 9. ENERGY EFFICIENCY REQUIREMENTS FOR THE SPECIFIC CLIMATE ZONE WHERE STRUCTURE IS BEING BUILT SHALL BE IN ACCORDANCE WITH CHAPTER 11 OF THE N.C.S.R.B.C., 2018 EDITION, AS SHOWN IN SECTION N1101.2

### MATERIALS LEGEND

| EARTH/COMPACT FILL   | FINISH WOOD     |
|----------------------|-----------------|
| CONCRETE             | ROUGH<br>WOOD   |
| BRICK                | BLOCKING        |
| CONCRETE BLOCK/STONE | PLYWOOD         |
| STEEL                | BATT INSULATION |
| ALUMINUM             | RIGID           |

### **TOILET ACCESSORIES LEGEND**

PROVIDE 2X4 BLOCKING IN THE WALL FOR THE FOLLOWING:

TOWEL BAR TOILET PAPER HOLDER

TOWEL RING MEDICINE CABINET

### RESIDENTIAL BUILDING CODE SUMMARY

- 1. PLANS ARE DESIGNED TO THE 2018 N.C.S.R.B.C
- 2. HOUSE IS DESIGNED FOR 115 MPH ULTIMATE DESIGN WIND SPEED (89 MPH NOMINAL
- 3. ANCHOR BOLTS SHALL BE MIN. 1/2" DIAMETER AND SHALL EXTEND 7" MIN. INTO MASONRY OR CONCRETE. BOLTS TO BE NO MORE THAN 6' O.C. AND WITHIN 12" FROM
- 4. MEAN ROOF HEIGHT: 28'-8"
- 5. COMPONENT & CLADDING DESIGNED FOR THE FOLLOWING LOADS:

| MEAN ROOF HGT: | <b>UP TO 30'</b> | 30'-1" TO 35' | 35'-1" TO 40' | 40'-1" TO 45' |
|----------------|------------------|---------------|---------------|---------------|
| ZONE 1         | 16.5,-18.0       | 17.3,-18.9    | 17.3,-18.9    | 17.3,-18.9    |
| ZONE 2         | 16.5,-21.0       | 17.3,-22.1    | 17.3,-22.1    | 17.3,-22.1    |
| ZONE 3         | 16.5,-21.0       | 17.3,-22.1    | 17.3,-22.1    | 17.3,-22.1    |
| ZONE 4         | 18.0,-19.5       | 18.9,-20.5    | 18.9,-20.5    | 18.9,-20.5    |
| ZONE 5         | 18.0,-24.1       | 18.9,-25.3    | 18.9,-25.3    | 18.925.3      |

- 6. MINIMUM VALUES FOR ENERGY COMPLIANCE: Zone 4
- 7. MAXIMUM GLAZING U-FACTOR: .35
- 8. INSULATING VALUES: CEILING: R-38 / WALLS: R-15 / FLOOR: R-19 SLABS: R-10. CODE REFERENCE: TABLE N1102.1

### AREA CALCULATIONS

| HEATED (SQ. FT.)                      |                            | UNHEATED (SQ. FT.)                                 |                          | UNFINISHED (SQ. FT.)                            |  |
|---------------------------------------|----------------------------|--|--------------------------|---|--|
| BASEMENT:<br>IST FLOOR:<br>PND FLOOR: | N/A<br>1163<br>687<br>1850 | GARAGE:<br>FRONT PORCH:<br>SCREEN PORCH:<br>TOTAL: | 260<br>113<br>100<br>473 | BASEMENT:<br>1ST FLOOR:<br>2ND FLOOR:<br>ATTIC: | N/A<br>N/A<br>128<br>N/A                 |
| TOTAL.                                | 1000                       | TOTAL.   | 473                      | TOTAL:  OVERALL DIMEN WIDTH: DEPTH:             | 128<br><u>ISIONS</u><br>44'-6"<br>56'-0" |

### FOUNDATION VENTILATION CALCULATIONS

(REFERENCE: N.C.S.R.B.C. 2018 EDITION SECTION R408)

NOT APPLICABLE WITH SLAB FOUNDATIONS

### ATTIC VENTILATION REQUIREMENTS

NATURAL ROOF VENTILATION CALCULATIONS | MECHANICAL ROOF VENTILATION CALCULATIONS

1536 SQ. FT. = 10.24 SQ. FT. VENT REQ'D BUILDER TO PROVIDE APPROPRIATE

VENTILATING AS REQUIRED PER CODE

1536 SQ. FT. = 5.12 SQ. FT. VENT REQ'D 300 BUILDER TO PROVIDE APPROPRIATE VENTILATING AS REQUIRED PER CODE






This document is property of Garman Homes Inc, and was prepared for their use only The plans, elevations illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes Inc. All right reserved and protected under federal law.

### Project Number Project Number Plan Number

### FP-1850

SER ELEVATION A LOT 0099 SERENITY

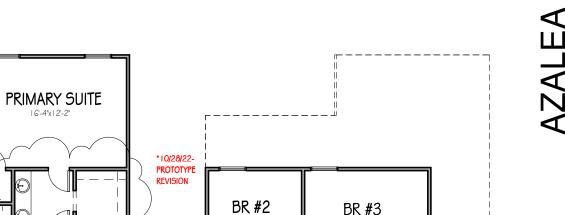

LOFT

UNFIN.

STORAGE

Drawn By MMH Checked By JM Date Drawn 4/8/20 **Revision Date** 7/1/20 4/5/22 10/28/22 1/31/23

LAUNDRY

**GARAGE** 

12'-2"x20'-4"

SCREEN

**PORCH** 

DINING


14'-2"x10'-2"

KITCHEN

**FAMILY** 14'-8"X15'-4"

**COVERED ENTRY** 

**XXX** 

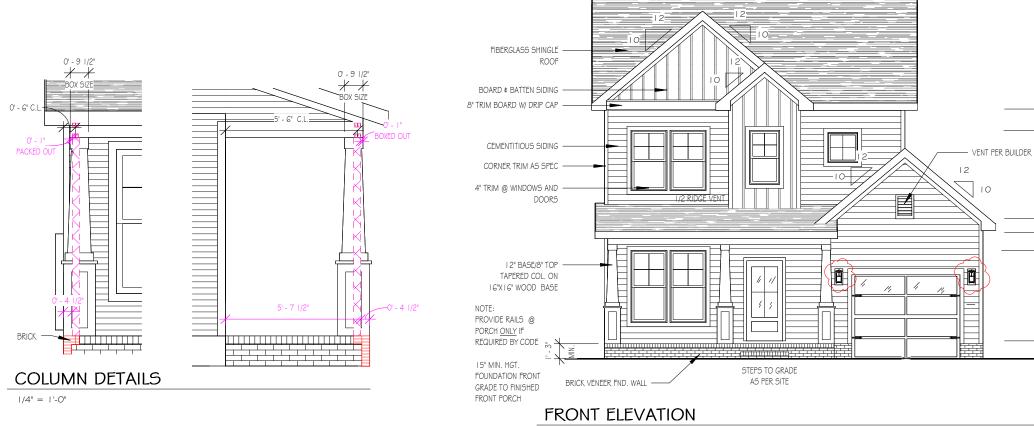

THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.

WINDOWS

WINDOWS

2ND FIN. FLR

IST FIN. FLR

(MAIN HOUSE)



This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.

Project Number
Project Number
Plan Number
FP-1850

# AZALEA SER ELEVATION A LOT 0099 SERENITY

Drawn By
MH
Checked By
CM
Date Drawn
4/8/20
Revision Date
7/1/20
4/5/22
10/28/22

Sheet

RIDGE VENT RIDGE VENT FIBERGLASS SHINGLE ROOF BOARD AND BAT SIDING RIDGE VENT 2ND FIN. FLR . CEMENTITIOUS SIDING · CORNER TRIM AS SPEC -12" BASE/8" TOP TAPERED COL. ON 16"X16" TREATED FRAMING WITH INSECT SCREEN WOOD BASE IST FIN. FLR. (MAIN HOUSE) NOTE - BUILDER TO SITE LOCATE PARGED FND. WALL DECK STEPS AS PER GRADE (MAIN HOUSE) BRICK VENEER FND. STEPS TO GRADE AS PER SITE WALL (PORCH) LEFT SIDE ELEVATION

I'\_O" NOTE - SLOPE ALL GRADES AWAY FROM HOUSE FOR POSITIVE DRAINAGE

RIDGE VENT



This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.

Project Number Project Number Plan Number

FP-1850

### SER ELEVATION A LOT 0099 SERENITY AZALEA

МН Checked By CM Date Drawn 4/8/20 Revision Date 7/1/20 4/5/22 10/28/22

Drawn By


Sheet

RIDGE VENT FIBERGLASS SHINGLE WINDOWS CEMENTITIOUS SIDING W/ ICE € 2ND FIN. FLR CORNER TRIM AS SPEC -WINDOWS BRICK MOLD ONLY @ DOORS PARGED FND. WALL -NOTE - BUILDER TO SITE LOCATE DECK STEPS AS PER GRADE

### **REAR ELEVATION**

1/8" = 1'-0"

NOTE - SLOPE ALL GRADES AWAY FROM HOUSE FOR POSITIVE DRAINAGE

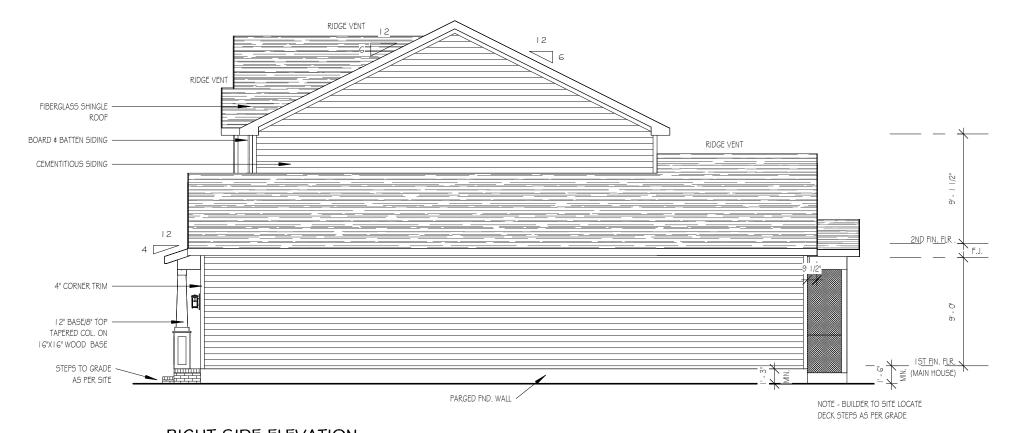

WINDOWS WITH CORNER LOTS ONLY

PROVIDE RAILS @ PORCH ONLY IF REQUIRED BY CODE

15" MIN. HGT. FOUNDATION FRONT GRADE TO FINISHED FRONT PORCH

RIGHT SIDE ELEVATION

1/8" = 1'-0"

FIRST FLOOR

1/8" = 1'-0"

31' - 6"

9'-0" CLG. HGT. U.N.O. SET WINDOWS @ 7'-6" U.N.O. N.C.S.R.B.C., 2018 EDITION

CORNER LOT WINDOWS

GBG (GRILLS BETWEEN GLASS) TO BE USED ON

THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.




This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.

Project Number
Project Number
Plan Number
FP-1850

## AZALEA SER ELEVATION A LOT 0099 SERENITY

| Drawn By      |
|---------------|
| MH            |
| Checked By    |
| CM            |
| Date Drawn    |
| 4/8/20        |
| Revision Date |
| 7/1/20        |
| 4/5/22        |
| 10/28/22      |
|               |
|               |
|               |
|               |
|               |
|               |
|               |
|               |
|               |
|               |

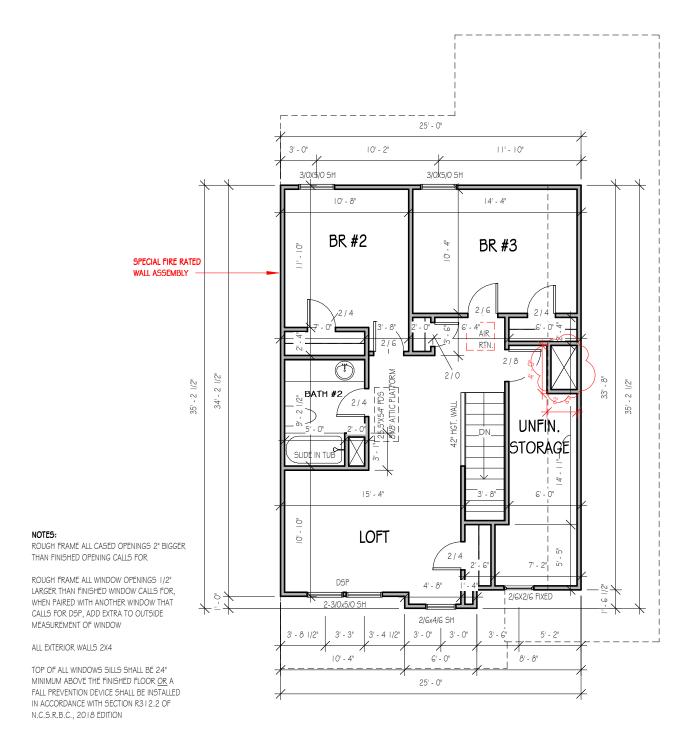

### SECOND FLOOR

1/8" = 1'-0"

9'-0" CLG. HGT. U.N.O. SET WNDOWS @ 7'-4" U.N.O. THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.




This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.

Project Number
Project Number
Plan Number
FP-1850

### AZALEA SER ELEVATION A LOT 0099 SERENITY

| Drawn By      |  |
|---------------|--|
| MH            |  |
| Checked By    |  |
| CM            |  |
| Date Drawn    |  |
| 4/8/20        |  |
| Revision Date |  |
| 7/1/20        |  |
| 4/5/22        |  |
| 10/28/22      |  |
|               |  |
|               |  |
|               |  |
|               |  |
|               |  |
|               |  |
|               |  |
|               |  |


She

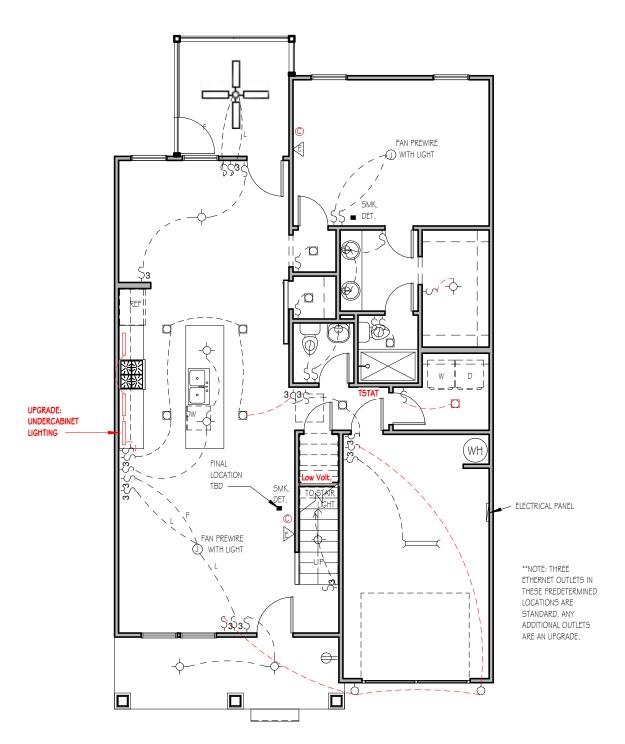

### FIRST FLOOR ELECTRICAL PLAN

1/8" = 1'-0"

NOTE - ELECTRICAL RECEPTACLE AND SWITCH QUANTITIES AND LOCATIONS SHOWN ON PLAN ARE FOR ILLUSTRATION PURPOSES ONLY. ACTUAL NUMBER AN D LOCATIONS SHALL BE FIELD DETERMINED AS PER CLIENT AND BUILDER EXCEPT WHERE CODE REQUIREMENTS APPLY.

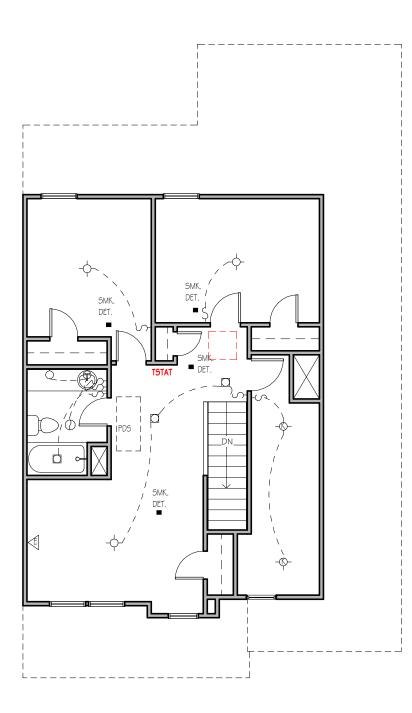

### SECOND FLOOR ELECTRICAL PLAN

1/8" = 1'-0"

NOTE - ELECTRICAL RECEPTACLE AND SWITCH QUANTITIES AND LOCATIONS SHOWN ON PLAN ARE FOR ILLUSTRATION PURPOSES ONLY. ACTUAL NUMBER AN D LOCATIONS SHALL BE FIELD DETERMINED AS PER CLIENT AND BUILDER EXCEPT WHERE CODE REQUIREMENTS APPLY.

THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.

ELECTRICAL LECEND



This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.

Project Number
Project Number
Plan Number
FP-1850


AZALEA
SER ELEVATION A
LOT 0099 SERENITY


-∳- - LIGHT FIXTURE O - PAVILISHT WE WATERPROOF OUTLET - RECESSED LIGHTING . SINGLE PULL GATCH & - D-MAY SMITCH & - 4-MAY SMITCH - philips selector A - нього цанть W - EYEDALL SPOTS DUPLEX RECEPTABLE (1697) - .220 VOLT WEGETTACLE SWITCHED RECEPTAGLE (TOP WIRE ONLY) **♦**, - GROUND FAULT CIRCUIT INTERRUPTOR CONTRACTOR - CLA FANCISHIPS - TRACK LIGHTS - Hukketsotikr Liestrike O - CABLE OVILET A - TELEPHONE OUTLET A - COMPUTER DATA CUILET M - DURGLAR ALARM - INTERSOM NOTE: ALL ELECTRICAL TO SE VERIFIED BY CONER/BULDER SCHORE ROUGH-IN.

| Draw  | n By    |     |  |
|-------|---------|-----|--|
| N     | Н       |     |  |
| Chec  | ked By  | /   |  |
| С     | М       |     |  |
| Date  | Draw    | n   |  |
| 4,    | /8/20   |     |  |
| Revis | ion Da  | ate |  |
| 7,    | 1/20    |     |  |
| 4,    | 5/22    |     |  |
| 10    | )/28/22 | 2   |  |
|       |         |     |  |
|       |         |     |  |
|       |         |     |  |
|       |         |     |  |
|       |         |     |  |
|       |         |     |  |
|       |         |     |  |
|       |         |     |  |

Sheet



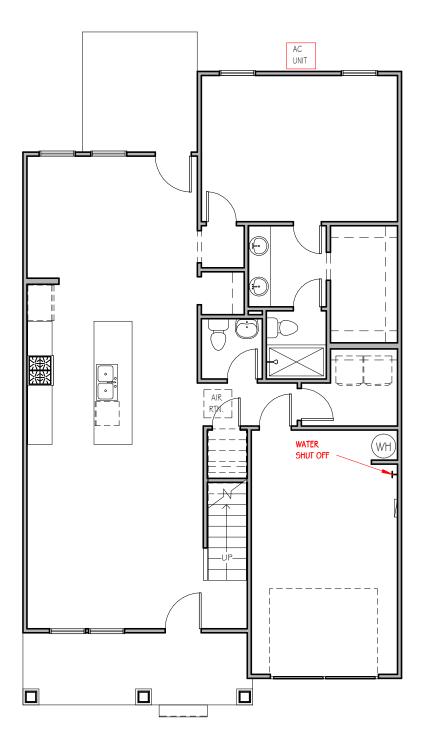

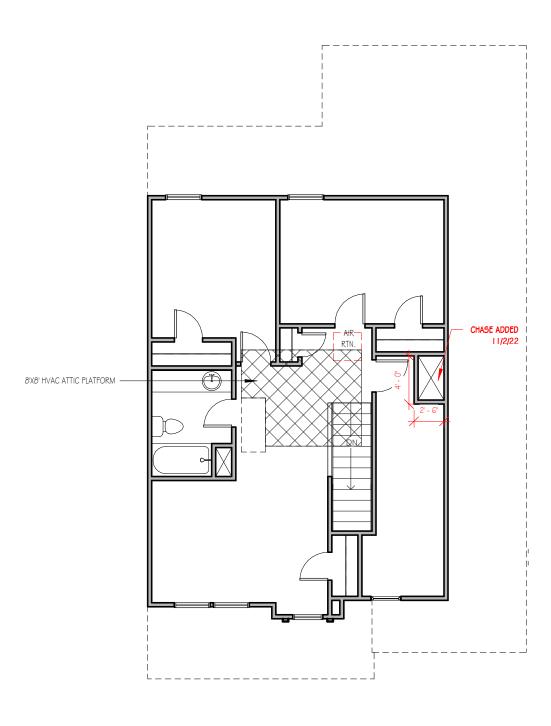

THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.



This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.


Project Number
Project Number
Plan Number
FP-1850

## AZALEA SER ELEVATION A LOT 0099 SERENITY

Drawn By
MH
Checked By
CM
Date Drawn
4/8/20
Revision Date
7/1/20
4/5/22
10/28/22

Shee

SECOND FLOOR MECHANICAL PAGE

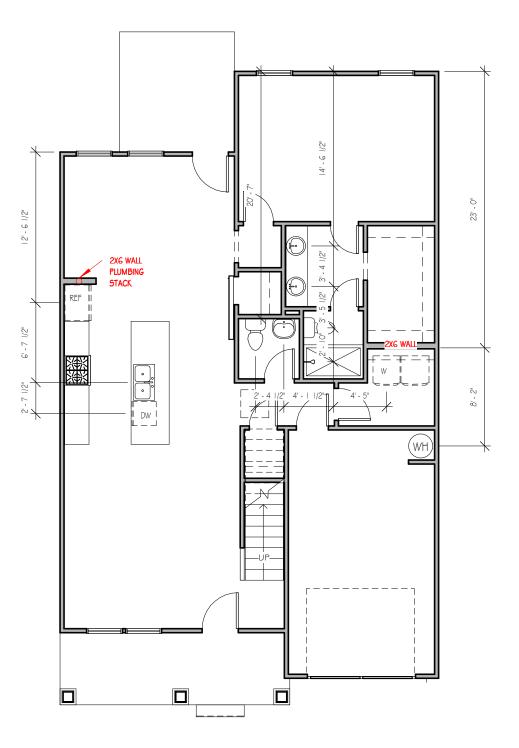

### FIRST FLOOR PLUMBING

1/8" = 1'-0"

THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.




This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.

### Project Number Project Number Plan Number FP-1850

# AZALEA SER ELEVATION A LOT 0099 SERENITY


| Dra  | wn By      |   |  |
|------|------------|---|--|
|      | MH         |   |  |
| Che  | cked By    |   |  |
|      | CM         |   |  |
| Date | Drawn      |   |  |
|      | 4/8/20     |   |  |
| Rev  | ision Date | е |  |
|      | 7/1/20     |   |  |
|      | 4/5/22     |   |  |
|      | 10/28/22   |   |  |
|      |            |   |  |
|      |            |   |  |
|      |            |   |  |
|      |            |   |  |
|      |            |   |  |
|      |            |   |  |
|      |            |   |  |
|      |            |   |  |
|      |            |   |  |

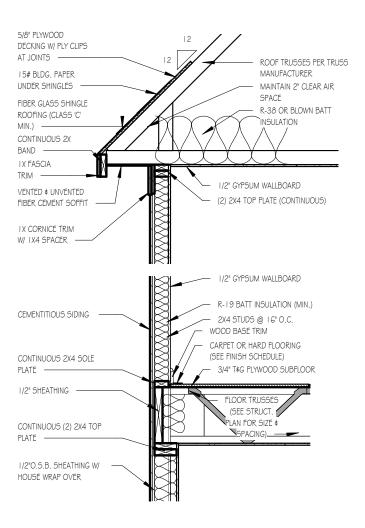

### TWO-STORY WALL SECTION

1/2" = 1'-0"

1/2" = 1'-0"

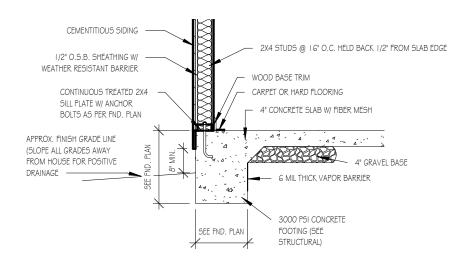


### FOUNDATION DETAIL - SLAB

1/2" = 1'-0"


1/2" FIRE-RATED PLYWOOD -DECKING W/ PLY CLIPS AT JOINTS EXTENDING AMIN. OF 4' AWAY FROM WALL ASSEMBLY ROOF TRUSSES PER TRUSS MANUFACTURER 15# BLDG. PAPER UNDER SHINGLES MAINTAIN 2" CLEAR AIR FIBER GLASS SHINGLE SPACE R-38 OR BLOWN BATT ROOFING (CLASS 'C' MIN.) INSULATION CONTINUOUS 2X BAND LX FASCIA TRIM 1/2" GYPSUM WALLBOARD 5'8" PLYWOOD SOFFIT, ALL SOFFITS CONNECTING TO THE (2) 2X4 TOP PLATE (CONTINUOUS) SPECIAL WALL AND A MIN. OF 4' OF CONNECTING POINT SHALL BE SEALED W/ TWO LAYERS OF FIRE-RATED PLYWOOD OR 5/8" EXTERIOR OR MOISTURE RESISTANT GYPSUM BOARD IX CORNICE TRIM W/ IX4 SPACER FIRE RATED OSB

### ROOF DETAIL SPECIAL FIRE-RATED WALLS

1/2" = 1'-0"

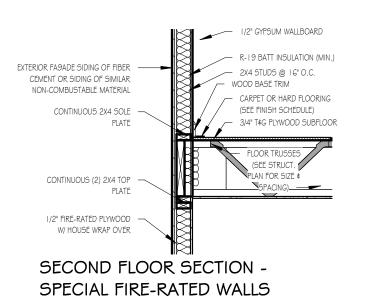

1/2" = 1'-0"



### LUG FOOTING


THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.



This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.

Project Number
Project Number
Plan Number

# I YPICAL DE LAIL SHEET SERENITY COLLECTION




FRONT PORCH COLUMNS
SUPPORT ATTACHMENT

1/2" = 1'-0"

| Drawn By      |  |
|---------------|--|
| MMH           |  |
| Checked By    |  |
| JM            |  |
| _Date Drawn   |  |
| 10/28/20      |  |
| Revision Date |  |
| 9/14/22       |  |
| 9/20/22       |  |
|               |  |
|               |  |
|               |  |
|               |  |
|               |  |
|               |  |
|               |  |
|               |  |
|               |  |
|               |  |
|               |  |
| Sheet         |  |

D

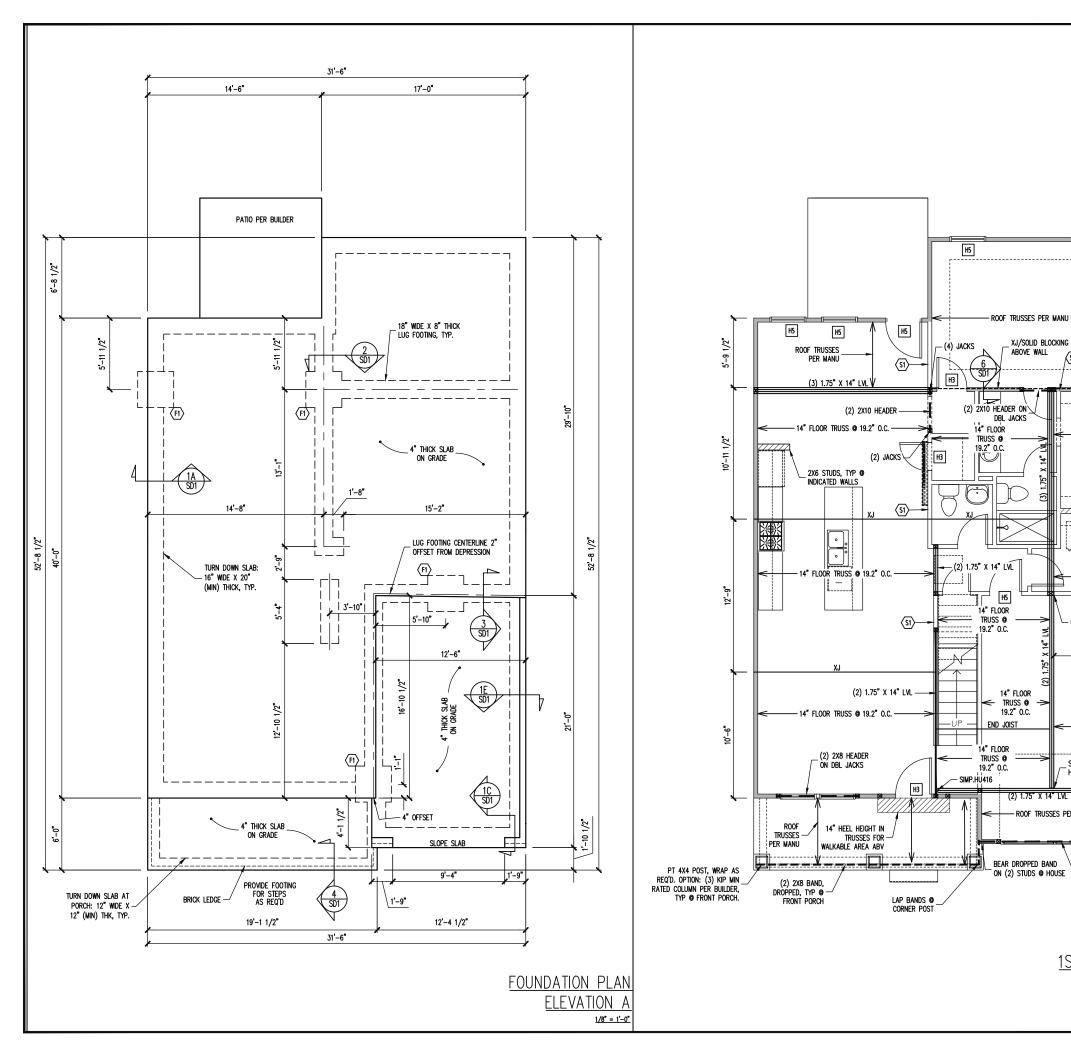

FRAMING SCEDULE

S1 INTERIOR LOAD BEARING WALL: SECURE TO THICKENED SLAB BELOW WITH 1/2" RED HEADER ANCHOR (OR EQUAL) @ 6'-0" O.C., 12" MAX FROM ENDS / CORNERS OF WALL, 7 MIN EMBEDMENT INTO SLAB BELOW.

### JOIST SUBSTITUTION

14" FLOOR TRUSSES PERMITTED TO BE SUBSTITUTED WITH 14" I-JOISTS.

MAINTAIN MINIMUM SPACING AS CALLED OUT ON PLANS.

SIMP. IUS/ITS3.56/14 HANGERS TO BE SUBSTITUTED WITH SIMP. IUS/ITS2.06/14 HANGER WHEN I-JOISTS HAVE BEEN INSTALLED.

### CONSTRUCTION SPECIFICATIONS INSTANT REFERENCES

REFER TO THE CONSTRUCTION SPECIFICATIONS SECTIONS FOR THE FOLLOWING INFORMATION:

PART 1.01: CURRENT GOVERNING CODE

PART 14: STUD SUPPORT FOR BEAMS

PART 17: KING STUDS FOR EXTERIOR WALLS

SEE DETAIL / CONSTRUCTION SPECIFICATIONS SHEETS FOR I-JOISTS ALLOWABLE SUBSTITUTIONS

### WALL BRACING

SHADED WALLS:

SD1

NOTE: ALL EXTERIOR

WALLS ARE BRACED WALLS PER WALL BRACING NOTES.

ROOF TRUSSES PER MANU

H5

(SI) WSP

(WH

PORTAL FRAME: (2)

1ST FLOOR FRAMING PLAN

**ELEVATION A** 

WALLS AND CEILING 1/8" = 1'-0"

2X12 HEADER ON

DBL JACKS

(4) STUDS

6'-6"

HU416

ROOF TRUSSES PER MANU

XJ/SOLID BLOCKING

ABOVE WALL

ALL EXTERIOR STUD WALLS, EXTERIOR SIDE, ARE TO BE CONTINUOUSLY SHEATHED WITH 7/16 APA RATED OSB NAILED TO STUDS WITH 8d NAILS @ 6" O.C. AT PANEL EDGES, 12" O.C. IN PANEL FIELD.

WSP - ONE SIDE OF INTERIOR WALL OR INSIDE OF EXTERIOR WALL WITH 3/8" MIN. THICKNESS WOOD STRUCTURAL PANFLING ATTACH WSP TO STUD WALL WITH 8d NAILS @ 4" O.C. AT PANEL EDGES, 8" O.C. IN PANEL FIELD.

NOTES:

PROVIDED CONTINUOUS SHEATHING = 164' MIN.

REFERENCE PART 16.02 OF CONSTRUCTION SPECIFICATIONS FOR GENERAL WIND BRACING INFORMATION.

### **HEADER SCHEDULE**

- SINGLE 2X4 TURNED FLAT (A)
- H2 (2) 2X4'S ON SINGLE JACKS (B)
- H3 (2) 2X10'S ON SINGLE JACKS (C)
- (2) 1.75" X 9.25" LVL'S ON DBL JACKS
- H5 (2) 2X8'S ON SINGLE JACKS
- TYPICAL FOR INTERIOR NON LOAD BEARING WALLS ONLY, ROUGH OPENING 38" MAX.
- TYPICAL FOR INTERIOR NON LOAD BEARING WALLS ONLY, ROUGH OPNG 38" TO 74" MAX.
- TYPICAL FOR ALL CONDITIONS NOT LISTED IN (A) OR (B) UNO.

-HEADERS IN NON LOAD BEARING INTERIOR
WALLS ARE NOT LABELED.

### FOUNDATION SCHEDULE

ENLARGE FOOTING TO 36" SQ. X 12" THK

-HEIGHT AND BACKFILL LIMITATIONS FOR FOUNDATION WALLS ARE TO BE GOVERNED BY THE NCSBC, LATEST EDITION.

STRUCTURAL ENGINEERS
License No. C-3870
W Millbrook Rd, Suite 201
leigh, North Carolina 27609
Phone (919) 844-1661 × eigh,

Engineering from Engine

only.

listed perm

plans are seal date

P.A. These r after the s

eering place

Engin takes


CTURAL ADDENDUM REV 1 | REV 2 | REV 3 ' FRESH PAINT TBD

ENG: NBG/CMC DATE: 4/29/2022

PROJECT NO. 22-30-058

> SHEET NO. S<sub>1</sub>A 1 of 6

property of permitting t the pro FOR 1 YEAR (this plan is the construction IG SEAL VALID FI ural design of th these plans if o ENGINEERING The structural liability for th

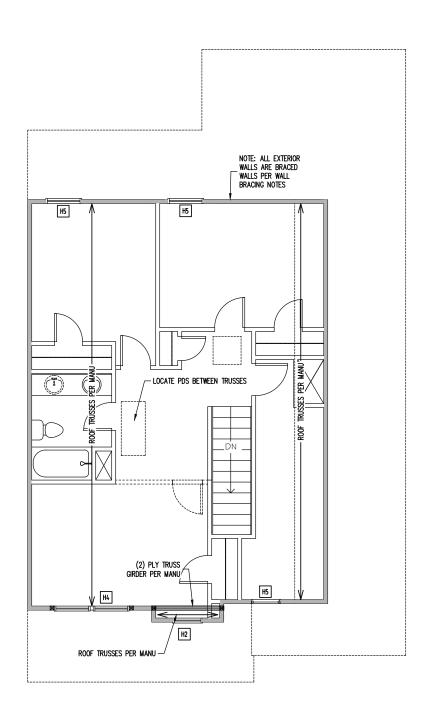

### TRUSS <u>UPLIFT CONNECTORS</u>

### EXPOSURE B. 120 MPH. ANY PITCH. 24" O.C. MAX ROOF TRUSS SPACING


TRUSSES SHALL BE ATTACHED TO SUPPORT WALL FOR UPLIFT
RESISTANCE CONTINUOUS OSB WALL SHEATHING BELOW PROVIDES
CONTINUOUS UPLIFT RESISTANCE TO FOUNDATION. ALL TRUSSES
SUPPORTED BY INTERMEDIATE SUPPORT WALLS, KNEEWALLS OR
BEAMS SHALL BE ATTACHED TO SUPPORTING MEMBER PER SCHEDULE
BELOW.

ROOF SPAN IS MEASURED HORIZONTALLY BETWEEN FURTHEST SUPPORT POINTS.

OVER 28'

ROOF SPAN UP TO 28'

OR (1) SIMPSON H3 CLIP TO SINGLE 2X4 PLATE

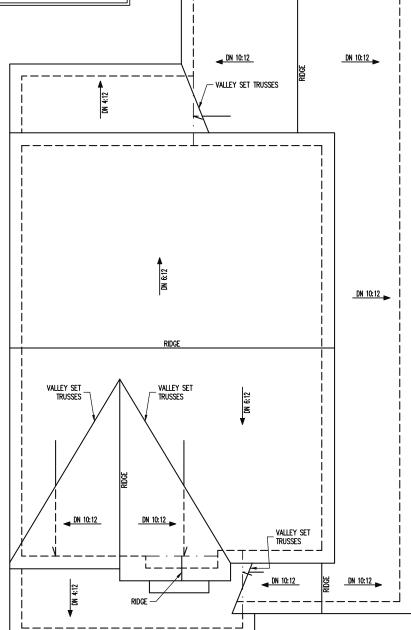

ROOF FRAMING PLAN **ELEVATION A** 1/8" = 1'-0"

### FRAMING NOTES

### -ROOF TRUSSES PER MANU. TYPICAL U.N.O. -VERIFY ALL KNEEWALL HEIGHTS, ROOF PITCHES, AND ARCHITECTURAL OVERHANGS PRIOR TO CONSTRUCTION

### CONSTRUCTION SPECIFICATIONS INSTANT REFERENCES

REFER TO THE CONSTRUCTION SPECIFICATIONS SECTIONS FOR THE FOLLOWING INFORMATION:

PART 1.01: CURRENT GOVERNING CODE

PART 14: STUD SUPPORT FOR BEAMS

PART 17: KING STUDS FOR EXTERIOR WALLS

### WALL BRACING

SHADED WALLS:

ALL EXTERIOR STUD WALLS, EXTERIOR SIDE, ARE TO BE CONTINUOUSLY SHEATHED WITH 7/16 APA RATED OSB NAILED TO STUDS WITH 8d NAILS @ 6" O.C. AT PANEL EDGES, 12" O.C. IN PANEL FIELD.

PROVIDED CONTINUOUS SHEATHING = 120' MIN.

SPECIFICATIONS FOR GENERAL WIND BRACING INFORMATION.

### HEADER SCHEDULE

- SINGLE 2X4 TURNED FLAT (A)
- (2) 2X4'S ON SINGLE JACKS (B)
- (2) 2X10'S ON SINGLE JACKS (C)
- H4 (2) 1.75" X 9.25" LVL'S ON DBL JACKS
- H5 (2) 2X8'S ON SINGLE JACKS
- TYPICAL FOR INTERIOR NON LOAD BEARING WALLS ONLY, ROUGH OPENING 38" MAX.
- TYPICAL FOR INTERIOR NON LOAD BEARING WALLS ONLY, ROUGH OPNG 38" TO 74" MAX.
- TYPICAL FOR ALL CONDITIONS NOT LISTED IN (A) OR (B) UNO.

-HEADERS IN NON LOAD BEARING INTERIOR WALLS ARE NOT LABELED.

STRUCTURAL ENGINEERS
License No. C-3870
318 W Millbrook Rd, Suite 201

Raleigh, North Carolina 27609

A. Phone (919) 844-1661

Engineering T from Engine

only.

listed perm

for the without

plans are

P.A. These r after the s

Engine takes

ENGINEERING The structural liability for th

STRUCTURAL ADDENDUM
TBD REV 1 NBG/CMC 6/20/2022
REV 2 NBG/CMC 9/2/2022
REV 3 11/28/2022 LOC:

VALID FOR 1 YEAR ONLY. sign of this plan is the property of plans if construction or permitting ENG: NBG/CMC DATE: 4/29/2022

PROJECT NO. 22-30-058


> SHEET NO. S2A


2 of 6

2ND FLOOR FRAMING PLAN


WALLS AND CEILING

1/8" = 1'-0"

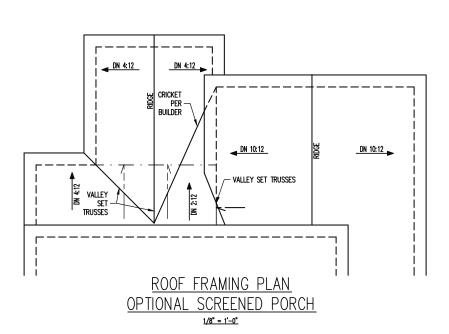



1ST FLOOR FRAMING PLAN OPTIONAL SCREENED PORCH WALLS AND CEILING 1/8" = 1'-0"

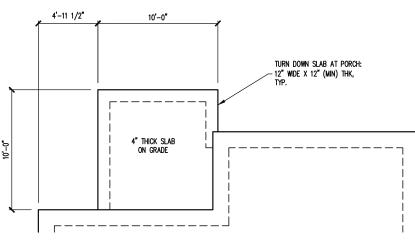

FOUNDATION PLAN
OPTIONAL SCREENED PORCH MONOSLAB **FOUNDATION** 1/8" = 1'-0"

| CARPILLIANO CARPILLIANO CONTRACTOR CARPILLIANO CARPILLI |
|--|
|  |

Associates, P.A. These plans are for the client listed only. Engineering Tech than 1 year after the seal date without written permission from Engineering

ENGINEERING SEAL VALID FOR 1 YEAR ONLY.

The structural design of this plan is the property of Engineering liability for these plans if construction or permitting takes place


SCOPE LOC PLAN: ENG: NBG/CMC

DATE: 4/29/2022

PROJECT NO. 22-30-058

> SHEET NO. S3A

3 of 6

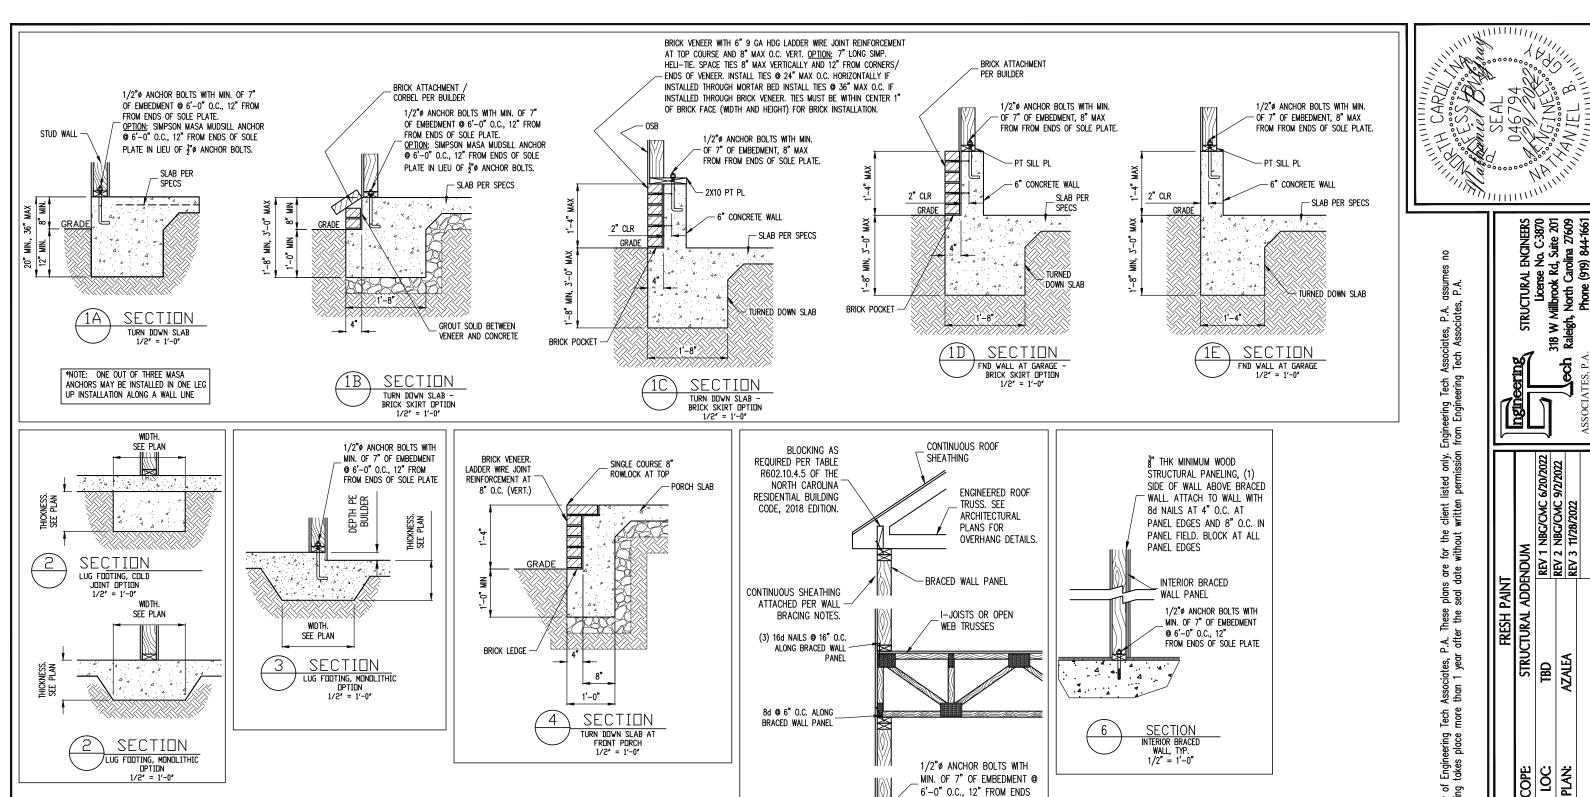

OF SOLE PLATE

YPICAL BRACED WALL PANEL CONNECTION
1/2" = 1'-0"

Engineering T from Enginee nglin only. listed permi client I for the without siates, P.A. These plans are 1 year after the seal date **FRESH PAINT** ICTURAL, **B** eering place Engine takes FA: <u>D FOR 1 YEAR ONLY.</u> f this plan is the property of E if construction or permitting to

NA NI


STRUCTURAL ENGINEERS
License No. C-3870
B W Millbrook Rd, Suite 201
aleigh, North Carolina 27609
Phone (919) 844-1661

ENG: NBG/CMC DATE: 4/29/2022

PROJECT NO. 22-30-058

SHEET NO.

SD1 5 of 6

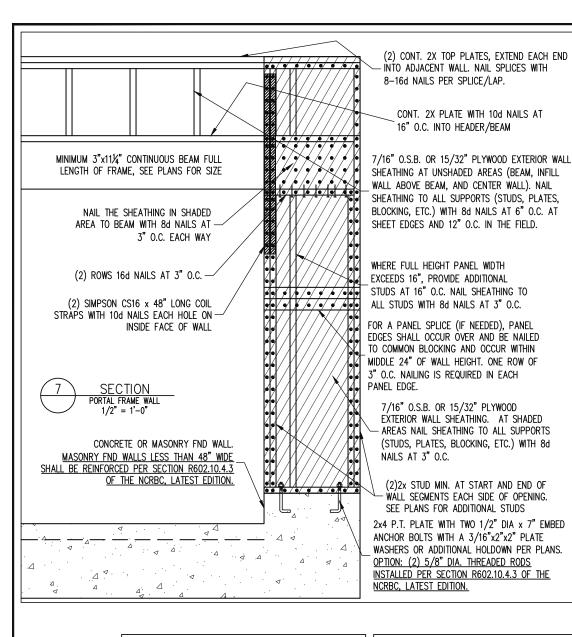

### ALLOWABLE I-JOIST SUBSTITUTION

NOTE: MAINTAIN JOIST DEPTH, DIRECTION, AND SPACING SPECIFIED ON

| MANUFACTURER  | DEPTH   | SERIES    | SIMPSON FACE<br>MOUNT HGR | SIMPSON TOP<br>FLANGE HGR |
|---------------|---------|-----------|---------------------------|---------------------------|
| BLUELINX      | 11.875" | BLI 40    | IUS2.56/11.88             | ITS2.56/11.88             |
| BOISE CASCADE | 11.875" | BCI 5000s | IUS2.06/11.88             | ITS2.06/11.88             |
| BOISE CASCADE | 11.875" | BCI 6000s | IUS2.37/11.88             | ITS2.37/11.88             |
| INTERNATIONAL | 11.875" | IB 400    | IUS2.56/11.88             | ITS2.56/11.88             |
| BEAMS         | 44.0757 | 101.00    | 11100 50 44 00            | ITO0 50 /44 00            |
| LP CORP       | 11.875" | LPI 20+   | IUS2.56/11.88             | ITS2.56/11.88             |
| NORDIC        | 11.875" | NI 40X    | IUS2.56/11.88             | ITS2.56/11.88             |
| ROSEBURG      | 11.875" | RFPI 40s  | IUS2.56/11.88             | ITS2.56/11.88             |
| WEYERHAEUSER  | 11.875" | TJI 210   | IUS2.06/11.88             | ITS2.06/11.88             |
| WEYERHAEUSER  | 11.875" | EEI-20    | IUS2.37/11.88             | ITS2.37/11.88             |
| DUUGUNY       | 14"     | DII 40    | IIICO EC /14              | ITCO EC /14               |
| BLUELINX      |         | BLI 40    | IUS2.56/14                | ITS2.56/14                |
| BOISE CASCADE | 14"     | BCI 5000s | IUS2.06/14                | ITS2.06/14                |
| BOISE CASCADE | 14"     | BCI 6000S | IUS2.37/14                | ITS2.37/14                |
| LP CORP       | 14"     | LPI 20+   | IUS2.56/14                | ITS2.56/14                |
| NORDIC        | 14"     | NI 40X    | IUS2.56/14                | ITS2.56/14                |
| ROSEBURG      | 14"     | RFPI 40s  | IUS2.56/14                | ITS2.56/14                |
| WEYERHAEUSER  | 14"     | TJI 210   | IUS2.06/14                | ITS2.06/14                |
| WEYERHAEUSER  | 14"     | EEI-20    | IUS2.37/14                | ITS2.73/14                |
|               |         |           |                           |                           |

JOISTS NOT LISTED IN THE ABOVE TABLE MAY BE USED PROVIDED THEY MEET OR EXCEED THE PROPERTIES OF THOSE LISTED. SUBSTITUTE USP BRAND HANGERS WITH EQUIVALENT VALUES AS DESIRED.

### **ABBREVIATIONS**

TJ TRIPLE JOIST TYPICAL

UNO UNLESS NOTED

XJ EXTRA JOIST

OTHERWISE

TRIPLE STUD POCKE

TRPL TRIPLE

| ABV   | ABOVE                | FND  | FOUNDATION       |
|-------|----------------------|------|------------------|
| В.    | BOTH                 | FTG  | FOOTING          |
| B.E.  | BOTH ENDS            | HDG  | HOT DIPPED       |
| BTWN  | BETWEEN              |      | GALVANIZED       |
| CIP   | CAST IN PLACE        | HGR  | HANGER           |
| CONC  | CONCRETE             | LVL  | LAMINATED VENEER |
| CS    | CONTINUOUS SHEATHING |      | LUMBER           |
| DIA   | DIAMETER             | NTS  | NOT TO SCALE     |
| DBL   | DOUBLE               | 0.C. | ON CENTER        |
| DJ    | DOUBLE JOIST         | PSL  | PARALLEL STRAND  |
| DSP   | DBL STUD POCKET      |      | LUMBER           |
| EQ    | EQUAL                | PT   | PRESSURE TREATED |
| EA    | EACH                 | QJ   | QUAD JOIST       |
| FLG   | FLANGE               | SP   | STUD POCKET      |
| FL PL | FLITCH PLATE         | SQ   | SQUARE           |
| FLR   | FL00R                |      |                  |
|       |                      |      |                  |

### NOTES

THE BUILDER IS RESPONSIBLE FOR REVIEWING PLANS PRIOR TO CONSTRUCTION. THE BUILDER SHALL IMMEDIATELY CONTACT THE ENGINEER OF RECORD (EOR) BEFORE PROCEEDING IF THE FOLLOWING CONDITIONS ARE NOTED BEFORE OR DURING CONSTRUCTION:

- 1) THE WORKING PLANS DO NOT BEAR THE SEAL OF THE EOR
- 2) THE PLANS CONTAIN DISCREPANT OR INCOMPLETE INFORMATION

ANY ERRORS DUE TO A FAILURE TO FOLLOW THE ABOVE PROCEDURES SHALL NOT BE THE RESPONSIBILITY OF THE EOR. FURTHERMORE, IT IS THE RESPONSIBILITY OF THE BUILDER TO ENSURE THAN ANY REVISIONS ISSUED BY THE EOR ARE PROMPLY DISTRIBUTED TO THE

THE EOR DOES NOT PERFORM FENESTRATION OR VENTING CALCULATIONS OR ANY OTHER CALCULATIONS THAT ARE NOT DIRECTLY RELATED TO STRUCTURAL ENGINEERING.

ROOF AND FLOOR TRUSSES TO BE DESIGNED BY AN ENGINEER REGISTERED BY THE STATE. FINAL TRUSS DRAWING SHOULD BE SUBMITTED TO THE EOR FOR REVIEW

### CONSTRUCTION SPECIFICATIONS

### PART 1: GENERAL

- 1.01 CONSTRUCTION SHALL MEET THE REQUIREMENTS OF THE NORTH CAROLINA RESIDENTIAL CODE, 2018 EDITION.
- 1.02 DIMENSIONS SHOWN SHALL GOVERN OVER SCALE ON THESE DRAWINGS.
- METHODS, PROCEDURES AND SEQUENCES OF CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR, WHO SHALL TAKE ALL NECESSARY PRECAUTIONS TO MAINTAIN AND INSURE THE INTEGRITY OF THE STRUCTURE AT ALL STAGES OF CONSTRUCTION.

### PART 2: DESIGN LOADS

2.01 DESIGN LOADS SHALL CONFORM WITH THE TABLE BELOW: USE

| ) 10               |
|--------------------|
| 0                  |
| 10                 |
| 10                 |
| 10 (15 FOR VAULTS) |
|                    |

LIVE LOAD (PSF) DEAD LOAD (PSF)

- Notes: individual stair treads are to be designed for the uniformly distributed Live Load of 40 psf or a 300 lb. concentrated Load acting over an area of 4 sq. whichever produces the greater stress.

   builder to verify dead load does not exceed 10 psf when heavy floor or
  - ROOF FINISHES SUCH AS TILE OR SLATE ARE UTILIZED. NOTIFY ENGINEERING UNDER
- 2.02 INTERIOR WALLS: 5 PSF LATERAL.
- 2.03 BASIC WIND DESIGN VELOCITY OF 120 MPH.
- 2.04 SOIL BEARING CAPACITY 2000 PSF (PRESUMPTIVE)

### PART 5: CONCRETE AND SLABS ON GRADE

- CAST IN PLACE CONCRETE SHALL BE OF NORMAL WEIGHT, 6% AIR ENTRAINMENT, AND SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI AT 28 DAYS TYP UNO. ALL CONCRETE, INCLUDING CONCRETE FOR FOOTINGS, IS TO BE CAST IN PLACE, TYP
- 5.02 REINFORCED CAST IN PLACE CONCRETE SHALL BE PROPORTIONED, MIXED AND PLACED IN ACCORDANCE WITH THE SPECIFICATIONS OF ACI 318, LATEST EDITION.
- SLABS ON GRADE, IF ANY, SHALL CONTAIN SYNTHETIC POLYPROPYLENE FIBRILLATED MICRO FIBERS, FIBER LENGTH 1 1/2", DOSAGE RATE 1 1/2 LBS/CU YD. SLAB TO BE PLACED ON A 6 MILL VAPOR BARRIER ON 2" MIN GRANULAR FILL ON SOIL WITH 90% MIN STANDARD PROCTOR DENSITY. VAPOR BARRIER MAY BE OMITTED FOR SLABS NOT

### PART 6: REBAR AND WIRE REINFORCEMENT

- REBAR SHALL BE DEFORMED STEEL CONFORMING TO ASTM A615 GRADE 60 TYP UNO
- 6.02 LAP SPLICES SHALL BE CLASS B AS DEFINED BY ACI 318, TYP UNO
- 6.03 WIRE REINFORCEMENT SHALL BE 9 GA AND SHALL CONFORM TO ASTM A1064.

- 7.01 CONCRETE MASONRY UNITS SHALL CONFORM TO ASTM C90 AND C55, NORMAL WEIGHT,
- 7.02 CLAY MASONRY UNITS SHALL CONFORM TO ASTM C62-17 GRADE SW
- 7.03 MORTAR SHALL BE TYPE S. MORTAR AND GROUT SHALL CONFORM TO ASTM C476, MIN COMPRESSIVE STRENGTH OF 2000 PSI.
- 7.04 MASONRY CONSTRUCTION SHALL CONFORM TO THE SPECIFICATIONS OF ACI 530
- 7.05 LADDER WIRE REINFORCEMENT SHALL CONFORM TO ASTM A951. 6" MIN LAPS FOR CONTINUOUS WALL APPLICATIONS

### PART 8: BOLTS AND LAG SCREWS

8.03 ANCHOR RODS AND BOLTS SHALL CONFORM TO ASTM F1554-15 GRADE 36 UNO. BENT ANCHOR BOLTS SHALL HAVE A 2" MIN HOOK UNO

### PART 9: DRIVEN FASTENERS

9.01 NAILS, SPIKES AND STAPLES SHALL CONFORM TO ASTM F 1667- 05. NAILS ARE TO BE COMMON WIRE OR BOX

### PART 10: DIMENSIONAL LUMBER

10.01 SOLID SAWN WOOD FRAMING DESIGN IS BASED ON NO. 2 SPRUCE PINE FIR <u>OR</u> SYP #2 FOR JOISTS, RAFTERS, GIRDERS, BEAMS, STUDS, ETC.

- 11.01 LVL OR PSL MINIMUM ALLOWABLE DESIGN STRESSES ARE AS FOLLOWS: E= 1.9 X 10E6 PSI, Fb = 2600 PSI, Fc = 285 PSI, Fc = 750 PSI LSL MINIMUM ALLOWABLE DESIGN STRESSES ARE AS FOLLOWS: E= 1.3 X 10E6 PSI, Fb = 1700 PSI, Fv = 400 PSI, Fc = 680 PSI
- 11.02 LVL OR PSL MEMBERS MAY BE RIPPED FROM DEEPER MEMBERS TO MATCH THE MEMBER DEPTH SPECIFIED IN THE PLANS

### PART 12: PRESSURE TREATED LUMBER

LUMBER IN CONTACT WITH THE GROUND, CONCRETE OR MASONRY SHALL BE PRESSURE TREATED IN ACCOPDANCE WITH AWPA STANDARD C-15. ALL OTHER EXPOSED LUMBER SHALL BE TREATED IN ACCORDANCE WITH AWPA STANDARD C-2 OR BY ANY METHOD GIVING EQUAL PROTECTION. THE BUILDING CODE OFFICE MAY ALSO APPROVE A NATURAL 2.01 DECAY RESISTANT WOOD PER SECTION 19-6(A)

### PART 14: STUD SUPPORTS FOR BEAMS

- 14.01 STEEL, ENGINEERED LUMBER, AND FLITCH PLATE BEAMS BEARING ON A STUD WALL SHALL BEAR AS FOLLOWS:
- 1-When the Beam is perpendicular to, or skewed relative to the wall, the beam shall bear <u>full width</u> on the supporting wall indicated and shall be supported by a minimum of three ganced studs, or a ganced stud column with a number of studs such that the stud column is at least as wide as the true width of the beam being supported, whichever is greater, typ und. For the skewed TION PARTICULAR CARE SHALL BE TAKEN TO ENSURE STUD COLUMN IS CENTERED ON
- 2-REAMS BEARING ONTO THE FND OF A STUD WALL PARALLEL TO THE BEAM. SHALL BEAR A MINIMUM OF 4 1/2" ONTO THE WALL AND BE SUPPORTED BY A TRPL STUD GANGED
- 14.02 DIMENSIONAL LUMBER BEAMS BEARING ON A STUD WALL SHALL BEAR AS FOLLOWS:
- 1-WHEN THE REAM IS PERPENDICULAR TO OR SKEWED RELATIVE TO THE WALL. THE REAM FOR A CONTINUOUS RIM JOIST WHERE APPLICABLE) AND SHALL BE SUPPORTED BY A TO BE SUPPORTED BY (3) STUDS), FOR THE SKEWED CONDITION PARTICULAR CARE SHALL BE TAKEN TO ENSURE STUD COLUMN IS CENTERED ON THE BEAM
  2-BEAMS BEARING ONTO THE END OF A STUD WALL PARALLEL TO THE BEAM SHALL BEAR
- MINIMUM OF 3" ONTO THE WALL AND BE SUPPORTED BY A DBL STUD GANGED COLUMN
- 14.03 Extra joists bearing on a stud wall perpendicular to or skewed relative to the beam shall be supported by one additional stud.
- STUDS THAT ARE GANGED TO FORM A COLUMN SHALL HAVE ADJACENT STUDS WITHIN THE COLUMN NAILED TOGETHER WITH ONE ROW OF 10d NAILS AT 8" O.C. (TWO ROWS OF 10d NAILS @ 8" O.C., 3" APART, FOR 2X8 OR 2X10 STUDS) ALL COLUMNS SHALL BE CONTINUOUS DOWN TO THE FOUNDATION OR OTHER PROPERTY DESIGNED
  STRUCTURAL ELEMENT SUCH AS A BEAM. COLUMNS TRANSFERRING LOADS THROUGH
  FLOOR LEVELS SHALL BE SOLIDLY BLOCKED FOR THE FULL WIDTH OF THE STUD COLUMN
  WITHIN THE CANTY CORDER DRY THE WITHIN THE CAVITY FORMED BY THE

### PART 15: NAILING OF MULTI PLY WOOD BEAMS

- SOLID SAWN LUMBER JOISTS THAT ARE GANGED TO FORM A BEAM SHALL HAVE ADJACENT MEMBERS IN THE BEAM NAILED TOGETHER WITH THREE ROWS OF 10d NAILS @ 16" O.C. FOR 2X10 OR LARGER, TWO ROWS OF 10d NAILS @ 16" O.C. FOR 2X8, ONE ROW OF 10d NAILS @ 16" O.C. FOR 2X6 OR SMALLER. STAGGER ROWS 5" MIN.
- LVL MEMBERS THAT ARE GANGED TO FORM A BEAM SHALL HAVE ADJACENT MEMBERS IN THE BEAM FASTENED TOGETHER PER MANUFACTURERS RECOMMENDATIONS, TYP

### PART 16: WALL FRAMING AND BRACING

STUD WALLS SHALL CONSIST OF 2X4 STUDS SPACED AT 16" O.C. UNO. STUDS SHALL BE CONTINUOUS FROM SOLE PLATE AT FLOOR TO DOUBLE TOP PLATE AT THE CEILING OR ROOF. NO INTERMEDIATE BANDS OR PLATES SHALL CAUSE DISCONTINUITIES IN A 16.01 STUD WALL EXCEPT AS REQUIRED FOR DOOR OR WINDOW OPENINGS. THE KING STUDS
FOR SUCH OPENINGS SHALL BE CONTINUOUS, TYP UNO.

MAX ALLOWABLE WALL HEIGHTS FOR EXTERIOR STUD WALLS, WITH SOLE PLATE

MAX ALLOWABLE WALL HEIGHTS FOR EXTENDED STOD WALLS, WITH SOLE PLATE
AND DBL TOP PLATE AND 7/16" OSB EXTERIOR BRACING AND ROW OF 2X4 /
2X6 PURLINS AT 8" HEIGHT (AND AT 16" HEIGHT FOR TALL WALLS), TYP UNO:
2X4 ● 16" O.C.: 11"-0" 2X6 ● 16" O.C.: 17"-0"

DBL 2X4 ● 16" O.C.: 13"-4" DBL 2X6 ● 16" O.C.: 21"-0"

16.02 FOR WALL BRACING THE FOLLOWING SHALL APPLY -BLOCKING AT UNSUPPORTED PANEL EDGES IS REQUIRED TYP UNO.
-WALL BRACING IS BY ENGINEERED DESIGN AND NOT PRESCRIPTIVE PER SECTION
602.10 OF THE 2018 NCRC. CONTINUOUS SHEATHING HAS BEEN PROVIDED, ALONG WITH ALTERNATIVE METHODS TO INSURE THE MINIMUM INTENT OF SECTION 602.10 OF THE 2018 NCRC HAS BEEN MET AND EXCEEDED.

-Braced Wall Panels shall be fastened in accordance with Table 602.3(1) to PROVIDE CONTINUOUS PANEL UPLIET RESISTANCE AND COMPULANCE WITH NCRBC R602.3.5 AND R802.11 UNLESS NOTED OTHERWISE ON STRUCTURAL PLANS.

-MAY SUBSTITUTE WSP FOR G8

-SINGLE JOIST, CONTINUOUS RIM JOIST, OR BLOCKING OF EQUAL DEPTH IS REQUIRED ABOVE AND BELOW ALL BRACED WALLS. NAIL BLOCKING ABOVE WALL TO TOP PLATE WITH 16d TOE NAILS @ 6" O.C. NAIL SOLE PLATE OF BRACED WALL TO BLOCKING BELOW WITH (3) 16d NAILS @ 16" O.C. BLOCKING AT HORIZONTAL JOINTS IN BRACED WALL LINES ONLY REQUIRED AT SHADED WALLS, UNO.

### PART 17: KING STUDS

17.01 KING STUDS FOR OPENINGS IN EXTERIOR WALLS SHALL BE AS FOLLOWS:

| MAX OPENING WIDTH |            | 5'-0" | NUMBE<br>9'-0" | R OF KIN<br>13'-0" | g studs<br>17'-0" | 21'-0" |
|-------------------|------------|-------|----------------|--------------------|-------------------|--------|
| STUD SIZE         | 2X4<br>2X6 | 1     | 2              | 3<br>2             | 4 2               | 5 2    |
|                   | 2X8        | 1     | 1              | 1                  | 1                 | 2      |

### PART 18: SUBSTITUTIONS

MATERIAL OR MEMBER SIZE SUBSTITUTIONS OR PLAN DEVAITONS REQUIRE THE WRITTEN AUTHORIZATION OF THE DESIGNERS. UNAUTHORIZED DEVAITONS ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.

### PART 19: OWNERSHIP OF STRUCTURAL DESIGN

THE STRUCTURAL DESIGN OF THIS PLAN IS THE PROPERTY 19.01 OF ENGINEERING TECH ASSOCIATES (ETA). THESE PLANS ARE FOR THE ONE TIME USE AT THE LOCATION INDICATED AND FOR THE CLIENT LISTED. ETA ASSUMES NO LIABILITY FOR THESE PLANS IF THEY ARE REPRODUCED, IN WHOLE OR

STRUCTURAL ENGINERS
License No. C:3870
W Millbrook Rd, Suite 201
leigh, North Carolina 27609
Phone (919) 844-1661

2

eering Engine Engine from only. ission listed perm for the without plans are seal date These r the P.A. That eering place Engin takes property of permitting t the pro R 1 YEAR plan is tl nstruction FOR this r VALID Faign of the plans if ق يَ

ENG: NBG/CMC DATE: 4/29/2022

FRESH CTURAL

> PROJECT NO. 22-30-058

50

SHEET NO. SD2

7 2 8

6 of 6