

* FD to Remove Path water

SOUTHEASTERN SOIL & ENVIRONMENTAL ASSOC., INC.

* check soils

PROPOSED SUBSURFACE WASTE DISPOSAL SYSTEM DETAIL SHEET

SUBDIVISION: Liberty Meadow

LOT ~~2~~ → 3

INITIAL SYSTEM: GRAV APPROVED 25% REDUCTION

REPAIR GRAV Approved 25% Reduction

DISTRIBUTION: SERIAL

DISTRIBUTION SERIAL

BENCHMARK: 100.0

LOCATION T.O.S FC 28/29

NO. BEDROOMS: 3

LTAR 0.35 gpcd

	LINE	FLAG COLOR	ELEVATION	LENGTH
I }	1	G	96.92	50
	2	P	96.75	95
	3	G	96.25	90
	4a	P	95.93	35
				<u>260</u>
II }	4b	P	95.93	65
	5	G	95.50	100
	6	P	95.09	100
				<u>265 AVAILABLE</u>

BY B.C. Raynor

DATE 12/21/2021

TYPICAL PROFILE

THERE SHALL BE NO GRADING,

0-20 LS vfri gran

CUTTING, LOGGING OR OTHER SOIL

20-36 sll firm SBK

DISTURBANCE IN SEPTIC AREA

mixed red pm mottles 26"
path

HEALTH DEPARTMENT USE ONLY.

DESIGNS DO NOT GUARANTEE FUNCTIONALITY


Liberty Meadows

Lot ~~27~~ & ~~28~~

30 + 31

solution US.

0
4
5
R

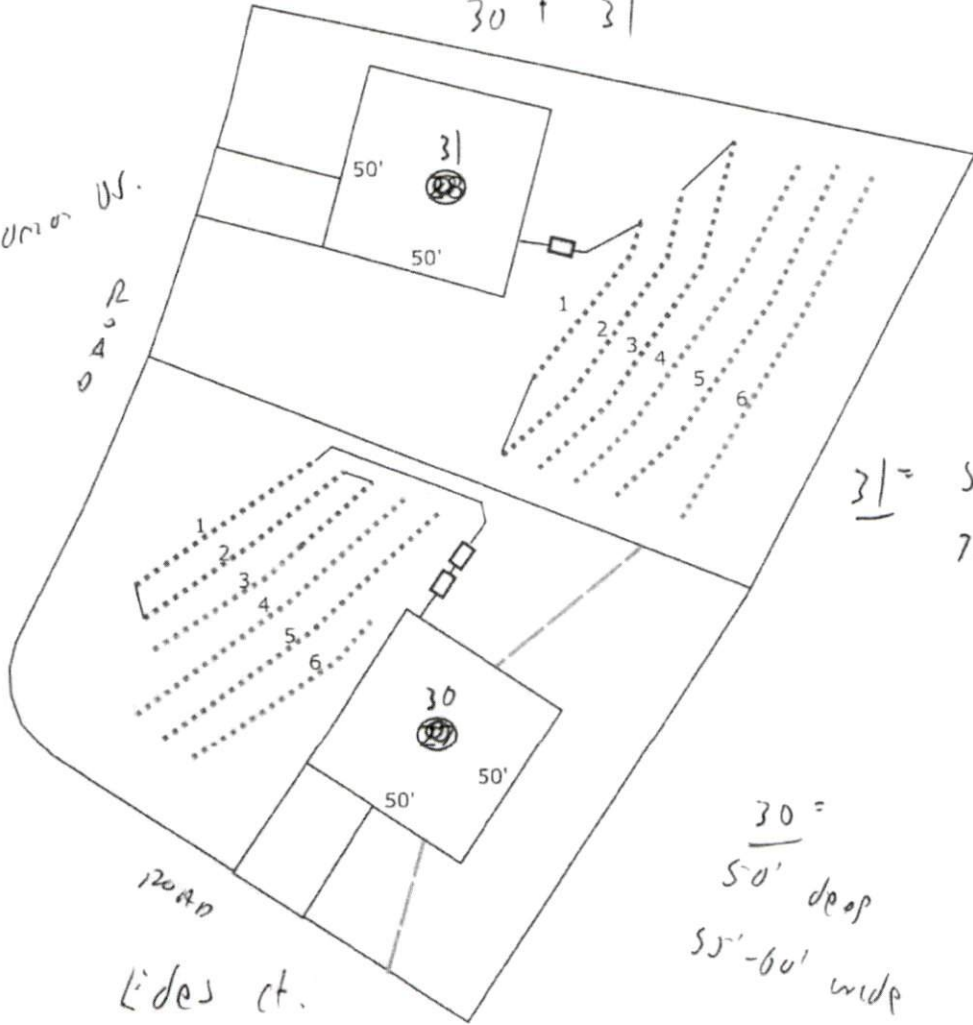

31 = 50' deep
70' wide

30 =
50' deep
55'-60' wide

road

Lides ct.