
Harnett County Department of Public Health

Improvement Permit

A building permit cannot be issued with only an Improvement Permit PROPERTY LOCATION: 103 Solomon Dr SUBDIVISION Liberty Meadows ISSUED TO: A&G Residential REPAIR EXPANSION Site Improvements required prior to Construction Authorization Issuance: Type of Structure: SFD (40'x38') Proposed Wastewater System Type: Pump to 25% Red Projected Daily Flow: 480 Number of bedrooms: 4 Number of Occupants: 8 Basement Yes ☐ No Pump Required: XYes May be required based on final location and elevations of facilities Type of Water Supply: Community Public Well Distance from well ______feet X Five years Permit valid for: No expiration Permit conditions: Date: 4/21/23 Authorized State Agent:: SEE ATTACHED SITE SKETCH The issuance of this permit by the Health Department in no way guarantees, the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit. Construction Authorization (Required for Building Permit) The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout. ISSUED TO: A&G Residential PROPERTY LOCATION: 103 Solomon SUBDIVISION Liberty Meadows LOT # 52 Facility Type: SFD (40'x38') Expansion Repair Basement Fixtures? | Yes Basement? Yes Pump to 25% Reduction System (Initial) Wastewater Flow: 480 Type of Wastewater System** (See note below, if applicable) Pump to 25% Red Sys Number of trenches 1 Installation Requirements/Conditions Septic Tank Size 1000 gallons Exact length of each trench 300 Trench Spacing: 9 Feet on Center Pump Tank Size 1000 Trenches shall be installed on contour at a Soil Cover: 6 Maximum Trench Depth of: 18 inches (Maximum soil cover shall not exceed (Trench bottoms shall be level to +/-1/4" 36" above the trench bottom) in all directions) Pump Requirements: ft. TDH vs. ___ inches below pipe inches above pipe WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA. NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA. **If applicable: Lunderstand the system type specified is different from the type specified on the application. Laccept the specifications of this permit, Owner/Legal Representative Signature: This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH Date: 4/21/23 Authorized State Agent: _ Construction Authorization Expiration Date: 4/21/28

1" = 40'

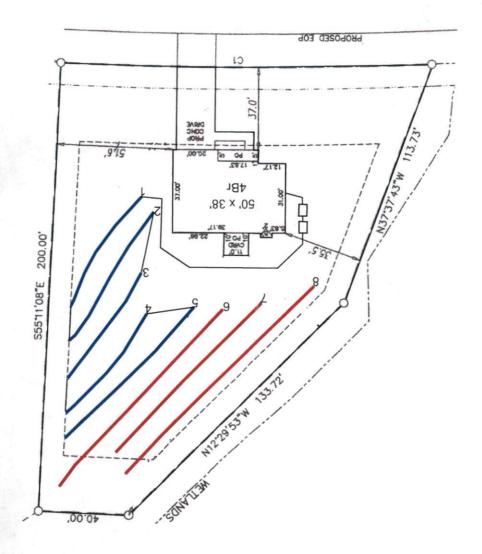

CALCALA HARIAN

SOUTHEASTERN SOIL & ENVIRONMENTAL ASSOC., INC.

PROPOSED SUBSURFACE WASTE DISPOSAL SYSTEM DETAIL SHEET

SUBDIVISION: Liberty Meadow Pump INITIAL SYSTEM: APPROVED 25% REDUCTION DISTRIBUTION: SCRIAL			REPAIR Approved 25% Red DISTRIBUTION SERTAL				
				BENCHMARK: 100.0 NO. BEDROOMS: 4			LOCATION Front Right plaste LTAR 0.4 ggd/ft ²
LINE	FLAG COLOR	ELEVATION	LENGTH				
1	4	99.50	50				
2	P	98.00	50				
3	0	97.75	55-				
4	4	97.60	60				
5	P	96.59	95				
			300				
1.	0	96.17	105				
7	Ч	95.59	90				
P	P	94.75	110_				
			305				
BY B.C. Raynor		DATE 04/03/2023					
TYPICAL PROFILE			THERE SHALL BE NO GRADING,				
0-29	sl fri gran		CUTTING, LOGGING OR OTHER SOIL				
0-29 SI fri gran 29-42 SCL firm SBK			DISTURBANCE IN SEPTIC AREA				
	n2 ≥ 30"	automator.	HEALTH DEPARTMENT USE ONLY.				
			DESIGNS DO NOT GURANTEE FUNCTIONALITY				