### Residence for

### Garman Homes Lot 0102 Serenity Fuquay Varina, North Carolina

### **INDEX TO DRAWINGS**

### COVER SHEET

- FRONT & LEFT SIDE ELEVATIONS
- **REAR & RIGHT SIDE ELEVATIONS**
- FIRST & SECOND FLOOR PLANS
- FIRST & SECOND FLOOR ELECTRICAL PLANS
- FIRST & SECOND FLOOR MECHANICAL PLANS
- FIRST FLOOR PLUMBING PLAN
- CONSTRUCTION DETAILS

- FOUNDATION PLAN CRAWLSPACE STANDARD
- FIRST FLOOR FRAMING PLAN
- SECOND FLOOR FRAMING PLAN PULL DOWN STAIR STANDARD
- ROOF FRAMING PLAN STRUCTURAL DETAILS
- SD2 SD3 STRUCTURAL DETAILS
- STRUCTURAL DETAILS
- CONSTRUCTION SPECIFICATIONS

### **GENERAL NOTES**

- 1. ALL WORK TO BE DONE IN STRICT ACCORDANCE WITH NORTH CAROLINA STATE RESIDENTIAL BUILDING CODE, 2018 EDITION (HEREWITH SHOWN AS N.C.S.R.B.C.).
- 2. DIMENSIONS SHOWN ON DRAWINGS GOVERN OVER SCALE.
- 3. STUD WALL DESIGN SHALL CONFORM TO ALL N.C.S.R.B.C.
- 4. CONTRACTOR SHALL USE TEMPERED SAFETY GLASS IN ALL LOCATIONS AS REQUIRED BY N.C.S.R.B.C., 2018 EDITION, SECTION
- 5. ANY HABITABLE ROOM SHALL MEET ALL LIGHT/VENTILATION AND EGRESS AS REQUIRED BY N.C.S.R.B.C. 2018 EDITION, SECTIONS R-303.1
- 6. ALL EXTERIOR WALLS SHOWN ON FLOOR PLANS ARE 2X6 FRAME UNLESS NOTED OTHERWISE. ALL INTERIOR WALLS SHOWN ON FLOOR PLANS ARE 2X4 FRAME UNLESS NOTED OTHERWISE
- 7. ALL ANGLED WALLS SHOWN ON FLOOR PLANS ARE 45 UNLESS NOTED OTHERWISE.
- 8. ALL WINDOWS SHALL HAVE A MINIMUM DPI RATING OF 25. BUILDER SHALL VERIFY WITH WINDOW MANUFACTURER THAT UNITS INSTALLED MEET THESE REQUIREMENTS AS PER N.C.S.R.B.C., 2018 EDITION, TABLE
- 9. ENERGY EFFICIENCY REQUIREMENTS FOR THE SPECIFIC CLIMATE ZONE WHERE STRUCTURE IS BEING BUILT SHALL BE IN ACCORDANCE WITH CHAPTER 11 OF THE N.C.S.R.B.C., 2018 EDITION, AS SHOWN IN SECTION N1101.2

### MATERIALS LEGEND

	EARTH/COMPACT FILL	FINISH WOOD
A - A	CONCRETE	ROUGH WOOD
	BRICK	BLOCKING
	CONCRETE BLOCK/STONE	PLYWOOD
	STEEL	BATT INSULATION
	ALUMINUM	RIGID INSULATION

### **TOILET ACCESSORIES LEGEND**

PROVIDE 2X4 BLOCKING IN THE WALL FOR THE FOLLOWING

TOWEL BAR TOILET PAPER HOLDER

TOWEL RING MEDICINE CABINET

### RESIDENTIAL BUILDING CODE SUMMARY

- 1. PLANS ARE DESIGNED TO THE 2018 N.C.S.R.B.C.
- 2. HOUSE IS DESIGNED FOR 115 MPH ULTIMATE DESIGN WIND SPEED (89 MPH NOMINAL
- 3. ANCHOR BOLTS SHALL BE MIN. 1/2" DIAMETER AND SHALL EXTEND 7" MIN. INTO MASONRY OR CONCRETE. BOLTS TO BE NO MORE THAN 6' O.C. AND WITHIN 12" FROM
- 4. MEAN ROOF HEIGHT: 28'-10"
- 5. COMPONENT & CLADDING DESIGNED FOR THE FOLLOWING LOADS:

MEAN ROOF HGT:	UP TO 30'	30'-1" TO 35'	35'-1" TO 40'	40'-1" TO 45'
ZONE 1	16.5,-18.0	17.3,-18.9	17.3,-18.9	17.3,-18.9
ZONE 2	16.5,-21.0	17.3,-22.1	17.3,-22.1	17.3,-22.1
ZONE 3	16.5,-21.0	17.3,-22.1	17.3,-22.1	17.3,-22.1
ZONE 4	18.0,-19.5	18.9,-20.5	18.9,-20.5	18.9,-20.5
ZONE 5	18.0,-24.1	18.9,-25.3	18.9,-25.3	18.9,-25.3

- 6. MINIMUM VALUES FOR ENERGY COMPLIANCE: Zone 4
- 7. MAXIMUM GLAZING U-FACTOR: .35
- 8. INSULATING VALUES: CEILING: R-38 / WALLS: R-15 / FLOOR: R-19 SLABS: R-10. CODE REFERENCE: TABLE N1102.1

### AREA CALCULATIONS LINHEATED (SOLET)

HEATED (SQ. FT.)		UNHEATED (SC	Q. FT. <u>)</u>	UNFINISHED (SQ. FT.)	
BASEMENT: 1ST FLOOR: 2ND FLOOR:	N/A 1163 702	GARAGE: FRONT PORCH: PATIO:	260 112 100	BASEMENT: 1ST FLOOR: 2ND FLOOR: ATTIC:	N/A N/A 132 N/A
TOTAL:	1865	SCREEN PORCH: (OPTIONAL)	N/A	TOTAL:	132
		TOTAL:	472	OVERALL DIMEN	ISIONS
				WIDTH: DEPTH:	43'-6" 56'-0"

### FOUNDATION VENTILATION CALCULATIONS

(REFERENCE: N.C.S.R.B.C. 2018 EDITION SECTION R408)

NOT APPLICABLE WITH SLAB FOUNDATIONS

### ATTIC VENTILATION REQUIREMENTS

NATURAL ROOF VENTILATION CALCULATIONS | MECHANICAL ROOF VENTILATION CALCULATIONS

1535 SQ. FT. = 10.23 SQ. FT. VENT REQ'D

BUILDER TO PROVIDE APPROPRIATE VENTILATING AS REQUIRED PER CODE 1535 SQ. FT. = 5.12 SQ. FT. VENT REQ'D

BUILDER TO PROVIDE APPROPRIATE VENTILATING AS REQUIRED PER CODE






This document is property of Garman Homes Inc, and was prepared for their use only The plans, elevations illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes Inc. All right reserved and protected under federal law.


Project Number Project Number Plan Number FP-1850

### SER ELEVATION

OT 0102 SERENITY

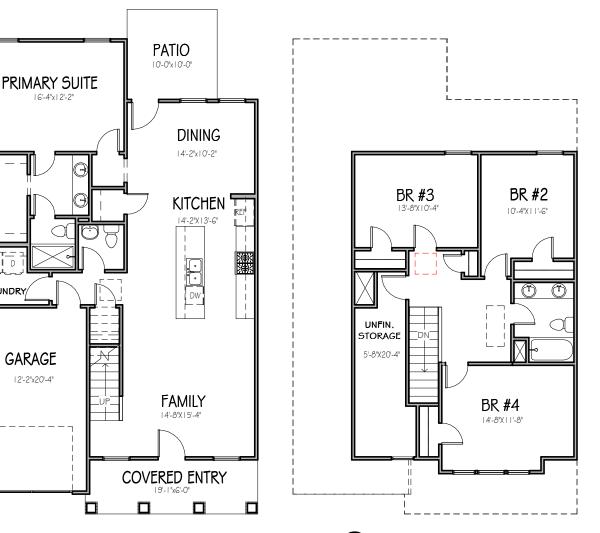


Drawn By MMH Checked By JM Date Drawn 4/8/20 **Revision Date** 7/1/20 4/5/22 11/8/22 2/15/23

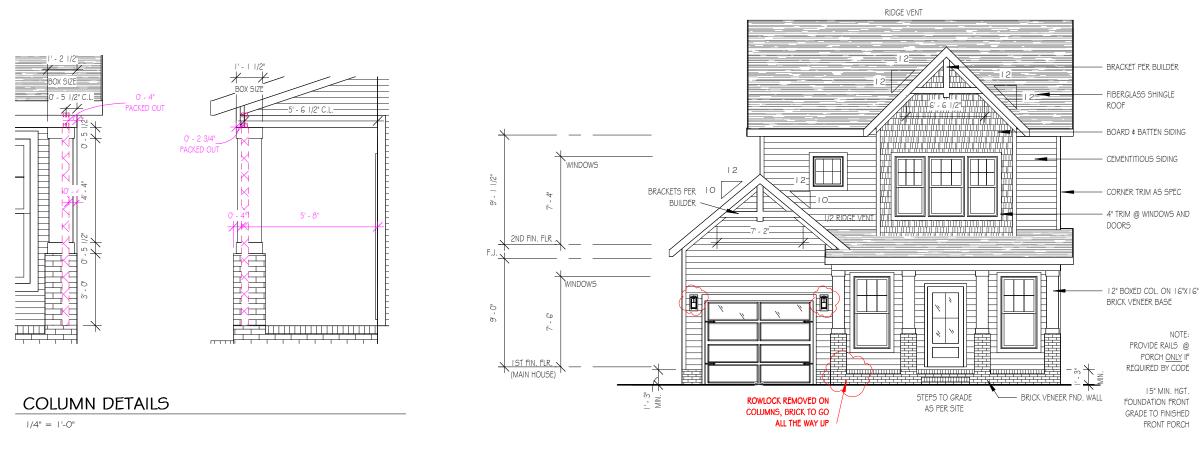

FRONT ELEVATION

1/8" = 1'-O" NOTE - SLOPE ALL GRADES AWAY FROM HOUSE FOR POSITIVE DRAINAGE

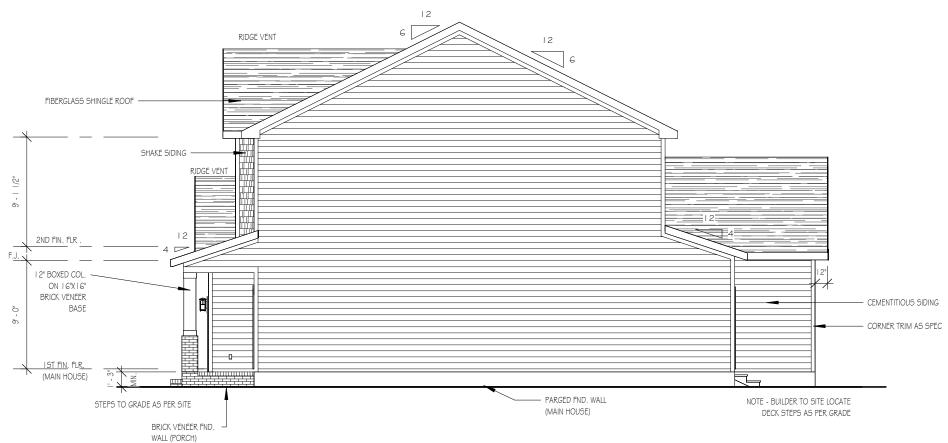

RIGHT SIDE ELEVATION

1/8" = 1'-0"

THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.



This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.

Project Number
Project Number
Plan Number
FP-1850

## AZALEA SER ELEVATION B LOT 0102 SERENITY

Drawn By
MH
Checked By
CM
Date Drawn
4/8/20
Revision Date
7/1/20
4/5/22
2/15/23

1

NOTE - SLOPE ALL GRADES AWAY FROM HOUSE FOR POSITIVE DRAINAGE

1/8" = 1'-0"

LEFT SIDE ELEVATION

1/8" = 1'-0"

THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL
CONDITIONS AND DIMENSIONS PRIOR TO
CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.

> NOTE: PROVIDE RAILS @

> > 15" MIN. HGT.

FRONT PORCH



This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.


Project Number Project Number Plan Number FP-1850

### SER ELEVATION B LOT 0102 SERENITY AZALEA

Drawn By МН Checked By CM Date Drawn 4/8/20 Revision Date 7/1/20 4/5/22 2/15/23 Sheet

12 RIDGE VENT - FIBERGLASS SHINGLE ROOF RIDGE VENT - SHAKE SIDING 72 RIDGE VENT 2ND\_FIN.\_FLR\_. **\** 4 CEMENTITIOUS SIDING 4" CORNER TRIM ō 12" BOXED COL. ON 16"X16" BRICK VENEER BASE PORCH ONLY IF
REQUIRED BY CODE IST FIN. FLR. (MAIN HOUSE) - PARGED FND. WALL NOTE - BUILDER TO SITE LOCATE STEPS TO GRADE AS PER SITE FOUNDATION FRONT DECK STEPS AS PER GRADE GRADE TO FINISHED

WINDOWS WITH CORNER LOTS ONLY

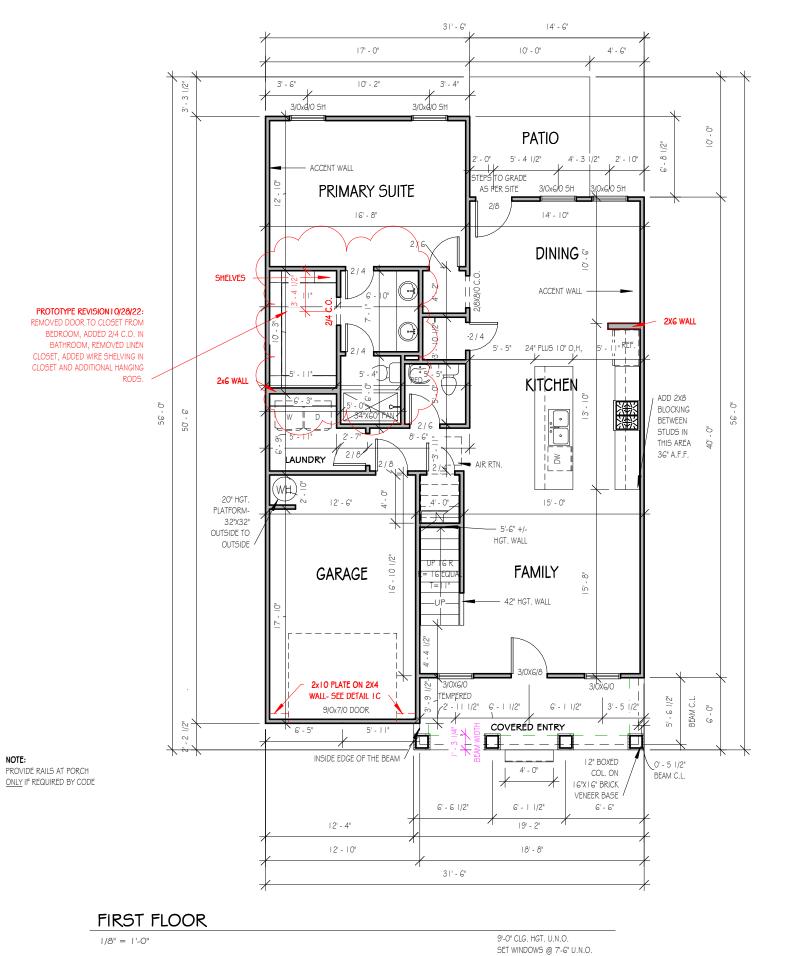

THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.



This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.

Project Number
Project Number
Plan Number
FP-1850

# AZALEA SER ELEVATION B LOT 0102 SERENITY

Drawn By

MH
Checked By

CM
Date Drawn

4/8/20

Revision Date

7/1/20

4/5/22

2/15/23

Sheet

### NOTES:


ROUGH FRAME ALL CASED OPENINGS 2" BIGGER THAN FINISHED OPENING CALLS FOR

ROUGH FRAME ALL WINDOW OPENINGS 1/2" LARGER THAN FINISHED WINDOW CALLS FOR, WHEN PAIRED WITH ANOTHER WINDOW THAT CALLS FOR DSP, ADD EXTRA TO OUTSIDE MEASUREMENT OF WINDOW

ALL EXTERIOR WALLS 2X4

TOP OF ALL WINDOWS SILLS SHALL BE 24" MINIMUM ABOVE THE FINISHED FLOOR <u>OR</u> A FALL PREVENTION DEVICE SHALL BE INSTALLED IN ACCORDANCE WITH SECTION R312.2 OF N.C.S.R.B.C., 2018 EDITION

GBG (GRILL BEWTEEEN GLASS) TO BE ADDED TO CORNER LOT WINDOWS

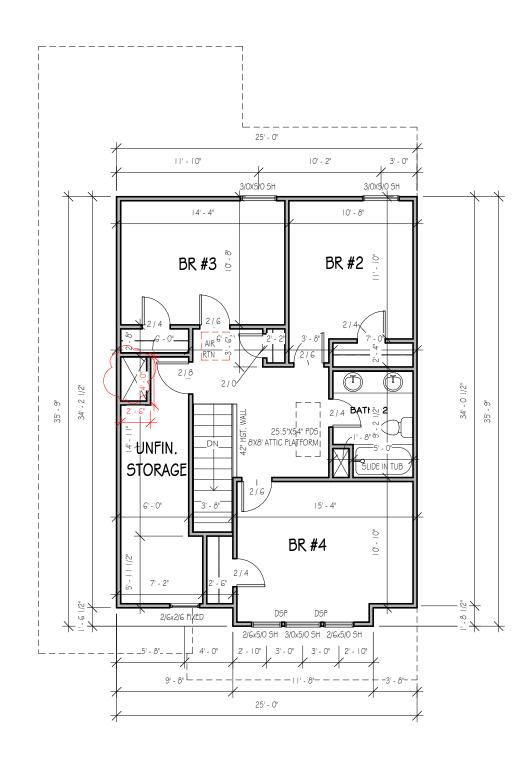

### NOTES:

ROUGH FRAME ALL CASED OPENINGS 2" BIGGER THAN FINISHED OPENING CALLS FOR

ROUGH FRAME ALL WINDOW OPENINGS 1/2\* LARGER THAN FINISHED WINDOW CALLS FOR, WHEN PAIRED WITH ANOTHER WINDOW THAT CALLS FOR DSP, ADD EXTRA TO OUTSIDE MEASUREMENT OF WINDOW

ALL EXTERIOR WALLS 2X4

TOP OF ALL WINDOWS SILLS SHALL BE 24" MINIMUM ABOVE THE FINISHED FLOOR <u>OR</u> A FALL PREVENTION DEVICE SHALL BE INSTALLED IN ACCORDANCE WITH SECTION R312.2 OF N.C.S.R.B.C., 2018 EDITION

SECOND FLOOR

1/8" = 1'-0"

<u>9'-0" CLG.</u> HGT. U.N.O. SET WINDOWS @ 7'-4" U.N.O. THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.




This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.


Project Number
Project Number
Plan Number
FP-1850

## AZALEA SER ELEVATION B LOT 0102 SERENITY

Drawn By
MH
Checked By
CM
Date Drawn
4/8/20
Revision Date
7/1/20
4/5/22
2/15/23

Sheet

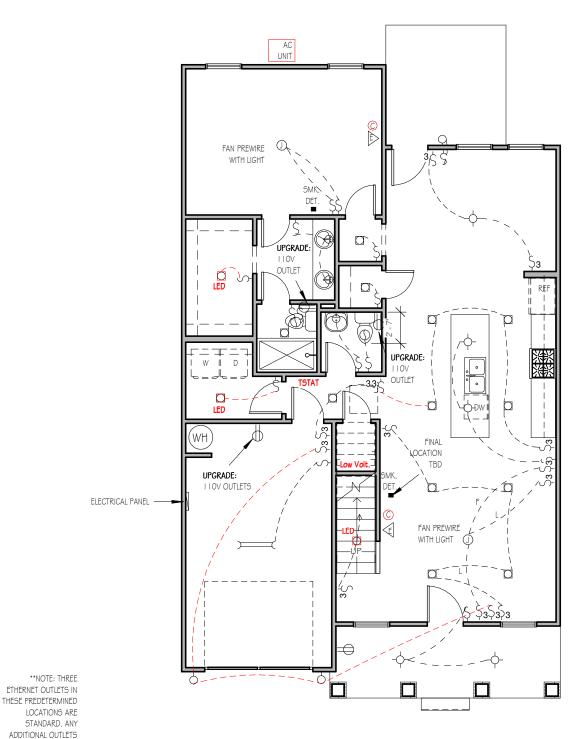

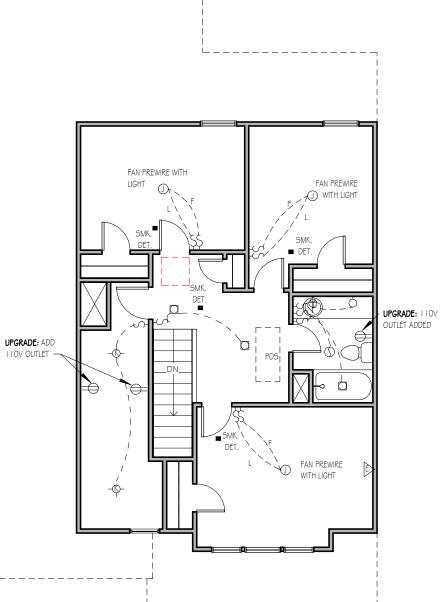

THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.

ELECTRICAL LECEND

-∳- - LIGHT FIXTURE

MP- WATERPROOF GUILET

- RECESSED LIGHTING

. - SINGLE PALL SMITCH

POTUPE SHIPTON - MOKE PETECTOR

DUPLEX RECEPTABLE (162/)

- .220 VOLT WEGETTACLE

CONTRACTOR - CLA PANCISHTS

SWITCHED RECEPTAGLE (TOP WIRE ONLY)

GROUND FAILT CIRCUIT INTERRUPTOR

- TRACK LIGHTS

- - Huki<del>ntrochlir Liestrike</del>

8 - D-WAY SMITCH & - 4-MAY SMITCH

<sup>Б</sup>Д - Ньоор Цантэ

W - EYEDALL SPOTS

O - CABLE OVILET ▲ - TELEPHONE OUTLET A - COMPUTER DATA OUTLET

M - DURSLAR ALARM

NOTE: ALL ELECTRICAL TO SE VERIFIED BY OWNER/BULDER SCHOOL ROUGH-IN.

O - PAKLISHT



This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.

Project Number Project Number Plan Number FP-1850

> SER ELEVATION B LOT 0102 SERENITY AZALEA

Drawn By MH Checked By CM Date Drawn 4/8/20 Revision Date

7/1/20 4/5/22 2/15/23

Sheet

SECOND FLOOR ELECTRICAL PLAN

1/8" = 1'-0"


NOTE - ELECTRICAL RECEPTACLE AND SWITCH QUANTITIES AND LOCATIONS SHOWN ON PLAN ARE FOR ILLUSTRATION PURPOSES ONLY. ACTUAL NUMBER AN D LOCATIONS SHALL BE FIELD DETERMINED AS PER CLIENT AND BUILDER EXCEPT WHERE CODE REQUIREMENTS APPLY.


### ARE AN UPGRADE.

1/8" = 1'-0"

FIRST FLOOR ELECTRICAL PLAN

NOTE - ELECTRICAL RECEPTACLE AND SWITCH QUANTITIES AND LOCATIONS SHOWN ON PLAN ARE FOR ILLUSTRATION PURPOSES ONLY. ACTUAL NUMBER AN D LOCATIONS SHALL BE FIELD DETERMINED AS PER CLIENT AND BUILDER EXCEPT WHERE CODE REQUIREMENTS APPLY.

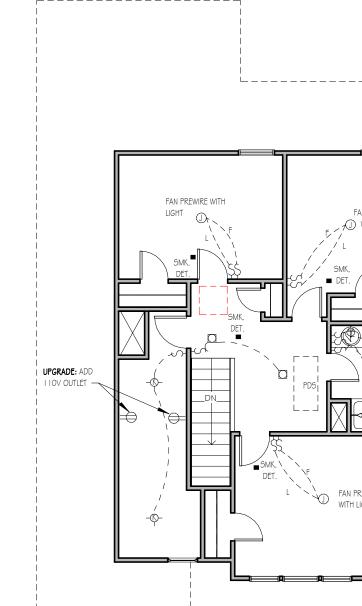

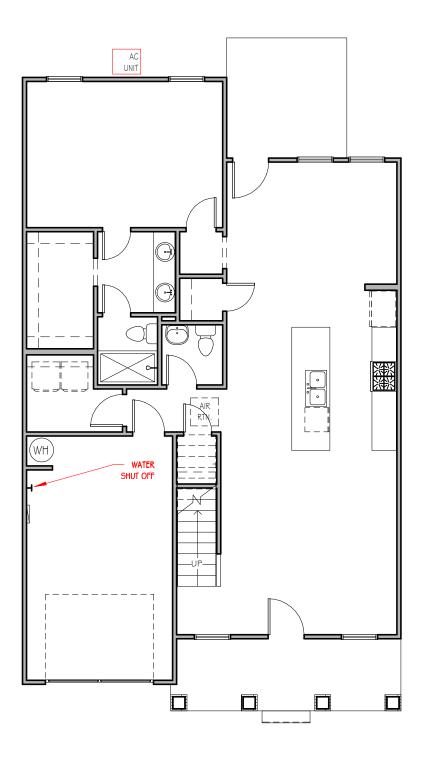

FIRST FLOOR MECHANICAL PAGE

1/8" = 1'-0"

THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.



This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.

Project Number	
Project Number	
Plan Number	
FP-1850	

# AZALEA SER ELEVATION B LOT 0102 SERENITY

Drawn By
MH
Checked By
CM
Date Drawn
4/8/20
Revision Date
7/1/20
4/5/22
2/15/23


Shee

CHASE ADDED 11/2/22 8'x8' HVAC ATTIC PLATFORM

SECOND FLOOR MECHANICAL PAGE

1/8" = 1'-0"

M

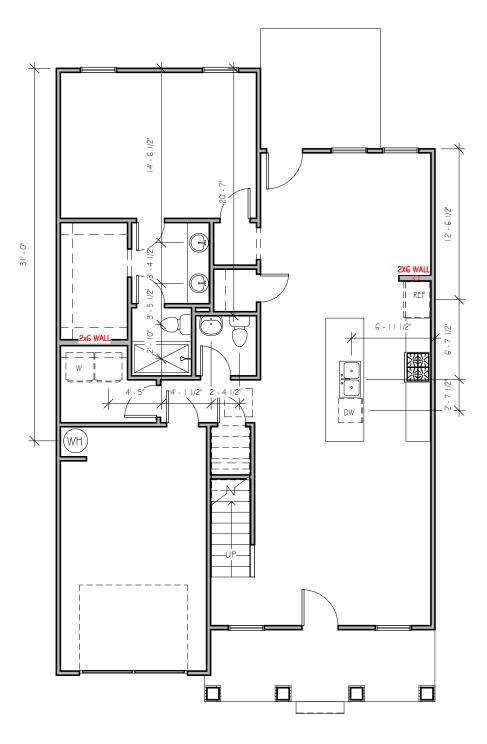

### FIRST FLOOR PLUMBING

1/8" = 1'-0"

THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACLY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.



This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.


Project Number
Project Number
Plan Number
FP-1850

# AZALEA SER ELEVATION B LOT 0102 SERENITY

Drawn By
MH
Checked By
CM
Date Drawn
4/8/20
Revision Date
7/1/20
4/5/22
2/15/23

Sheet


P

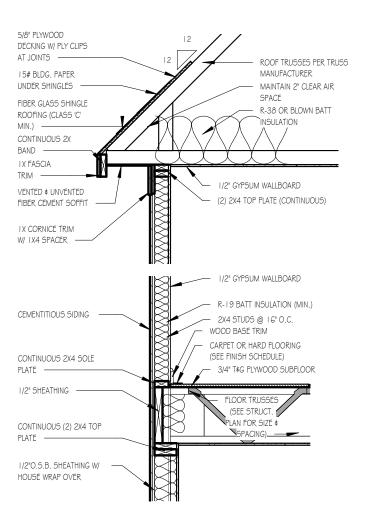

### TWO-STORY WALL SECTION

1/2" = 1'-0"

1/2" = 1'-0"

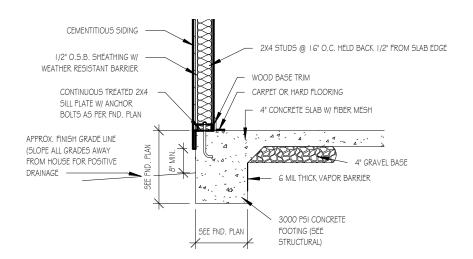


### FOUNDATION DETAIL - SLAB

1/2" = 1'-0"


1/2" FIRE-RATED PLYWOOD -DECKING W/ PLY CLIPS AT JOINTS EXTENDING AMIN. OF 4' AWAY FROM WALL ASSEMBLY ROOF TRUSSES PER TRUSS MANUFACTURER 15# BLDG. PAPER UNDER SHINGLES MAINTAIN 2" CLEAR AIR FIBER GLASS SHINGLE SPACE R-38 OR BLOWN BATT ROOFING (CLASS 'C' MIN.) INSULATION CONTINUOUS 2X BAND LX FASCIA TRIM 1/2" GYPSUM WALLBOARD 5'8" PLYWOOD SOFFIT, ALL SOFFITS CONNECTING TO THE (2) 2X4 TOP PLATE (CONTINUOUS) SPECIAL WALL AND A MIN. OF 4' OF CONNECTING POINT SHALL BE SEALED W/ TWO LAYERS OF FIRE-RATED PLYWOOD OR 5/8" EXTERIOR OR MOISTURE RESISTANT GYPSUM BOARD IX CORNICE TRIM W/ IX4 SPACER FIRE RATED OSB

### ROOF DETAIL SPECIAL FIRE-RATED WALLS

1/2" = 1'-0"

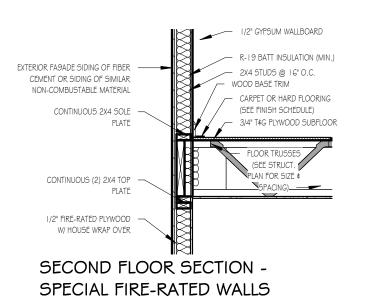

1/2" = 1'-0"



### LUG FOOTING


THE PURPOSE OF THESE DRAWINGS IS TO SHOW THE INTENT OF THE DESIGN AND CONSTRUCTION OF THIS HOME. CONTRACTOR SHOULD VERIFY ALL CONDITIONS AND DIMENSIONS PRIOR TO CONSTRUCTION. ONCE A PERMIT HAS BEEN ISSUED, CONTRACTOR SHALL ASSUME ALL RESPONSIBILITY TO THE ACCURACY OF THE PLANS AND ANY CHANGES MADE DURING CONSTRUCTION.



This document is property of Garman Homes Inc, and was prepared for their use only. The plans, elevations, illustrations, and other material contained within this set may not be reproduced, either in part or wholly, in any manner without the express written permission of Garman Homes, Inc. All right reserved and protected under federal law.

Project Number
Project Number
Plan Number

# I YPICAL DE LAIL SHEET SERENITY COLLECTION




FRONT PORCH COLUMNS
SUPPORT ATTACHMENT

1/2" = 1'-0"

Drawn By	
MMH	
Checked By	
JM	
_Date Drawn	
10/28/20	
Revision Date	
9/14/22	
9/20/22	
Sheet	

D

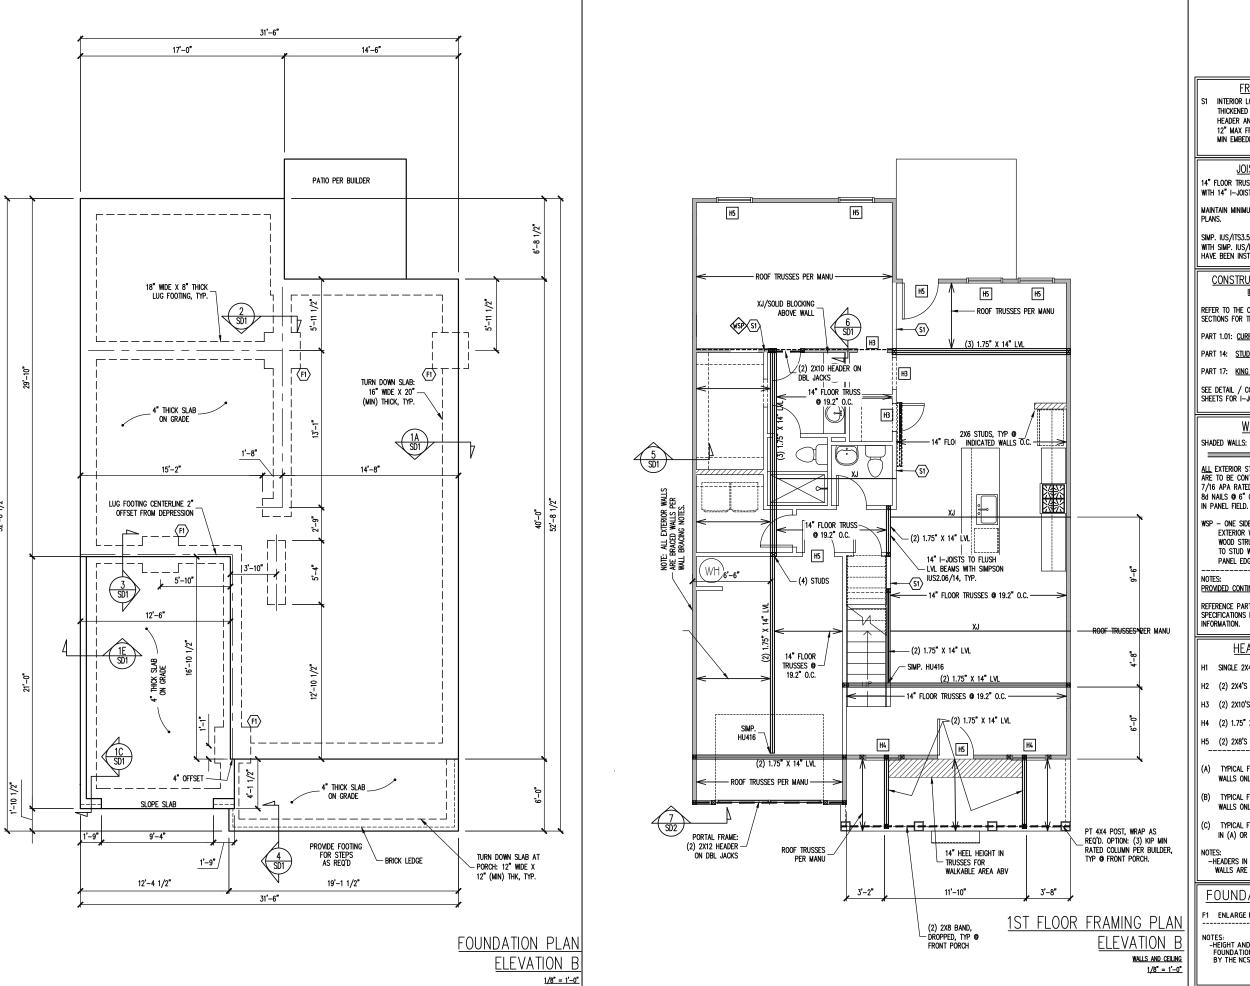



S1 INTERIOR LOAD BEARING WALL: SECURE TO THICKENED SLAB BELOW WITH 1/2" Ø RED HEADER ANCHOR (OR EQUAL) @ 6'-0" O.C., 12" MAX FROM ENDS / CORNERS OF WALL, 7"
MIN EMBEDMENT INTO SLAB BELOW.

### JOIST SUBSTITUTION

14" FLOOR TRUSSES PERMITTED TO BE SUBSTITUTED WITH 14" I-JOISTS.

MAINTAIN MINIMUM SPACING AS CALLED OUT ON PLANS.

SIMP. IUS/ITS3,56/14 HANGERS TO BE SUBSTITUTED WITH SIMP. IUS/ITS2.06/14 HANGER WHEN I-JOISTS have been installed."

### **CONSTRUCTION SPECIFICATIONS**

REFER TO THE CONSTRUCTION SPECIFICATIONS SECTIONS FOR THE FOLLOWING INFORMATION:

PART 1.01: CURRENT GOVERNING CODE

PART 14: STUD SUPPORT FOR BEAMS

PART 17: KING STUDS FOR EXTERIOR WALLS

SEE DETAIL / CONSTRUCTION SPECIFICATIONS SHEETS FOR I-JOISTS ALLOWABLE SUBSTITUTIONS

### WALL BRACING

ALL EXTERIOR STUD WALLS, EXTERIOR SIDE, ARE TO BE CONTINUOUSLY SHEATHED WITH 7/16 APA RATED OSB NAILED TO STUDS WITH 8d NAILS @ 6" O.C. AT PANEL EDGES, 12" O.C. IN PANEL FIELD.

WSP - ONE SIDE OF INTERIOR WALL OR INSIDE OF EXTERIOR WALL WITH 3/8" MIN. THICKNESS TO STUD WALL WITH 8d NAILS @ 4" O.C. AT PANEL EDGES, 8" O.C. IN PANEL FIELD.

PROVIDED CONTINUOUS SHEATHING = 164' MIN.

REFERENCE PART 16.02 OF CONSTRUCTION SPECIFICATIONS FOR GENERAL WIND BRACING INFORMATION.

### **HEADER SCHEDULE**

- SINGLE 2X4 TURNED FLAT (A)
- H2 (2) 2X4'S ON SINGLE JACKS (B)
- H3 (2) 2X10'S ON SINGLE JACKS (C)
- (2) 1.75" X 9.25" LVL'S ON DBL JACKS
- H5 (2) 2X8'S ON SINGLE JACKS
- TYPICAL FOR INTERIOR NON LOAD BEARING WALLS ONLY, ROUGH OPENING 38" MAX.
- (B) TYPICAL FOR INTERIOR NON LOAD BEARING
  WALLS ONLY, ROUGH OPNG 38" TO 74" MAX.
- TYPICAL FOR ALL CONDITIONS NOT LISTED IN (A) OR (B) UNO.

-HEADERS IN NON LOAD BEARING INTERIOR
WALLS ARE NOT LABELED.

### FOUNDATION SCHEDULE

ENLARGE FOOTING TO 36" SQ. X 12" THK

-HEIGHT AND BACKFILL LIMITATIONS FOR FOUNDATION WALLS ARE TO BE GOVERNED BY THE NCSBC, LATEST EDITION.

× eigh,

only. ission

listed perm

P.A. Ti after

eering place

Engine takes

the pro

FOR 1 YEAR (this plan is the construction

L VALID F sign of th plans if


REV 3 11/28/2022	PLAN: AZALEA
KEV 2 NBC/CMC	
REV 1 NBC/CMC	18D 201
WDQN	SCOPE STRUCTURAL ADDENDUM
	FRESH PAINT

DATE: 4/29/2022 PROJECT NO.

> 22-30-058 SHEET NO.

ENG: NBG/CMC

S<sub>1</sub>B 1 of 6

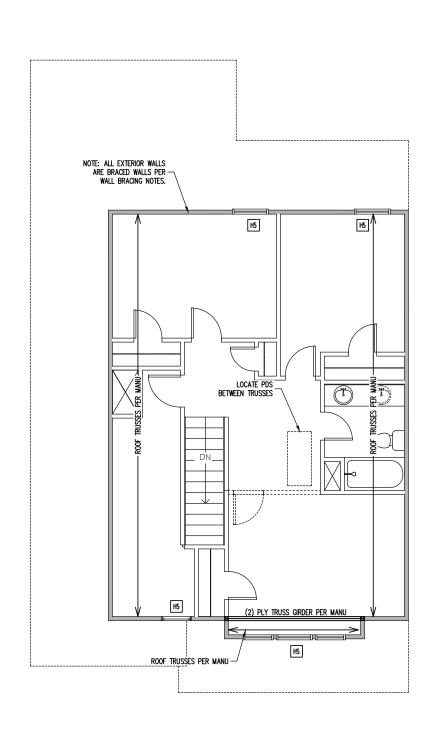

TRUSS <u>UPLIFT CONNECTORS</u>

EXPOSURE B. 120 MPH, ANY PITCH, 24" O.C. MAX ROOF TRUSS SPACING

TRUSSES SHALL BE ATTACHED TO SUPPORT WALL FOR UPLIFT
RESISTANCE. CONTINUOUS OSB WALL SHEATHING BELOW PROVIDES
CONTINUOUS UPLIFT RESISTANCE TO FOUNDATION. ALL TRUSSES
SUPPORTED BY INTERMEDIATE SUPPORT WALLS, KNEEWALLS OR
BEAMS SHALL BE ATTACHED TO SUPPORTING MEMBER PER SCHEDULE
BELOW.

ROOF SPAN IS MEASURED HORIZONTALLY BETWEEN FURTHEST SUPPORT POINTS.

OVER 28'

(1) SIMPSON H2.5A HURRICANE CLIP TO DBL TOP PLATE OR BEAM

OR (1) SIMPSON H3 CLIP TO SINGLE 2X4 PLATE

DN 10:12 DN 10:12 VALLEY SET TRUSSES VALLEY SET TRUSSES -- VALLEY SET TRUSSES DN 10:12 DN 12:12 DN 12:12 DN 10:12 VALLEY SET TRUSSES

> ROOF FRAMING PLAN **ELEVATION B** 1/8" = 1'-0"

### FRAMING NOTES

-ROOF TRUSSES PER MANU. TYPICAL U.N.O. -VERIFY ALL KNEEWALL HEIGHTS, ROOF PITCHES, AND ARCHITECTURAL OVERHANGS PRIOR TO CONSTRUCTION

### CONSTRUCTION SPECIFICATIONS INSTANT REFERENCES

REFER TO THE CONSTRUCTION SPECIFICATIONS SECTIONS FOR THE FOLLOWING INFORMATION:

PART 1.01: CURRENT GOVERNING CODE

PART 14: STUD SUPPORT FOR BEAMS PART 17: KING STUDS FOR EXTERIOR WALLS

WALL BRACING

ALL EXTERIOR STUD WALLS, EXTERIOR SIDE, ARE TO BE CONTINUOUSLY SHEATHED WITH 7/16 APA RATED OSB NAILED TO STUDS WITH 8d NAILS @ 6" O.C. AT PANEL EDGES, 12" O.C. IN PANEL FIELD.

PROVIDED CONTINUOUS SHEATHING = 121' MIN.

REFERENCE PART 16.02 OF CONSTRUCTION SPECIFICATIONS FOR GENERAL WIND BRACING INFORMATION.

### HEADER SCHEDULE

- H1 SINGLE 2X4 TURNED FLAT (A)
- (2) 2X4'S ON SINGLE JACKS (B)
- (2) 2X10'S ON SINGLE JACKS (C)
- H4 (2) 1.75" X 9.25" LVL'S ON DBL JACKS
- H5 (2) 2X8'S ON SINGLE JACKS
- TYPICAL FOR INTERIOR NON LOAD BEARING WALLS ONLY, ROUGH OPENING 38" MAX.
- TYPICAL FOR INTERIOR NON LOAD BEARING WALLS ONLY, ROUGH OPNG 38" TO 74" MAX.
- TYPICAL FOR ALL CONDITIONS NOT LISTED IN (A) OR (B) UNO.

-HEADERS IN NON LOAD BEARING INTERIOR WALLS ARE NOT LABELED.

Engineering 1 from Engine

only.

listed perm

for the without

plans are seal date

P.A. These r after the s

Engine takes

VALID FOR 1 YEAR ONLY. sign of this plan is the property of plans if construction or permitting

ENGINEERING The structural liability for th

STRUCTURAL ENGINEERS
License No. C-3870
318 W Milbrook Rd, Suite 201
Raleigh, North Carolina 27609
A. Phone (919) 844-1661

STRUCTURAL ADDENDUM
TBD REV 1 NBG/CMC 6/20/2022
REV 2 NBG/CMC 9/2/2022
REV 3 11/28/2022

ENG: NBG/CMC DATE: 4/29/2022

LOC:


PROJECT NO. 22-30-058

> SHEET NO. S<sub>2</sub>B

2 of 6

2ND FLOOR FRAMING PLAN ELEVATION B WALLS AND CEILING

1/8" = 1'-0"

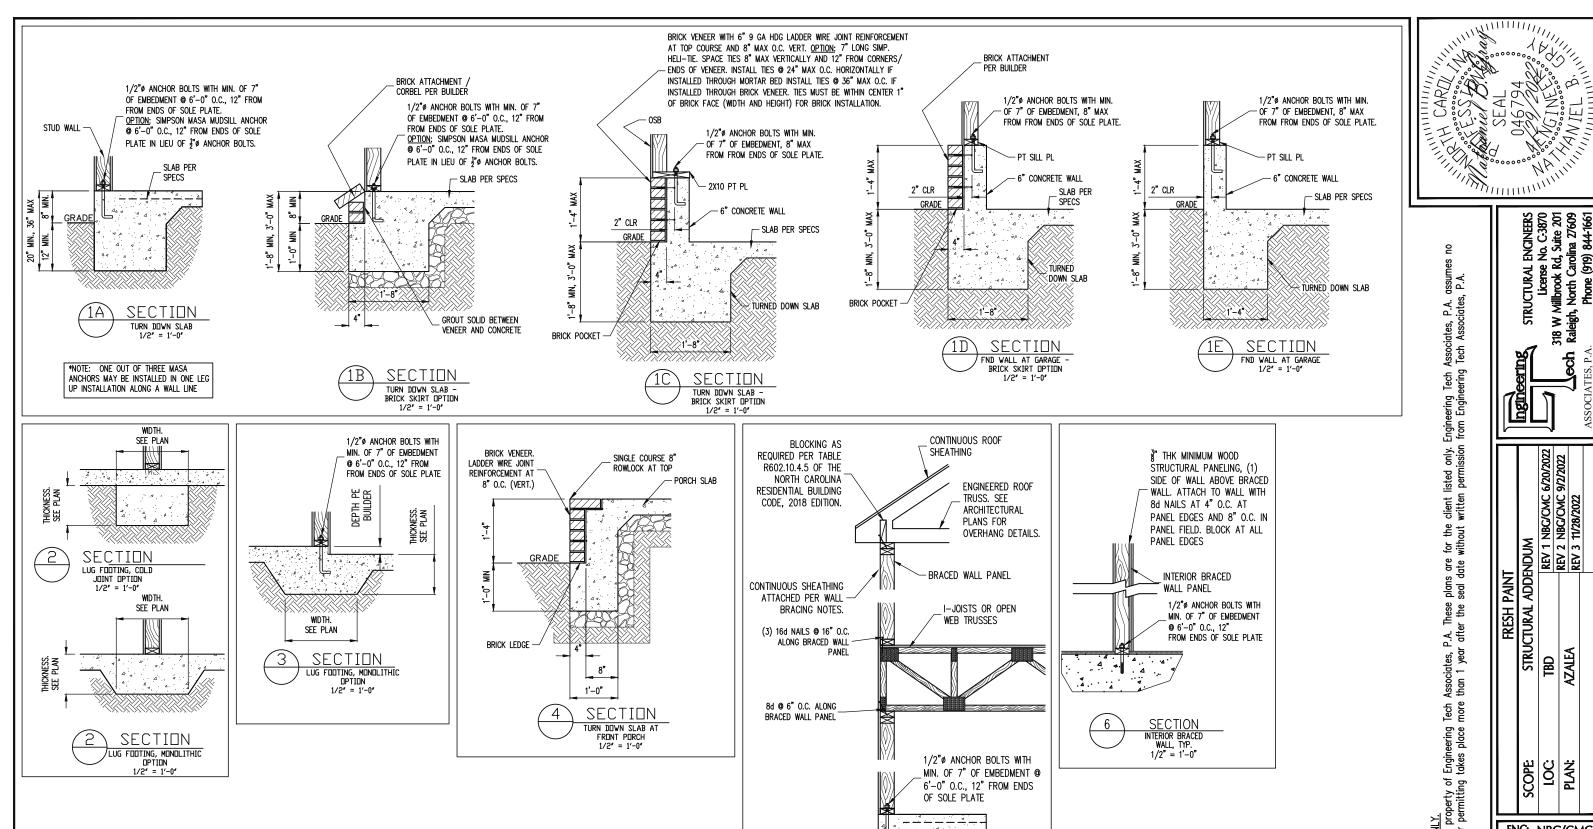


YPICAL BRACED WALL PANEL CONNECTION
1/2" = 1'-0"

STRUCTURAL ENGINEERS
License No. C-3870
B W Millbrook Rd, Suite 201
aleigh, North Carolina 27609
Phone (919) 844-1661 Engineering T from Enginee nglin only. listed permi client I for the without siates, P.A. These plans are 1 year after the seal date **FRESH PAINT** ICTURAL, **B** eering place Engine takes FA: <u>D FOR 1 YEAR ONLY.</u> f this plan is the property of E if construction or permitting to ENG: NBG/CMC DATE: 4/29/2022

NA NI

PROJECT NO. 22-30-058

> SHEET NO. SD1 5 of 6

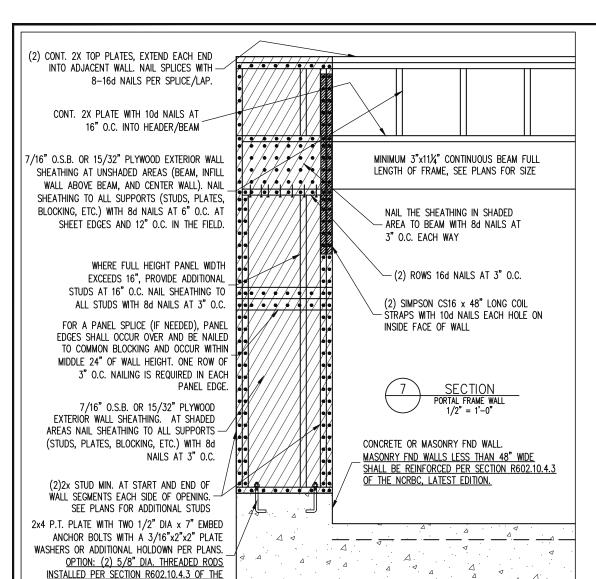

### ALLOWABLE I-JOIST SUBSTITUTION

NOTE: MAINTAIN JOIST DEPTH, DIRECTION, AND SPACING SPECIFIED ON

NCRBC, LATEST EDITION.

MANUFACTURER	DEPTH	SERIES	SIMPSON FACE MOUNT HGR	SIMPSON TOP FLANGE HGR
BLUELINX	11.875"	BLI 40	IUS2.56/11.88	ITS2.56/11.88
BOISE CASCADE	11.875"	BCI 5000s	IUS2.06/11.88	ITS2.06/11.88
BOISE CASCADE	11.875"	BCI 6000s	IUS2.37/11.88	ITS2.37/11.88
INTERNATIONAL	11.875"	IB 400	IUS2.56/11.88	ITS2.56/11.88
BEAMS				
LP CORP	11.875"	LPI 20+	IUS2.56/11.88	ITS2.56/11.88
NORDIC	11.875"	NI 40X	IUS2.56/11.88	ITS2.56/11.88
ROSEBURG	11.875"	RFPI 40s	IUS2.56/11.88	ITS2.56/11.88
WEYERHAEUSER	11.875"	TJI 210	IUS2.06/11.88	ITS2.06/11.88
WEYERHAEUSER	11.875"	EEI-20	IUS2.37/11.88	ITS2.37/11.88
BLUELINX	14"	BLI 40	IUS2.56/14	ITS2.56/14
BOISE CASCADE	14"	BCI 5000s	IUS2.06/14	ITS2.06/14
BOISE CASCADE	14"	BCI 6000S	IUS2.37/14	ITS2.37/14
LP CORP	14"	LPI 20+	IUS2.56/14	ITS2.56/14
NORDIC	14"	NI 40X	IUS2.56/14	ITS2.56/14
ROSEBURG	14"	RFPI 40s	IUS2.56/14	ITS2.56/14
WEYERHAEUSER	14"	TJI 210	IUS2.06/14	ITS2.06/14
WEYERHAEUSER	14"	EEI-20	IUS2.37/14	ITS2.73/14

JOISTS NOT LISTED IN THE ABOVE TABLE MAY BE USED PROVIDED THEY MEET OR EXCEED THE PROPERTIES OF THOSE LISTED. SUBSTITUTE USP BRAND HANGERS WITH EQUIVALENT VALUES AS DESIRED.

### **ABBREVIATIONS**

ABV B.E. BTWN CIP CONC CS DIA DBL DSP EQ FLG FL FLR	ABOVE BOTH BOTH ENDS BETWEEN CAST IN PLACE CONCRETE CONTINUOUS SHEATHING DIAMETER DOUBLE JOIST DBL STUD POCKET EQUAL EACH FLANGE FLITCH PLATE FLOOR	FND FTG HDG HGR LVL NTS O.C. PSL PT QJ SP SQ	FOUNDATION FOOTING HOT DIPPED GALVANIZED HANGER LAMINATED VENEER LUMBER NOT TO SCALE ON CENTER PARALLEL STRAND LUMBER PRESSURE TREATED QUAD JOIST STUD POCKET SQUARE	TJ TYP TRPL TSP UNO XJ	TRIPLE JOIST TYPICAL TRIPLE TRIPLE STUD POCKET UNLESS NOTED OTHERWISE EXTRA JOIST	
<u>NOTES</u>						
THE BUILDER IS RESPONSIBLE FOR REVIEWING PLANS PRIOR TO CONSTRUCTION. THE BUILDER						

ON. THE BUILDER SHALL IMMEDIATELY CONTACT THE ENGINEER OF RECORD (EOR) BEFORE PROCEEDING IF THE FOLLOWING CONDITIONS ARE NOTED BEFORE OR DURING CONSTRUCTION:

- 1) THE WORKING PLANS DO NOT BEAR THE SEAL OF THE FOR
- 2) THE PLANS CONTAIN DISCREPANT OR INCOMPLETE INFORMATION

ANY ERRORS DUE TO A FAILURE TO FOLLOW THE ABOVE PROCEDURES SHALL NOT BE THE RESPONSIBILITY OF THE EOR. FURTHERMORE, IT IS THE RESPONSIBILITY OF THE BUILDER TO ENSURE THAN ANY REVISIONS ISSUED BY THE EOR ARE PROMPLY DISTRIBUTED TO THE

THE EOR DOES NOT PERFORM FENESTRATION OR VENTING CALCULATIONS OR ANY OTHER CALCULATIONS THAT ARE NOT DIRECTLY RELATED TO STRUCTURAL ENGINEERING

ROOF AND FLOOR TRUSSES TO BE DESIGNED BY AN ENGINEER REGISTERED BY THE STATE. FINAL TRUSS DRAWING SHOULD BE SUBMITTED TO THE EOR FOR REVIEW

### CONSTRUCTION SPECIFICATIONS

LIVE LOAD (PSF) DEAD LOAD (PSF)

### PART 1: GENERAL

- 1.01 CONSTRUCTION SHALL MEET THE REQUIREMENTS OF THE NORTH CAROLINA RESIDENTIAL CODE, 2018 EDITION.
- 1.02 DIMENSIONS SHOWN SHALL GOVERN OVER SCALE ON THESE DRAWINGS.
- METHODS, PROCEDURES AND SEQUENCES OF CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR, WHO SHALL TAKE ALL NECESSARY PRECAUTIONS TO MAINTAIN AND INSURE THE INTEGRITY OF THE STRUCTURE AT ALL STAGES OF CONSTRUCTION.

### PART 2: DESIGN LOADS

2.01 DESIGN LOADS SHALL CONFORM WITH THE TABLE BELOW: USE

BALCONIES, DECKS, ATTICS WITH FIXED STAIR ACCESS, DWELLING UNITS INCLUDING ATTICS WITH FIXED STAIR ACCESS, STAIRS, FIRE ESCAPES	40	10
GARAGES (PASSENGER CARS ONLY)	50	
ATTICS (NO STORAGE, LESS THAN 5' HEADROOM)	10	10
ATTICS (WITH STORAGE)	20	10
ROOF	20	10 (15 FOR VAULTS)

- Notes: individual stair treads are to be designed for the uniformly distributed live load of 40 PSF or a 300 lb. concentrated load acting over an area of 4 sq. whichever produces the greater stress.
  - BUILDER TO VERIFY DEAD LOAD DOES NOT EXCEED 10 PSF WHEN HEAVY FLOOR OR ROOF FINISHES SUCH AS TILE OR SLATE ARE UTILIZED. NOTIFY ENGINEERING UNDER
- 2.02 INTERIOR WALLS: 5 PSF LATERAL.
- 2.03 BASIC WIND DESIGN VELOCITY OF 120 MPH.
- 2.04 SOIL BEARING CAPACITY 2000 PSF (PRESUMPTIVE)

### PART 5: CONCRETE AND SLABS ON GRADE

- CAST IN PLACE CONCRETE SHALL BE OF NORMAL WEIGHT, 6% AIR ENTRAINMENT, AND SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI AT 28 DAYS TYP UNO. ALL CONCRETE, INCLUDING CONCRETE FOR FOOTINGS, IS TO BE CAST IN PLACE, TYP
- 5.02 REINFORCED CAST IN PLACE CONCRETE SHALL BE PROPORTIONED, MIXED AND PLACED IN ACCORDANCE WITH THE SPECIFICATIONS OF ACI 318, LATEST EDITION.
- SLABS ON GRADE, IF ANY, SHALL CONTAIN SYNTHETIC POLYPROPYLENE FIBRILLATED MICRO FIBERS, FIBER LENGTH 1 1/2", DOSAGE RATE 1 1/2 LBS/CU YD. SLAB TO BE PLACED ON A 6 MIL VAPOR BARRIER ON 2" MIN GRANULAR FILL ON SOIL WITH 90% MIN STANDARD PROCTOR DENSITY. VAPOR BARRIER MAY BE OMITTED FOR SLABS NOT

### PART 6: REBAR AND WIRE REINFORCEMENT

- REBAR SHALL BE DEFORMED STEEL CONFORMING TO ASTM A615 GRADE 60 TYP UNO
- LAP SPLICES SHALL BE CLASS B AS DEFINED BY ACI 318, TYP UNO
- 6.03 WIRE REINFORCEMENT SHALL BE 9 GA AND SHALL CONFORM TO ASTM A1064.

- 7.01 CONCRETE MASONRY UNITS SHALL CONFORM TO ASTM C90 AND C55, NORMAL WEIGHT,
- 7.02 CLAY MASONRY UNITS SHALL CONFORM TO ASTM C62-17 GRADE SW
- 7.03 MORTAR SHALL BE TYPE S. MORTAR AND GROUT SHALL CONFORM TO ASTM C476, MIN COMPRESSIVE STRENGTH OF 2000 PSI.
- 7.04 MASONRY CONSTRUCTION SHALL CONFORM TO THE SPECIFICATIONS OF ACI 530
- 7.05 LADDER WIRE REINFORCEMENT SHALL CONFORM TO ASTM A951. 6" MIN LAPS FOR CONTINUOUS WALL APPLICATIONS

### PART 8: BOLTS AND LAG SCREWS

8.03 ANCHOR RODS AND BOLTS SHALL CONFORM TO ASTM F1554-15 GRADE 36 UNO. BENT ANCHOR BOLTS SHALL HAVE A 2" MIN HOOK UNO

### PART 9: DRIVEN FASTENERS

9.01 NAILS, SPIKES AND STAPLES SHALL CONFORM TO ASTM F 1667- 05. NAILS ARE TO BE

### PART 10: DIMENSIONAL LUMBER

10.01 SOLID SAWN WOOD FRAMING DESIGN IS BASED ON NO. 2 SPRUCE PINE FIR <u>OR</u> SYP #2 FOR JOISTS, RAFTERS, GIRDERS, BEAMS, STUDS, ETC.

- 11.01 LVLOR PSI MINIMUM ALLOWARLE DESIGN STRESSES ARE AS FOLLOWS: E= 1.9 X 10E6 PSI, Fb = 2600 PSI, Fc = 285 PSI, Fc = 750 PSI LSL MINIMUM ALLOWABLE DESIGN STRESSES ARE AS FOLLOWS: E= 1.3 X 10E6 PSI, Fb = 1700 PSI, Fv = 400 PSI, Fc = 680 PSI
- 11.02 LVL OR PSL MEMBERS MAY BE RIPPED FROM DEEPER MEMBERS TO MATCH THE MEMBER DEPTH SPECIFIED IN THE PLANS

### PART 12: PRESSURE TREATED LUMBER

LUMBER IN CONTACT WITH THE GROUND, CONCRETE OR MASONRY SHALL BE PRESSURE TREATED IN ACCOPDANCE WITH AWPA STANDARD C-15. ALL OTHER EXPOSED LUMBER SHALL BE TREATED IN ACCORDANCE WITH AWPA STANDARD C-2 OR BY ANY METHOD GIVING EQUAL PROTECTION. THE BUILDING CODE OFFICE MAY ALSO APPROVE A NATURAL 2.01 DECAY RESISTANT WOOD PER SECTION 19-6(A)

### PART 14: STUD SUPPORTS FOR BEAMS

- 14.01 STEEL, ENGINEERED LUMBER, AND FLITCH PLATE BEAMS BEARING ON A STUD WALL SHALL BEAR AS FOLLOWS:
- 1-When the Beam is perpendicular to, or skewed relative to the wall, the beam shall bear <u>full width</u> on the supporting wall indicated and shall be supported by a minimum of three ganced studs, or a ganced stud column with a number of studs such that the stud column is at least as wide as the true width of the beam being supported, whichever is greater, typ und. For the skewed TION PARTICULAR CARE SHALL BE TAKEN TO ENSURE STUD COLUMN IS CENTERED ON
- 2-REAMS BEARING ONTO THE END OF A STUD WALL PARALLEL TO THE BEAM. SHALL BEAR A MINIMUM OF 4 1/2" ONTO THE WALL AND BE SUPPORTED BY A TRPL STUD GANGED

### 14.02 DIMENSIONAL LUMBER BEAMS BEARING ON A STUD WALL SHALL BEAR AS FOLLOWS:

- 1-WHEN THE BEAM IS PERPENDICULAR TO, OR SKEWED RELATIVE TO THE WALL, THE BEAM SHALL BEAR <u>FULL WIDTH</u> ON THE SUPPORTING WALL INDICATED (LESS 1 1/2" TO ALLOW FOR A CONTINUOUS RIM JOIST WHERE APPLICABLE) AND SHALL BE SUPPORTED BY A TO BE SUPPORTED BY (3) STUDS), FOR THE SKEWED CONDITION PARTICULAR CARE SHALL BE TAKEN TO ENSURE STUD COLUMN IS CENTERED ON THE BEAM
  2-BEAMS BEARING ONTO THE END OF A STUD WALL PARALLEL TO THE BEAM SHALL BEAR
- MINIMUM OF 3" ONTO THE WALL AND BE SUPPORTED BY A DBL STUD GANGED COLUMN
- 14.03 Extra joists bearing on a stud wall perpendicular to or skewed relative to the beam shall be supported by one additional stud.
- STUDS THAT ARE GANGED TO FORM A COLUMN SHALL HAVE ADJACENT STUDS WITHIN THE COLUMN NAILED TOGETHER WITH ONE ROW OF 10d NAILS AT 8" O.C. (TWO ROWS OF 10d NAILS @ 8" O.C., 3" APART, FOR 2X8 OR 2X10 STUDS) ALL COLUMNS SHALL BE CONTINUOUS DOWN TO THE FOUNDATION OR OTHER PROPERLY DESIGNED
  STRUCTURAL ELEMENT SUCH AS A BEAM. COLUMNS TRANSFERRING LOADS THROUGH
  FLOOR LEVELS SHALL BE SOLIDLY BLOCKED FOR THE FULL WIDTH OF THE STUD COLUMN
  STRUCTURAL STRUCTURAL BLOCKED FOR THE FULL WIDTH OF THE STUD COLUMN WITHIN THE CAVITY FORMED BY THE

### PART 15: NAILING OF MULTI PLY WOOD BEAMS

- SOLID SAWN LUMBER JOISTS THAT ARE GANGED TO FORM A BEAM SHALL HAVE ADJACENT MEMBERS IN THE BEAM NAILED TOGETHER WITH THREE ROWS OF 10d NAILS @ 16" O.C. FOR 2X10 OR LARGER, TWO ROWS OF 10d NAILS @ 16" O.C. FOR 2X8, ONE ROW OF 10d NAILS @ 16" O.C. FOR 2X6 OR SMALLER. STAGGER ROWS 5" MIN.
- LVL MEMBERS THAT ARE GANGED TO FORM A BEAM SHALL HAVE ADJACENT MEMBERS IN THE BEAM FASTENED TOGETHER PER MANUFACTURERS RECOMMENDATIONS, TYP

### PART 16: WALL FRAMING AND BRACING

STUD WALLS SHALL CONSIST OF 2X4 STUDS SPACED AT 16" O.C. UNO. STUDS SHALL BE CONTINUOUS FROM SOLE PLATE AT FLOOR TO DOUBLE TOP PLATE AT THE CEILING OR ROOF. NO INTERMEDIATE BANDS OR PLATES SHALL CAUSE DISCONTINUITIES IN A 16.01 STUD WALL EXCEPT AS REQUIRED FOR DOOR OR WINDOW OPENINGS. THE KING STUDS
FOR SUCH OPENINGS SHALL BE CONTINUOUS, TYP UNO.

MAX ALLOWABLE WALL HEIGHTS FOR EXTERIOR STUD WALLS, WITH SOLE PLATE

MAX ALLOWABLE WALL HEIGHTS FOR EXTENDED STOD WALLS, WITH SOLE PLATE
AND DBL TOP PLATE AND 7/16" OSB EXTERIOR BRACING AND ROW OF 2X4 /
2X6 PURLINS AT 8" HEIGHT (AND AT 16" HEIGHT FOR TALL WALLS), TYP UNO:
2X4 ● 16" O.C.: 11"-0" 2X6 ● 16" O.C.: 17"-0"

DBL 2X4 ● 16" O.C.: 13"-4" DBL 2X6 ● 16" O.C.: 21"-0"

16.02 FOR WALL BRACING THE FOLLOWING SHALL APPLY -BLOCKING AT UNSUPPORTED PANEL EDGES IS REQUIRED TYP UNO.
-WALL BRACING IS BY ENGINEERED DESIGN AND NOT PRESCRIPTIVE PER SECTION
602.10 OF THE 2018 NCRC. CONTINUOUS SHEATHING HAS BEEN PROVIDED, ALONG WITH ALTERNATIVE METHODS TO INSURE THE MINIMUM INTENT OF SECTION 602.10 OF THE 2018 NCRC HAS BEEN MET AND EXCEEDED.

-Braced Wall Panels shall be fastened in accordance with Table 602.3(1) to PROVIDE CONTINUOUS PANEL UPLIET RESISTANCE AND COMPULANCE WITH NCRBC R602.3.5 AND R802.11 UNLESS NOTED OTHERWISE ON STRUCTURAL PLANS.

-MAY SUBSTITUTE WSP FOR G8

-single joist. Continuous Rim Joist. Or Blocking of Equal Depth is required ABOVE AND BELOW ALL BRACED WALLS. NAIL BLOCKING ABOVE WALL TO TOP PLATE WITH 16d TOE NAILS @ 6" O.C. NAIL SOLE PLATE OF BRACED WALL TO BLOCKING BELOW WITH (3) 16d NAILS @ 16" O.C. BLOCKING AT HORIZONTAL JOINTS IN BRACED WALL LINES ONLY REQUIRED AT SHADED WALLS, UNO.

### PART 17: KING STUDS

17.01 KING STUDS FOR OPENINGS IN EXTERIOR WALLS SHALL BE AS FOLLOWS:

		NUMBER OF KING STUDS				
MAX OPENIN	g width	5'-0"	9'-0"	13'-0"	17'-0"	21'-0"
	2X4	1	2	3	4	5
STUD SIZE	2X6	1	1	2	2	2
	2X8	1	1	1	1	2

### PART 18: SUBSTITUTIONS

MATERIAL OR MEMBER SIZE SUBSTITUTIONS OR PLAN DEVAITONS REQUIRE THE WRITTEN AUTHORIZATION OF THE DESIGNERS. UNAUTHORIZED DEVAITIONS ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.

### PART 19: OWNERSHIP OF STRUCTURAL DESIGN

THE STRUCTURAL DESIGN OF THIS PLAN IS THE PROPERTY 19.01 OF ENGINEERING TECH ASSOCIATES (ETA). THESE PLANS ARE FOR THE ONE TIME USE AT THE LOCATION INDICATED AND FOR THE CLIENT LISTED. ETA ASSUMES NO LIABILITY FOR THESE PLANS IF THEY ARE REPRODUCED, IN WHOLE OR

SEAL OA6794

OA6794

OMEL BILLININI STRUCTURAL ENGINERS
License No. C:3870
W Millbrook Rd, Suite 201
leigh, North Carolina 27609
Phone (919) 844-1661

2

eering Engine only. ission listed perm for the without plans are seal date These P.A. Trafter eering place Engin takes property of permitting t the pro R 1 YEAR plan is tl nstruction VALID Faign of t

ق يَ

FRESH CTURAL

ENG: NBG/CMC DATE: 4/29/2022

PROJECT NO. 22-30-058

> SHEET NO. SD2

7 2 8

6 of 6