

Client: Watermark Homes

Project: Address: Date: 8/3/2022 Input by: Curtis Quick


Job Name: The Pinyon Pine Beams

Page 1 of 7

Project #:

Kerto-S LVL 1.750" X 11.875" 2-Ply - PASSED GDH (PT 1)

Level: Level

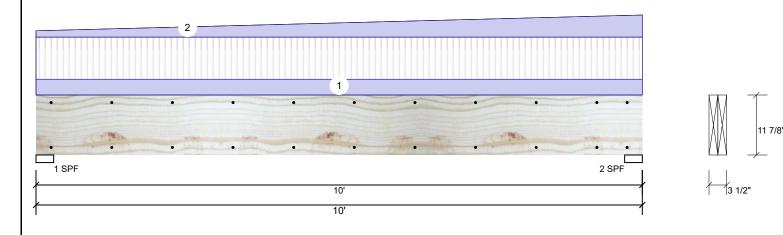

Member Information Reactions UNPATTERNED Ib (Uplift) Application: Snow Wind Type: Floor Brg Direction Live Dead Const Plies: 2 Design Method: ASD 2000 0 Vertical 1341 n 0 1 Moisture Condition: Dry **Building Code:** IBC 2012 2 Vertical 2000 1602 0 0 0 Deflection LL: 480 Load Sharing: No Deflection TL: 360 Deck: Not Checked Importance: Normal - II Temperature: Temp <= 100°F **Bearings** Bearing Length Dir. Cap. React D/L lb Total Ld. Case Ld. Comb. 1-SPF 3.500" D+L Vert 1341 / 2000 3341 L 2 - SPF 3.500" Vert 69% 1602 / 2000 3602 L D+I

Analysis Results

| Analysis | Actual | Location | Allowed | Capacity | Comb. | Case |
|--------------|----------------|----------|---------------|-------------|-------|------|
| Moment | 7903 ft-lb | 5'1" | 19911 ft-lb | 0.397 (40%) | D+L | L |
| Unbraced | 7903 ft-lb | 5'1" | 9628 ft-lb | 0.821 (82%) | D+L | L |
| Shear | 2638 lb | 8'8 5/8" | 8867 lb | 0.297 (30%) | D+L | L |
| LL Defl inch | 0.089 (L/1287) | 5' | 0.239 (L/480) | 0.373 (37%) | L | L |
| TL Defl inch | 0.154 (L/741) | 5' 5/16" | 0.318 (L/360) | 0.486 (49%) | D+L | L |

Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 3 Refer to last page of calculations for fasteners required for specified loads.
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be laterally braced at end bearings.
- 7 Bottom must be laterally braced at end bearings.
- 8 Lateral slenderness ratio based on single ply width.

| T ==================================== | | | | | | | | | | |
|--|---------------|-----------------|------------|------|----------|--------|-----------|----------|-------------|----------|
| ID | Load Type | Location | Trib Width | Side | Dead 0.9 | Live 1 | Snow 1.15 | Wind 1.6 | Const. 1.25 | Comments |
| 1 | Tie-In | 0-0-0 to 10-0-0 | 10-0-0 | Тор | 15 PSF | 40 PSF | 0 PSF | 0 PSF | 0 PSF | Roof |
| 2 | Tapered Start | 0-0-0 | | Тор | 60 PLF | 0 PLF | 0 PLF | 0 PLF | 0 PLF | B1GE |
| | End | 10-0-0 | | | 210 PLF | 0 PLF | 0 PLF | 0 PLF | 0 PLF | |
| | Self Weight | | | | 9 PLF | | | | | |

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive
- Handling & Installation
- LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code
- approvals

 Damaged Beams must not be used
- Design assumes top edge is laterally restrained
 Provide lateral support at bearing points to avoid
 lateral displacement and rotation
- 6. For flat roofs provide proper drainage to prevent ponding

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



This design is valid until 11/3/2024

Client: Watermark Homes

Project: Address:

Date: 8/3/2022

Input by: Curtis Quick


Job Name: The Pinyon Pine Beams

Page 2 of 7

Project #:

2-Ply - PASSED GDH (PT 1) Kerto-S LVL 1.750" X 11.875"

Level: Level



Multi-Ply Analysis

Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c., Maximum end distance not to exceed 6".

| 1 3 | | ` | , |
|--------------------------|-----------|---|---|
| Capacity | 0.0 % | | |
| Load | 0.0 PLF | | |
| Yield Limit per Foot | 163.7 PLF | | |
| Yield Limit per Fastener | 81.9 lb. | | |
| Yield Mode | IV | | |
| Edge Distance | 1 1/2" | | |
| Min. End Distance | 3" | | |
| Load Combination | | | |
| Duration Factor | 1.00 | | |

Notes

NOtes
Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

Handling & Installation

- Handling & Installation

 1. UVI beams must not be cut or drilled

 2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

 3. Damaged Beams must not be used

 4. Design assumes top edge is laterally restrained

 5. Provide lateral support at bearing points to avoid lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 11/3/2024

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info







Client:

Project: Address: Watermark Homes

Date: 8/3/2022 Input by: Curtis Quick

Job Name: The Pinyon Pine Beams


Page 3 of 7

D+L

D+I

Project #:

1.750" X 11.875" Kerto-S LVL GDH (PT 2) 2-Ply - PASSED Level: Level

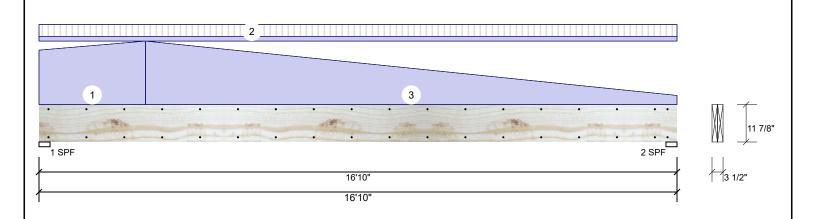

Member Information Reactions UNPATTERNED Ib (Uplift) Application: Wind Type: Floor Brg Direction Live Dead Snow Const Plies: 2 Design Method: ASD 337 1588 0 Vertical n 0 1 Moisture Condition: Dry **Building Code:** IBC 2012 2 Vertical 337 1051 0 0 0 Deflection LL: 480 Load Sharing: No Deflection TL: 360 Deck: Not Checked Importance: Normal - II Temperature: Temp <= 100°F **Bearings** Bearing Length Dir. Cap. React D/L lb Total Ld. Case Ld. Comb.

1-SPF 3.500"

2 - SPF 3.500"

Vert

Vert

27%

1588 / 337

1051 / 337

1925 L

1387 L

Analysis Results

| Analysis | Actual | Location | Allowed | Capacity | Comb. | Case |
|--------------|----------------|------------|---------------|-----------------|-------|------|
| Moment | 6794 ft-lb | 7'8 7/8" | 19911 ft-lb | 0.341 (34%) | D+L | L |
| Unbraced | 6794 ft-lb | 7'8 7/8" | 6796 ft-lb | 1.000 (100%) | D+L | L |
| Shear | 1613 lb | 1'3 3/8" | 8867 lb | 0.182 (18%) | D+L | L |
| LL Defl inch | 0.070 (L/2809) | 8'5 1/16" | 0.409 (L/480) | 0.171 (17%) | L | L |
| TL Defl inch | 0.352 (L/558) | 8'2 13/16" | 0.546 (L/360) | 0.645 (64%) | D+L | L |

Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 3 Refer to last page of calculations for fasteners required for specified loads.
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be laterally braced at a maximum of 14'6 5/8" o.c.
- 7 Bottom must be laterally braced at end bearings.
- 8 Lateral slenderness ratio based on single ply width.

| | | 9 | | | | | | | | | |
|----|---------------|------------------|------------|------|----------|--------|-----------|----------|-------------|----------|--|
| ID | Load Type | Location | Trib Width | Side | Dead 0.9 | Live 1 | Snow 1.15 | Wind 1.6 | Const. 1.25 | Comments | |
| 1 | Tapered Start | 0-0-0 | | Тор | 180 PLF | 0 PLF | 0 PLF | 0 PLF | 0 PLF | B1GE | |
| | End | 2-9-12 | | | 210 PLF | 0 PLF | 0 PLF | 0 PLF | 0 PLF | | |
| 2 | Tie-In | 0-0-0 to 16-10-0 | 1-0-0 | Тор | 15 PSF | 40 PSF | 0 PSF | 0 PSF | 0 PSF | Roof | |
| 3 | Tapered Start | 2-9-12 | | Тор | 210 PLF | 0 PLF | 0 PLF | 0 PLF | 0 PLF | B1GE | |
| | | | | | | | | | | | |

Continued on page 2...

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive
- Handling & Installation
- LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code
- approvals


 Damaged Beams must not be used
- Design assumes top edge is laterally restrained
 Provide lateral support at bearing points to avoid
 lateral displacement and rotation
- 6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 11/3/2024

Manufacturer Info Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851

(800) 622-5850 www.metsawood.com/us





Client:

Project: Address: Watermark Homes


Date: 8/3/2022 Input by:

Curtis Quick Job Name: The Pinyon Pine Beams Page 4 of 7

Project #:

2-Ply - PASSED Kerto-S LVL 1.750" X 11.875" GDH (PT 2)

Level: Level

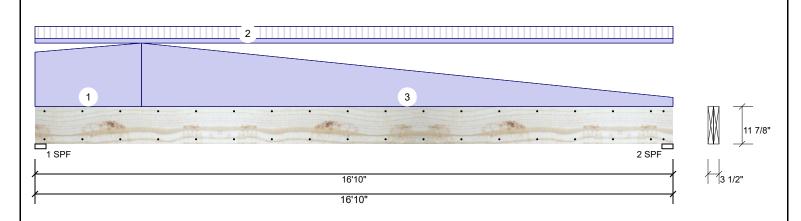

.Continued from page 1

Load Type ID Location Trib Width Side Dead 0.9 Live 1 Snow 1.15 Wind 1.6 Const. 1.25 Comments End 16-10-0 30 PLF 0 PLF 0 PLF 0 PLF 0 PLF 9 PLF Self Weight

NOtes
Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

Handling & Installation

- Handling & Installation

 1. UVI beams must not be cut or drilled

 2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

 3. Damaged Beams must not be used

 4. Design assumes top edge is laterally restrained

 5. Provide lateral support at bearing points to avoid lateral displacement and rotation
- 6. For flat roofs provide proper drainage to prevent ponding

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



This design is valid until 11/3/2024

Client: Watermark Homes

Project: Address: Date: 8/3/2022


Input by: Curtis Quick

Job Name: The Pinyon Pine Beams

Page 5 of 7

Project #:

Kerto-S LVL 1.750" X 11.875" GDH (PT 2) 2-Ply - PASSED Level: Level

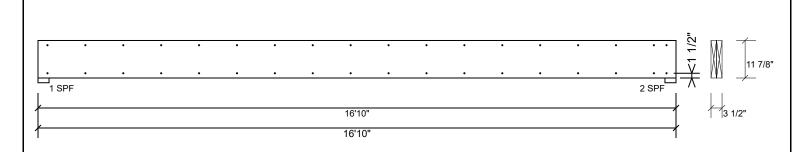

Multi-Ply Analysis

Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c.. Maximum end distance not to exceed 6".

| 1 3 | | ` | , |
|--------------------------|-----------|---|---|
| Capacity | 0.0 % | | |
| Load | 0.0 PLF | | |
| Yield Limit per Foot | 163.7 PLF | | |
| Yield Limit per Fastener | 81.9 lb. | | |
| Yield Mode | IV | | |
| Edge Distance | 1 1/2" | | |
| Min. End Distance | 3" | | |
| Load Combination | | | |
| Duration Factor | 1.00 | | |

Notes

NOtes
Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

Handling & Installation

Handling & Installation

1. UVI beams must not be cut or drilled

2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

3. Damaged Beams must not be used

4. Design assumes top edge is laterally restrained

5. Provide lateral support at bearing points to avoid lateral displacement and rotation

This design is valid until 11/3/2024

For flat roofs provide proper drainage to prevent ponding

Manufacturer Info

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us







Client:

Project: Address: Watermark Homes

Date: 8/3/2022 Input by:


Curtis Quick Job Name: The Pinyon Pine Beams Page 6 of 7

Project #:

Kerto-S LVL BM₁

1.750" X 9.250" 2-Ply - PASSED

Level: Level

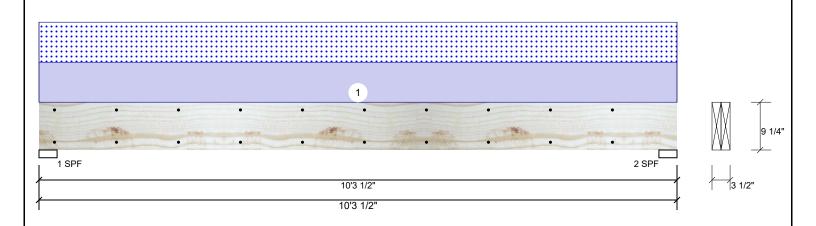

| Member Infor | mation | | | Rea | ctions UNP | ATTERI | NED Ib | (Uplift) | | | |
|--------------------|---------------|----------------|-------------|-----|--------------|--------|--------|--------------|-------|----------|-----------|
| Type: | Girder | Application: | Floor | Brg | Direction | Live | 9 | Dead | Snow | Wind | Const |
| Plies: | 2 | Design Method: | ASD | 1 | Vertical | (|) | 1534 | 1497 | 0 | 0 |
| Moisture Condition | n: Dry | Building Code: | IBC 2012 | 2 | Vertical | (|) | 1534 | 1497 | 0 | 0 |
| Deflection LL: | 480 | Load Sharing: | No | | | | | | | | |
| Deflection TL: | 360 | Deck: | Not Checked | | | | | | | | |
| Importance: | Normal - II | | | | | | | | | | |
| Temperature: | Temp <= 100°F | | | | | | | | | | |
| | | | | Bea | rings | | | | | | |
| | | | | Bea | aring Length | Dir. | Сар. | React D/L lb | Total | Ld. Case | Ld. Comb. |
| | | | | 1 - | SPF 3.500" | Vert | 58% | 1534 / 1497 | 3032 | L | D+S |
| | | | | 2 - | SPF 3.500" | Vert | 58% | 1534 / 1497 | 3032 | L | D+S |

Analysis Results

| ſ | Analysis | Actual | Location | Allowed | Capacity | Comb. | Case |
|---|--------------|---------------|----------|---------------|-------------|-------|------|
| ı | Moment | 7121 ft-lb | 5'1 3/4" | 14423 ft-lb | 0.494 (49%) | D+S | L |
| ı | Unbraced | 7121 ft-lb | 5'1 3/4" | 7519 ft-lb | 0.947 (95%) | D+S | L |
| ı | Shear | 2411 lb | 1' 3/4" | 7943 lb | 0.304 (30%) | D+S | L |
| ı | LL Defl inch | 0.145 (L/813) | 5'1 3/4" | 0.246 (L/480) | 0.590 (59%) | S | L |
| ı | TL Defl inch | 0.294 (L/402) | 5'1 3/4" | 0.328 (L/360) | 0.896 (90%) | D+S | L |

Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 3 Refer to last page of calculations for fasteners required for specified loads.
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be laterally braced at end bearings.
- 7 Bottom must be laterally braced at end bearings.
- 8 Lateral slenderness ratio based on single ply width.

| ID | Load Type | Location | Trib Width | Side | Dead 0.9 | Live 1 | Snow 1.15 | Wind 1.6 | Const. 1.25 | Comments | |
|----|-------------|----------|------------|------|----------|--------|-----------|----------|-------------|----------|--|
| 1 | Uniform | | | Тор | 291 PLF | 0 PLF | 291 PLF | 0 PLF | 0 PLF | A4 | |
| | Self Weight | | | | 7 PLF | | | | | | |

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

Handling & Installation

- LVL beams must not be cut or drilled
 Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

 2 Damaged Beams must not be used
- Design assumes top edge is laterally restrained
 Provide lateral support at bearing points to avoid
 lateral displacement and rotation

For flat roofs provide proper drainage to prevent ponding

This design is valid until 11/3/2024

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info





Client: Watermark Homes

Project: Address: Date: 8/3/2022 Input by: Curtis Quick

Job Name: The Pinyon Pine Beams

Page 7 of 7


Project #:

Kerto-S LVL BM1

1.750" X 9.250"

2-Ply - PASSED

Level: Level

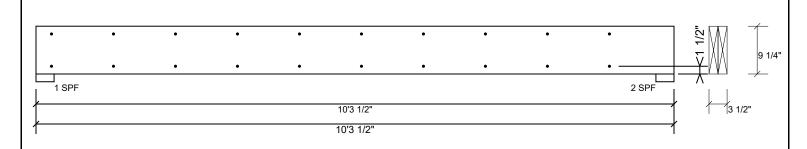

Multi-Ply Analysis

Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c.. Maximum end distance not to exceed 6".

| | * |
|--------------------------|---|
| Capacity | 0.0 % |
| Load | 0.0 PLF |
| Yield Limit per Foot | 163.7 PLF |
| Yield Limit per Fastener | 81.9 lb. |
| Yield Mode | IV |
| Edge Distance | 1 1/2" |
| Min. End Distance | 3" |
| Load Combination | |
| Duration Factor | 1.00 |

Notes

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

Handling & Installation

- Handling & Installation

 1. UVI beams must not be cut or drilled

 2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

 3. Damaged Beams must not be used

 4. Design assumes top edge is laterally restrained

 5. Provide lateral support at bearing points to avoid lateral displacement and rotation
- - - This design is valid until 11/3/2024

For flat roofs provide proper drainage to prevent ponding

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info



