

Client: Project: Address: Weaver Development Lindsay 1553 "A" Lindsay 1553 "A"


Date: 1/23/2023

Input by: Christine Shivy

Job Name: Project #:

Kerto-S LVL 2-Ply - PASSED 1.750" X 14.000" **GDH**

Level: Level

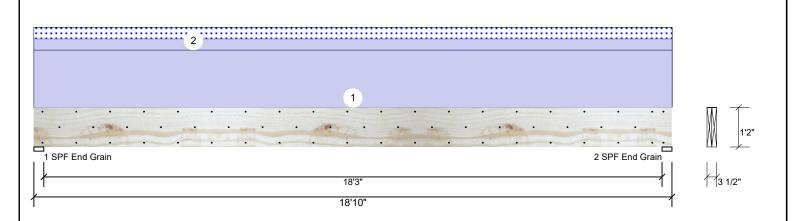

Member Information Reactions UNPATTERNED Ib (Uplift) Type: Girder Application: Floor Brg Live Wind Direction Dead Snow Plies: 2 Design Method: ASD Vertical 0 2363 377 0 1 Moisture Condition: Dry **Building Code:** IBC 2012 O 2363 377 O 2 Vertical Deflection LL: 480 Load Sharing: No Deflection TL: 360 Deck: Not Checked Importance: Normal - II Temperature: Temp <= 100°F **Bearings** Bearing Length Dir. Cap. React D/L lb Total Ld. Case Ld. Comb. D+S 1 - SPF 3.500" Vert 2363 / 377 2739 I

End Grain

End Grain

2 - SPF 3.500"

Analysis Results

	Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
l	Moment	10589 ft-lb	9'5"	24299 ft-lb	0.436 (44%)	D	Uniform
	Unbraced	12277 ft-lb	9'5"	12288 ft-lb	0.999 (100%)	D+S	L
l	Shear	2009 lb	17'4 1/2"	9408 lb	0.214 (21%)	D	Uniform
l	LL Defl inch	0.068 (L/3239)	9'5 1/16"	0.459 (L/480)	0.148 (15%)	S	L
	TL Defl inch	0.495 (L/445)	9'5 1/16"	0.612 (L/360)	0.808 (81%)	D+S	L

Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Fasten all plies using 3 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 3 Refer to last page of calculations for fasteners required for specified loads.
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be laterally braced at a maximum of 8'6 1/16" o.c.
- 7 Bottom must be laterally braced at end bearings.
- 8 Lateral slenderness ratio based on single ply width.

		· - · · · · · · · · · · · · · · · · · ·									
ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments	
1	Uniform			Тор	200 PLF	0 PLF	0 PLF	0 PLF	0 PLF	Exterior Siding / Plywood	
2	Uniform			Тор	40 PLF	0 PLF	40 PLF	0 PLF	0 PLF	2'0" Roof Load	
	Self Weight				11 PI F						

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

Handling & Installation

- LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals Damaged Beams must not be used

- Design assumes top edge is laterally restrained
 Provide lateral support at bearing points to avoid
 lateral displacement and rotation

For flat roofs provide proper drainage to prevent ponding

This design is valid until 11/3/2024

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info

27%

Vert

2363 / 377

2739 L

Comtech, Inc. Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



Page 1 of 2

Const

D+S

0

0





Client: Weaver Development Project: Lindsay 1553 "A" Address: Lindsay 1553 "A"


Date: 1/23/2023 Input by: Christine Shivy

Job Name:

Project #:

Kerto-S LVL 1.750" X 14.000" 2-Ply - PASSED **GDH**

Level: Level



Multi-Ply Analysis

Fasten all plies using 3 rows of 10d Box nails (.128x3") at 12" o.c.. Maximum end distance not to exceed 6".

rasterrain pines asing s	TOWS OF TOO BOX Halls (.TEOXS) at
Capacity	0.0 %
Load	0.0 PLF
Yield Limit per Foot	245.6 PLF
Yield Limit per Fastener	81.9 lb.
Yield Mode	IV
Edge Distance	1 1/2"
Min. End Distance	3"
Load Combination	
Duration Factor	1.00

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

Handling & Installation

- Handling & Installation

 1. IVI beams must not be cut or drilled

 2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

 3. Damaged Beams must not be used

 4. Design assumes top edge is laterally restrained

 5. Provide lateral support at bearing points to avoid lateral displacement and rotation

For flat roofs provide proper drainage to prevent ponding

This design is valid until 11/3/2024

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



Page 2 of 2





Client: Project: Address: Weaver Development Lindsay 1553 "A" Lindsay 1553 "A"

Date: 1/23/2023


Input by: Christine Shivy

Job Name: Project #:

1.750" X 11.875" **Kerto-S LVL** GDH-3

2-Ply - PASSED

Level: Level

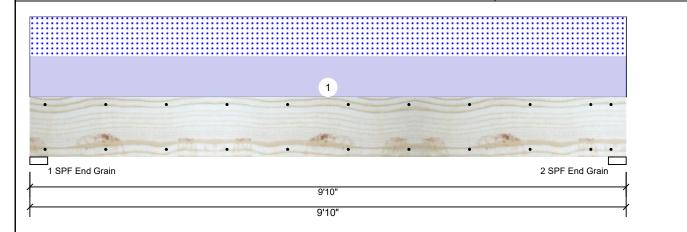


Floor

ASD

No

IBC 2012

Not Checked



Page 1 of 2

Member Information

Type: Plies: 2 Moisture Condition: Dry Deflection LL: 480 Deflection TL: 360 Importance: Normal - II

Temperature: Temp <= 100°F

Reactions UNPATTERNED Ib (Uplift)

Brg	Direction	Live	Dead	Snow	Wind	Const
1	Vertical	0	1211	1165	0	0
2	Vertical	0	1211	1165	0	0

Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	5309 ft-lb	4'11"	22897 ft-lb	0.232 (23%)	D+S	L
Unbraced	5309 ft-lb	4'11"	9857 ft-lb	0.539 (54%)	D+S	L
Shear	1766 lb	1'3 3/8"	10197 lb	0.173 (17%)	D+S	L
LL Defl inch	0.049 (L/2278)	4'11"	0.234 (L/480)	0.211 (21%)	S	L
TL Defl inch	0.101 (L/1117)	4'11"	0.312 (L/360)	0.322 (32%)	D+S	L

Application:

Design Method:

Building Code:

Load Sharing:

Deck:

Bearings

Bearing	Length	Dir.	Cap. F	React D/L lb	Iotal	Ld. Case	Ld. Comb.
1 - SPF End Grain	3.500"	Vert	23%	1211 / 1165	2376	L	D+S
2 - SPF End Grain	3.500"	Vert	23%	1211 / 1165	2376	L	D+S

Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 3 Refer to last page of calculations for fasteners required for specified loads.
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be laterally braced at end bearings.
- 7 Bottom must be laterally braced at end bearings.
- 8 Lateral slenderness ratio based on single ply width.

ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments
1	Uniform			Тор	237 PLF	0 PLF	237 PLF	0 PLF	0 PLF	G1
	Salf Waight				0 DI E					

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown, It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

Handling & Installation

- LVL beams must not be cut or drilled Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals Damaged Beams must not be used
- Design assumes top edge is laterally restrained
 Provide lateral support at bearing points to avoid
 lateral displacement and rotation

This design is valid until 11/3/2024

For flat roofs provide proper drainage to prevent ponding

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS





Client: Project: Address: Weaver Development Lindsay 1553 "A" Lindsay 1553 "A"

Date: 1/23/2023


Input by: Christine Shivy Job Name: GDH

Project #:

GDH-3 **Kerto-S LVL** 1.750" X 11.875"

2-Ply - PASSED

Level: Level

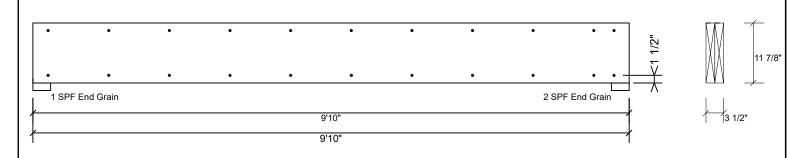

Multi-Ply Analysis

Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c.. Maximum end distance not to exceed 6".

rasterrail piles asing E	TOWS OF TOO BOX Halls (.TEOXS) at
Capacity	0.0 %
Load	0.0 PLF
Yield Limit per Foot	163.7 PLF
Yield Limit per Fastener	81.9 lb.
Yield Mode	IV
Edge Distance	1 1/2"
Min. End Distance	3"
Load Combination	
Duration Factor	1.00

Notes

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

Handling & Installation

- Handling & Installation

 1. IVI beams must not be cut or drilled

 2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

 3. Damaged Beams must not be used

 4. Design assumes top edge is laterally restrained

 5. Provide lateral support at bearing points to avoid lateral displacement and rotation
- For flat roofs provide proper drainage to prevent ponding

This design is valid until 11/3/2024

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



Page 2 of 2

