

Client: Signature


Project: Address: Date: 8/2/2023

Input by: Anthony Williams

Job Name: Bailey Project #: J0623-2848

1.750" X 11.875" **Kerto-S LVL** 2-Ply - PASSED **GDH**

Level: Level

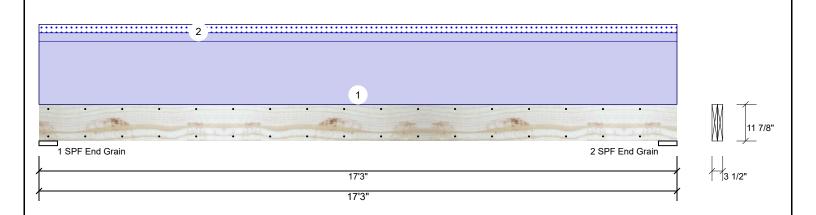

Member Information				Read	Reactions UNPATTERNED Ib (Uplift)						
Type:	Girder	Application:	Floor	Brg	Direction	Live	Dead	Snow	Wind	Const	
Plies:	2	Design Method:	ASD	1	Vertical	0	1546	173	0	0	
Moisture Conditi	on: Dry	Building Code:	IBC 2012	2	Vertical	0	1546	173	0	0	
Deflection LL:	480	Load Sharing:	No								
Deflection TL:	360	Deck:	Not Checked								
Importance:	Normal - II										
Temperature:	Temn <= 100°F										

Bearings Bearing Length

End Grain

End Grain

1-SPF 6.000"

2-SPF 6.000"

Dir.

Vert

Vert

Cap. React D/L lb

10%

1546 / 173

1546 / 173

Total Ld. Case

1718 L

1718 L

Ld. Comb.

D+S

D+S

Analysis Results

Analysis	Actual	Location	Allowed	Capacity	Comb.	Case
Moment	6008 ft-lb	8'7 1/2"	17919 ft-lb	0.335 (34%)	D	Uniform
Unbraced	6678 ft-lb	8'7 1/2"	6684 ft-lb	0.999 (100%)	D+S	L
Shear	1288 lb	1'5 7/8"	7980 lb	0.161 (16%)	D	Uniform
LL Defl inch	0.035 (L/5617)	8'7 9/16"	0.409 (L/480)	0.085 (9%)	S	L
TL Defl inch	0.348 (L/564)	8'7 9/16"	0.546 (L/360)	0.638 (64%)	D+S	L

Design Notes

- 1 Provide support to prevent lateral movement and rotation at the end bearings. Lateral support may also be required at the interior bearings by the building code.
- 2 Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c. Maximum end distance not to exceed 6".
- 3 Refer to last page of calculations for fasteners required for specified loads.
- 4 Girders are designed to be supported on the bottom edge only.
- 5 Top loads must be supported equally by all plies.
- 6 Top must be laterally braced at a maximum of 14'10 7/16" o.c.
- 7 Bottom must be laterally braced at end bearings

	oo latorany bracea at e	beage.									
8 Lateral slende	rness ratio based on s	single ply width.									
ID	Load Type	Location	Trib Width	Side	Dead 0.9	Live 1	Snow 1.15	Wind 1.6	Const. 1.25	Comments	
1	Uniform			Тор	150 PLF	0 PLF	0 PLF	0 PLF	0 PLF	WALL	
2	Tie-In	0-0-0 to 17-3-0	0-6-0	Тор	40 PSF	0 PSF	40 PSF	0 PSF	0 PSF	ROOF	
	Self Weight				9 PLF						

Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

- Handling & Installation
- LVL beams must not be cut or drilled
 Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

 2 Damaged Beams must not be used

- Design assumes top edge is laterally restrained
 Provide lateral support at bearing points to avoid
 lateral displacement and rotation

6. For flat roofs provide proper drainage to prevent ponding

This design is valid until 11/3/2024

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



Page 1 of 2



isDesign

Client: Signature


Project: Address:

8/2/2023 Input by:

Anthony Williams Job Name: Bailey

Project #: J0623-2848 Level: Level

1.750" X 11.875" 2-Ply - PASSED **Kerto-S LVL GDH**



Multi-Ply Analysis

Fasten all plies using 2 rows of 10d Box nails (.128x3") at 12" o.c.. Maximum end distance not to exceed 6".

		. ,
Capacity	0.0 %	
Load	0.0 PLF	
Yield Limit per Foot	163.7 PLF	
Yield Limit per Fastener	81.9 lb.	
Yield Mode	IV	
Edge Distance	1 1/2"	
Min. End Distance	3"	
Load Combination		
Duration Factor	1.00	

Notes

NOtes
Calculated Structured Designs is responsible only of the structural adequacy of this component based on the design criteria and loadings shown. It is the responsibility of the customer and/or the contractor to ensure the component suitability of the intended application, and to verify the dimensions and loads.

- Dry service conditions, unless noted otherwise
 LVL not to be treated with fire retardant or corrosive

Handling & Installation

- Handling & Installation

 1. UVI beams must not be cut or drilled

 2. Refer to manufacturer's product information regarding installation requirements, multi-ply fastening details, beam strength values, and code approvals

 3. Damaged Beams must not be used

 4. Design assumes top edge is laterally restrained

 5. Provide lateral support at bearing points to avoid lateral displacement and rotation

- For flat roofs provide proper drainage to prevent ponding

This design is valid until 11/3/2024

Metsä Wood 301 Merritt 7 Building, 2nd Floor Norwalk, CT 06851 (800) 622-5850 www.metsawood.com/us

Manufacturer Info

Comtech, Inc. 1001 S. Reilly Road, Suite #639 Fayetteville, NC USA 28314 910-864-TRUS



Page 2 of 2

