

# Harnett County Department of Public Health

SR, 1426

## Improvement Permit

A building permit cannot be issued with only an Improvement Permit

ISSUED TO: Kara Homes, INC

PROPERTY LOCATION: 125 Cotton Fields Ln, Fuquay Varina  
SUBDIVISION Cotton Farms LOT # 26

NEW  REPAIR  EXPANSION   
Type of Structure: SFD 49' x 56'

Site Improvements required prior to Construction Authorization Issuance:

Proposed Wastewater System Type: 25% REDUCTION

Projected Daily Flow: 360 GPD

Number of bedrooms: 3 Number of Occupants: 6 max

Basement  Yes  No

Pump Required:  Yes  No  May be required based on final location and elevations of facilities

Type of Water Supply:  Community  Public  Well Distance from well \_\_\_\_\_ feet

Permit valid for:  Five years  
 No expiration

Permit conditions: \_\_\_\_\_

Authorized State Agent: James E. Marshall JR REGS

Date: 9-14-23

SEE ATTACHED SITE SKETCH

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements. This site is subject to revocation if the site plan, plat, or the intended use changes. The Improvement Permit shall not be affected by a change in ownership of the site. This permit is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to conditions of this permit.

## Construction Authorization

(Required for Building Permit)

The construction and installation requirements of Rules .1950, .1952, .1954, .1955, .1956, .1957, .1958, and .1959 are incorporated by references into this permit and shall be met. Systems shall be installed in accordance with the attached system layout.

ISSUED TO: Kara Homes, INC

PROPERTY LOCATION: 125 Cotton Fields Ln, Fuquay Varina  
SUBDIVISION Cotton Farms LOT # 26

Facility Type: SFD 49' x 56'  New  Expansion  Repair

Basement?  Yes  No Basement Fixtures?  Yes  No

Type of Wastewater System\*\* 25% Reduction System (Initial) Wastewater Flow: 360 GPD

(See note below, if applicable ) 50% Reduction (Repair)

### Installation Requirements/Conditions

Septic Tank Size 1000 gallons

Number of trenches 3

Exact length of each trench 100 feet

Trench Spacing: 9 Feet on Center

Pump Tank Size 1000 gallons

Trenches shall be installed on contour at a Maximum Trench Depth of: 15" max inches

Soil Cover: 6 inches

(Trench bottoms shall be level to +1-1/4" in all directions)

(Maximum soil cover shall not exceed 36" above the trench bottom)

Pump Requirements: \_\_\_\_\_ ft. TDH vs. \_\_\_\_\_ GPM

Aggregate Depth: 6 inches below pipe

Conditions: 6" of Cover Required.

2 inches above pipe

12 inches total

**WATER LINES (INCLUDING IRRIGATION) MUST BE 10FT. FROM ANY PART OF SEPTIC SYSTEM OR REPAIR AREA.  
NO UTILITIES ALLOWED IN INITIAL OR REPAIR DRAIN FIELD AREA.**

\*\*If applicable: I understand the system type specified is different from the type specified on the application. I accept the specifications of this permit.

Owner/Legal Representative Signature: \_\_\_\_\_

Date: \_\_\_\_\_

This Construction Authorization is subject to revocation if the site plan, plat, or the intended use changes. The Construction Authorization shall not be transferred when there is a change in ownership of the site. This Construction Authorization is subject to compliance with the provisions of the Laws and Rules for Sewage Treatment and Disposal and to the conditions of this permit. SEE ATTACHED SITE SKETCH

Authorized State Agent: James E. Marshall JR REGS

Date: 9-14-23

Construction Authorization Expiration Date: 9-14-28

SR 1426


Application # SFD 2307-0069

### Harnett County Department of Public Health Site Sketch

Property Location: 125 Cotton Fields LN, Fuquay Varina

Issued To: Kara HAMES, INC Subdivision Cotton Farms Lot # 26

Authorized State Agent: James E. Manhart ~~128115~~ Date: 9-14-23

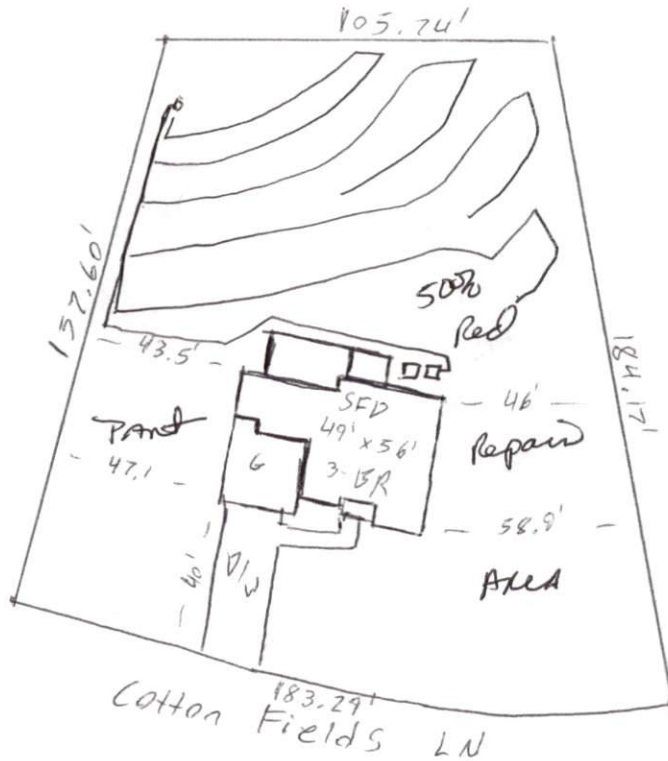

This drawing is for illustrative purposes only. System installation must meet all pertinent laws, rules, and regulations.